

Magnetic Properties of Monolayer Thickness Co Films on InP(2x4) Reconstruction Surface

Yong-Sung Park*, Jong-Ryul Jeong, Jeong-Won Lee, and Sung-Chul Shin

Department of Physics and Center for Nanospinics of Spintronic Materials, Korea Advanced Institute of Science and Technology, Daejeon 305-701, Korea

*Corresponding author: marabino@kaist.ac.kr, Phone: +82 42 869 8167, Fax: +82 42 869 8162

Recently, ferromagnetic ultrathin films prepared on single-crystal semiconductor substrates have been of great interest due to the possible development of spintronics [1,2]. In this study, we have investigated magnetic properties of monolayer(ML)-thickness Co films deposited on InP(2x4) reconstruction surface using *in situ* Surface Magneto-Optical Kerr Effects (SMOKE) measurement system. InP(2x4) reconstruction surface, obtained by repeated sputtering and annealing, was confirmed by RHEED and STM measurements. Fig. 1 shows the dependence of coercivity on the Co film thickness. As shown in Fig. 1, we have observed three distinguishable regions showing different magnetic properties depending on the Co thickness. In the Co film thickness smaller than 7 ML, no SMOKE signal was detected, which implies existence of magnetic dead layer at room temperature. In the following thickness between 8 ML and 15 ML, both longitudinal and polar Kerr hysteresis loops were observed. In the film thickness larger than 16 ML, only longitudinal MOKE signal without polar signal was detected, which implies existence of in-plane anisotropy in this thickness region.

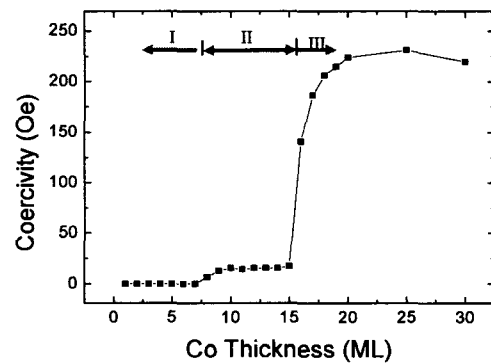


Fig. 1. Dependence of coercivity on the Co layer thickness.

This work was supported by the Korean Ministry of Science and Technology through the Creative Research Initiatives Project.

References

- [1] G. A. Prinz, Science **282**, 1660 (1998).
- [2] O. Thomas et al., Phys. Rev. Lett. **90**, 017205 (2003).