

KA-BAND ANTENNA PERFORMANCE ANALYSIS OF COMS SATELLITE

Jeom-Hun Lee[†], Jang-Sup Choi, and Seong Pal Lee

Communications Satellite Development Group, ETRI, Daejeon 305-350, Korea

email: hoonlee@etri.re.kr

(Received September 25, 2004; Accepted October 1, 2004)

ABSTRACT

This paper describes Ka-band antenna performance analysis of COMS satellite. The key parameters of the antenna system are optimal antenna diameter, feed horn type and horn size, F/D, and the coordinate of offset horns. The paper deals with the method to determine design core parameters of optimal antenna diameter, feed horn type and horn size, F/D, and the coordinate of offset horns, and the performances of design result.

Keywords: satellite antenna, multibeam antenna

1. INTRODUCTION

This paper describes the antenna system analysis of communication satellite to meet the requirement of gain, sidelobe, cross-polarization discrimination and cross-polarization isolation, so on at circular three 0.7 deg service coverages of S Korea, N Korea, and Dong Bei with the pointing error of ± 0.1 degree. The antenna system is the deployable type comprising two single offset reflector antenna attached at east panel and west panel of spacecraft at Ka-band frequency. Other key requirement is that N Korea and Dong Bei beam re-use the frequency, which is same for frequency but is different for polarization. One must cross-polarization discrimination and cross-polarization isolation.

The design core parameters of the antenna system are optimal antenna diameter, feed horn type and horn size, F/D, and the coordinate of offset horns. Because the antenna system transmit and receive simultaneously with one reflector, the initial reflector diameter is roughly determined by the graph of EOC angle, which give the directivity vs antenna diameter for EOC angle. The scan angle of Dong Bei beam is determined by the coordinates of Dong Bei beam center, S Korea beam center, and satellite. The horn's offset angle from the focal point of S Korea's horn is determined by the beam deviation factor (BDF) and scan angle of Dong Bei beam. By offset angle of Dong Bei's horn, the horn size is determined, and BDF is mainly determined by the F/D of antenna geometry. Also F/D effect the cross-polarization discrimination.

The paper describe the method to determine design core parameters of optimal antenna diameter, feed horn type and horn size, F/D, and the coordinate of offset horns, and the performances of design result.

[†]corresponding author

2. ANTENNA OVERVIEW

The antenna system is intended to provide the satellite coverage to the South Korea, North Korea, and Dong bei area (Northeast area of China) from a geostationary orbit location of 128.2 deg East longitude. The antenna system employs two (2) single offset reflector and three feed assembly. This geometry and the associated feed components support linear polarization for the communication services.

The antenna system comprise the two parts: East Panel and West panel of spacecraft. The antenna system for East panel of spacecraft comprise one (1) single Offset reflector assembly, and two (2) feed assembly. The antenna system also for west panel of spacecraft shall comprise one (1) single offset reflector assembly, and single (1) feed assembly. The antenna system supporting structure support the main, the horn and diplexer, and waveguide assemblies.

The service coverage area are circular, 0.7 deg for transmit and for receive, centered about the beam axis. Typical beam coverages are shown in Figure 1 for both transmit and receive. This coverage includes 0.1 deg pointing uncertainty. The frequency range 19.8 20.2 GHz for transmit and 29.60-30.00 GHz for receive.

A receive and transmit antenna provide the vertical polarization for South Korea area, horizontal polarization for North Korea area, and vertical polarization for Dongbei area. The gain slope at EOC without pointing error is less than 11 dB/deg in receive frequency band, and less than 22 dB/deg in transmit frequency band. Other requirements are that sidelobe level is more than 20 dB, and EOC directivity at 0.7 deg are 43.46 dBi for transmit, and 44.99 dBi for receive. The cross-polarization isolation is more than 30 dB.

3. KA-BAND ANTENNA ANALYSIS

2.1 Ka-band Antenna Properties

Because the antenna system transmit and receive simultaneously with one reflector, the initial reflector diameter is roughly determined by the graph of EOC angle, which give the directivity vs the antenna diameter for EOC angle. The on-axis directivity G_o a uniformly illuminated circular aperture of the diameter D is

$$G_o(dB) = 10 \log(110\eta D_m^2 f_{GHz}^2) \quad (1)$$

Where the coefficient factor of antenna is $0 \leq \eta \leq 1$. For a uniformly illuminated aperture, the half-power (3dB) beamwidth is:

$$\theta_3 = \frac{\lambda}{D} \text{ rad} \quad \text{or} \quad \theta_3 = \frac{k \cdot \lambda}{D} \text{ deg} \quad (2)$$

Where k is beamwith constant. In this case, k is 57.297. But the edge taper of a practical antenna is 5 dB to 20 dB, and the average is about 15 dB. In this case, k is around 70 (Milligan 1955). Therefore,

$$\theta_3 = 70 \frac{3}{10 \cdot f_{GHz} D_m} \text{ deg} \quad (3)$$

$$\theta_3 = \frac{21}{f_{GHz} D_m} \quad (4)$$

The shape of the beam antenna near axis can be approximated by a number of functions, including a squared trigonometrical function.

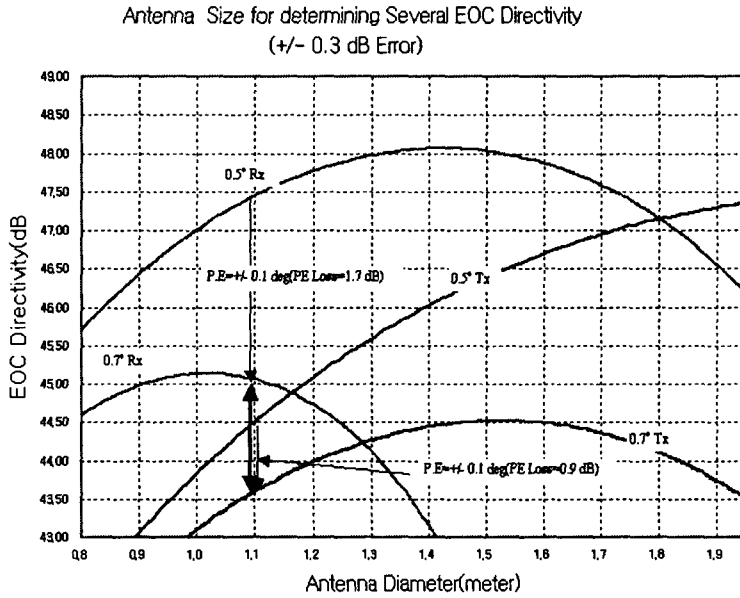


Figure 1. EOC Directivity vs antenna diameter at 20/30 GHz.

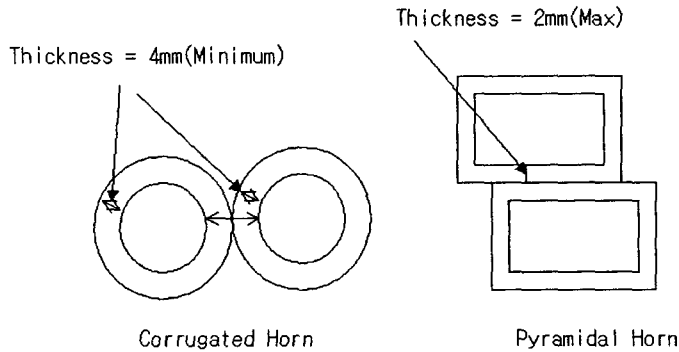


Figure 2. Corrugated Horn and Pyramidal Horn Comparison.

Because the directivity D_o at the off-axis angle is the same as the directivity at EOC angle of satellite. Therefore, using the equation (1) and (4), one can find the directivity vs antenna diameters for several EOC angle. Requirement of EOC directivity at 0.7 deg are 43.46 dBi for transmit, and 44.99 dBi for receive at Ka-band frequency. In the case, the optimal diameter is about 1.1 m as shown in Figure 1.

2.2 Antenna Configurations

The scan angle of Dong Bei beam is determined by the coordinates of Dong Bei beam center, S

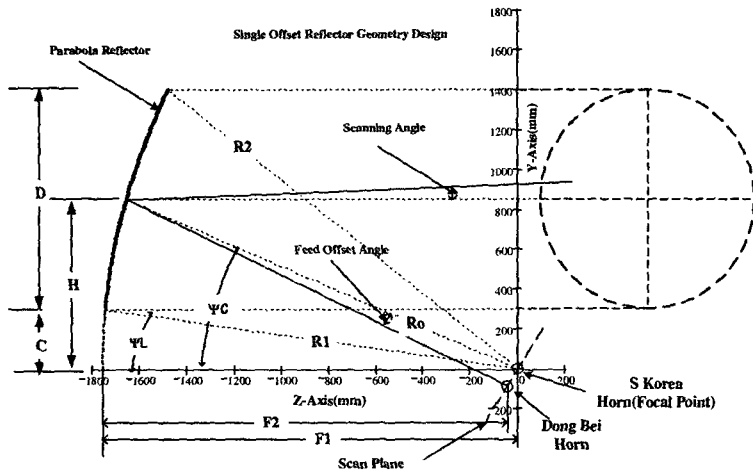


Figure 3. Antenna Configuration of S Korea and Dong Bei Beam.

Korea beam center, and satellite, which is 1.219 deg from S Korea Beam center. The horn's offset angle from the focal point of S Korea's horn is determined by the beam deviation factor (BDF) and the scan angle of Dong bei beam. As the results, the beam deviation factor (BDF) is 0.989 for F/D of 1.6 considering the cross-polarization isolation of 30 dB, and the horn's offset angle is 1.2325 deg. This result of the offset angle result in 3.99 cm, and 2.8 cm for y-axis, and x-axis, respectively at antenna coordinate.

Because the distance between the center of S Korea horn and the center of Dong Bei horn is 3.99 cm. The maximum diameter of horn including horn's thickness and spacing between two horns is less than 3.99 cm. There could be the choice for pyramidal horn and corrugated horn. It is known that the corrugated horn has more good performances than pyramidal horn. But for getting identical edge tapers which are 7 dB for Tx frequency, and 14 dB for Rx frequency, the aperture size of corrugated horn must be larger than that of pyramidal horn. The corrugated horn's thickness also is larger than pyramidal horn as shown Figure 2. Therefore, the pyramidal horn is used as the horn of reflector antenna. The final antenna design results and configuration are as shown in Figure 3. The focal length (F1) for S Korea beam and F2 for Dong Bei beam are 1760 mm and 1758.618 mm, respectively. The half edge tape angle is 16.818 degree.

2.3 Antenna Performances

The cross-polarization discrimination of horn to meet cross-polarization isolation of 30 dB in antenna system should be more than 30dB at the edge taper angle of 16.818 degree. The simulation results of horn's x-pol discrimination are 40 dB, and 45 dB for Tx and Rx, respectively. All performance results such as EOC gain, gain slope, sidelobe level, cross-polarization discrimination and isolation meet the antenna requirement as shown in Figure 4 and Figure 5.

4. CONCLUSIONS

All performances of the antenna meet the antenna requirement. But there are performance degradation EOC gain sidelobe level for Dong Bei beam due to horn offset. The scan loss of Dong Bei

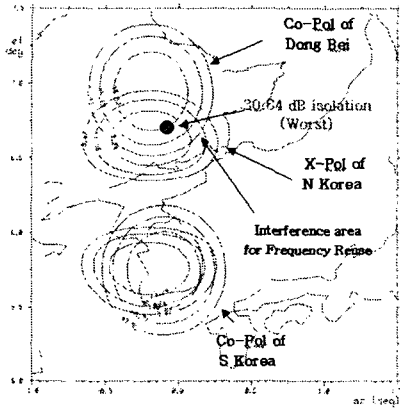


Figure 4. Rx Directivity Contour Pattern.

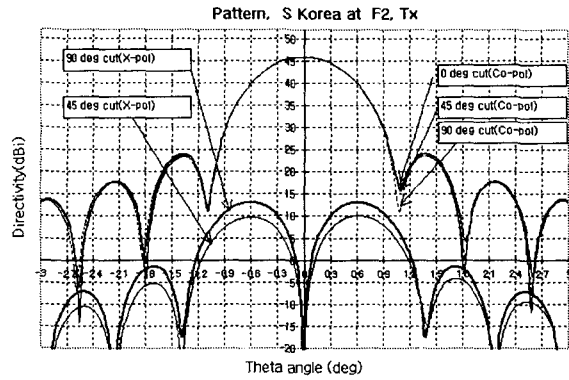


Figure 5. Tx Directivity Cut Pattern.

beam is 0.05 dB. The sidelobe isolation of Dong Bei beam is more high than S Korea beam. The calculation of pyramidal horn pattern was performed by CST tool, and the pattern simulation of the antenna system was Grasp8 S/W from TICRA company (TICRA 2000).

REFERENCES

- Milligan 1955, Modern Antenna Design (Network: McGraw-Hill), pp.179-189
 TICRA 2000, Technical Description of GRASP 8.0, S-084-02, Denmark