

UE05

### Nickel decoration on multi-walled carbon nanotubes using multi-step impregnation method

Shiin Dong Kim<sup>1</sup>, Ji Sun Im<sup>1</sup>, Ju Wan Kim<sup>1</sup>, Soo Jin Park<sup>2</sup>, and Young-Seak Lee<sup>1\*</sup>

<sup>1</sup>Department of Applied Chemistry and Biological Engineering, Chungnam National University, 220, Yuseong-Gu, Daejeon, 305-764, Korea

<sup>2</sup>Department of Chemistry, Inha University, 253, Nam-Gu, Incheon 402-751, Korea

\*Corresponding author: youngseel@enu.ac.kr; Phone: +82 42 821 7007; Fax: +82 42 822 6637

#### Introduction


Hydrogen is one of the cleanest and idealized energy sources. Hydrogen storage is widely recognized as a critical enabling technology for the successful commercialization and market acceptance of hydrogen powered vehicles. Kim and co-workers reported 6 wt% nickel nanoparticle-dispersed multi-walled carbon nanotubes (MWNs) released 2.8 wt% hydrogen amount [1].

#### Experimental

In order to decorate nickel particles on MWNs, 0.5 g of MWNs treated with acids [2] was immersed in 110 mM nickel nitrate solution of 20 ml. These solutions were sonicated for 1 h at room temperature for good dispersion. Each sonicated solution was evaporated in oil evaporator until solution was perfectly vaporized. After vaporization, vaporized powder was dried at 383 K overnight. On the other hand, 0.5 g of MWNs immersed into 22 mM nickel nitrate solution. Other procedures were same described as above. 5 times for same loading amount of nickel were repeated in series. After drying, the samples were reduced in flowing 5% He/Ar as the reducing gas, during which reduction conditions were first heated by 5 K/min up to 773 K and kept for 3 h, respectively.

#### Results and Discussion

As shown in Fig. 1(b), in case of Ni-MWNs (10-5), small nickel particles were observed in the inner wall of MWNs. This is very interesting results. On the study of hydrogen storage on carbon nanotubes, many researchers tried to use the inner space of MWNs to store hydrogen. Also, Kim and co-workers suggested that nano-sized nickel particle were more efficient to store hydrogen on MWNs [2]. This result suggests that impregnation method using low nickel concentration through several times can penetrate nickel oxides into the inner wall.

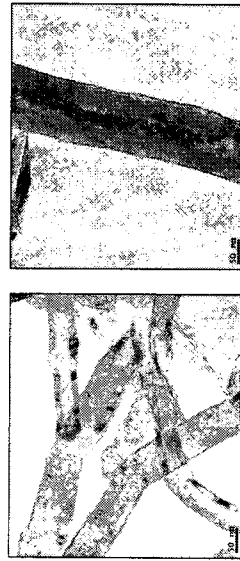

(a) (b)  
Fig. 1. TEM images decorated with nickel.

#### REFERENCES

- [1] H.S. Kim, H. Lee, K. S. Han, J.H. Kim, M.S. Song et al. : J. Phys. Chem. B **109**, 8983 (2005).  
[2] S.D. Kim, J.W. Kim, J.S. Im, Y.H. Kim and Y.S. Lee: J. Fluorine Chemistry **128**, 60 (2007).

UE06

### Self-assembly multi-layer fabrication and photochromism using diazonium resin and spiroxazine compound

Young-Min Park<sup>1</sup>, Sung-Hoon Kim<sup>2</sup>, Chang-Soo Lee<sup>3</sup> and Young-A Son<sup>1\*</sup>

<sup>1</sup>BK21, Department of Organic Materials and Textile System Engineering, Chungnam National University, Daejeon, 305-764, S. Korea

<sup>2</sup>Department of Textile System Engineering, Kyungpook National University, Daegu 702-701, S. Korea

<sup>3</sup>Department of Chemical Engineering, Chungnam National University, Daejeon, 305-764, S. Korea

\*Corresponding author: yason1@cnu.ac.kr; Phone: +82 42 821 6620; Fax: +82 42 823 3736.

Grant sponsor: the Program for the Training of Graduate Students in Regional Innovation (By MOCTE)

Recently, the fabrication of self-assembled ultrathin film has received considerable interests due to their importance for nanostructured materials with tailored structures and properties [1]. The layer-by-layer self-assembly method, initially developed with the use of a pair of oppositely charged polyelectrolytes, is a facile and a versatile technique that has recently emerged as a viable approach to prepare ultrathin films in large application areas. In this study, we described the preparation of diazonium resin and photochromic spiroxazine derivative in fabrication of multi-layers [2].

Firstly, the diazonium resin layer having positive charge was presented on the negatively charged substrate, which occurred by electrostatic forces. Secondly, the substrate having positively charged diazonium resin was dipped into the solution containing negatively charged PSS (poly(sodium-4-styrene)sulfonate). Finally, a negatively charged substrate was then dipped into positive spiroxazine derivative aqueous solution. This preparation process was repeated until the desired number of the multi-layers was achieved. The fabrication of diazonium resin, PSS and spiroxazine dye compound is schematically illustrated in Fig. 1.

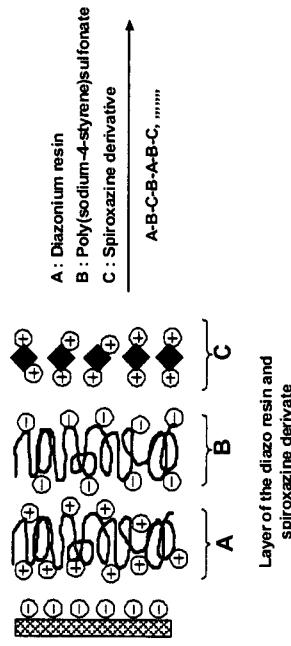


Fig. 1. Scheme of the self-assembled fabrication multi-layers.

As shown in Fig. 1, the self-assembled multi-layers caused by electrostatic forces were formed on the surface. The gradual growth of the layers formed by successive adsorption of diazonium resin and spiroxazine dye derivative was examined by UV-vis spectrophotometer.

#### REFERENCES

- [1] K. H. Ding, M. K. Ram, L. Zheng and C. Nicolini, Covalently attached multilayer assemblies of diazo-resin and binuclear cobalt phthalocyanines (Thin Solid Films, 2005), p. 310.  
[2] T. Cassier, K. Lowack and G. Decher, Layer-by-layer assembled protein/polymer hybrid films nanoconstruction via specific recognition (Supramolecular Science, 1998), p. 309.