

Numerical and experimental investigation of non-stationary processes in the supersonic gas ejector

Anton tsipenko* · Lev Kartovitskiy* · Jihyung Lee**

ABSTRACT

The supersonic gas ejector, as gas dynamic appliance, has been applied for a long time because of simplicity and reliability. However, for the prediction of ejector performances with given parameters, that is, working gas pressure and the nozzle shape, it is necessary to raise accuracy of modelling for properties of ejector gas flow.

The purpose of the represented work is to compare one-dimensional modelling and numerical results with experimental results. The ejector with a conic nozzle has been designed and tested (Mach number at the nozzle exit section was 3.31, the nozzle throat diameter - 6 mm). Working gas - nitrogen, was brought from system of gas bottles. Diameter of the mixture chamber at the nozzle exit section was limited by condensation temperature of nitrogen and equaled 20 mm. The one-dimensional theory predicted the minimal starting pressure equaled 8.18 bar (absolute) and 0.051 bar in the vacuum chamber. Accordingly the minimal starting pressure was 9.055 bar and 0.057 in the vacuum chamber bar have been fixed in experiment.

Key Words: Supersonic Gas Ejector, One Dimensional Modelling

1. Introduction

The supersonic gas ejector (vacuum pump) is a device which a long time is used as gas-dynamic appliance and which is investigated in detail.^{[1]-[5]} However, for adequate simulation of ejector performances, in particular, ejector overall characteristics and minimum level of vacuum pressure for known nozzle chamber parameters of working gas and the known nozzle shape, it is necessary to raise the simulation accuracy for gas flow of

the ejector.

For the ejector providing peak pressure ratio, there is a start problem and stationary operating regime keeping. Instability of ejector operating regime is especially appreciable near breakdown pressure level. About this level pressure ratio is maximal. However, minimal pressure decrease in the nozzle chamber near the breakdown point destroys gas flow and decreases the pressure differentiation between the nozzle exit section and the vacuum chamber instantly. Design of the ejector creating vacuum chamber minimal pressure, it is possible to present as several stages.

The preliminary sizes of gas-dynamic channel characteristic sections (the mixing

* Associate professor, Moscow Aviation Institute1

** 충남대학교 산학협력단

연락처, E-mail: levka_58@mail.ru

chamber diameter near the nozzle exit section, diffuser throat diameter, outlet diffuser diameter), ejector start pressure and nozzle operating pressure are determined by the one-dimensional theory [3]. The one-dimensional theory does not estimate the channel restriction-expansion corners and the channel linear sizes. There are recommendations of a choice for linear sizes and restriction-expansion corners based on experimental data. The channel length and restriction-expansion corners are selected, using numerical simulation of non-viscous gas flow. This simulation allows to specify section diameters of ejector. The minimal ejector length and simplicity of ejector design are solution criteria.

The computed sizes and the ejector performances are specified finally using the viscous gas model. In the article the mentioned problem is solved by software package FlowVision [6].

The represented work purposes are the analysis of one-dimensional theory capacities for ejector diameter and starting pressure definition and present experimental data of non-stationary processes in supersonic gas ejector.

2. The computational Simulation

Working regime for ejector includes two stages:

1 stage : Ejector regime. Starting ejector with ambient pressure equaled 1 bar and pumping out air from vacuum chamber.

2 stage : Wind tunnel. There is minimal pressure within vacuum chamber.

Ejector and wind tunnel have exit restriction-expansion section, so-called «the second throat». The ejector theory [3,4/

explains the second throat necessity as follows. At first pressure increases up to maximal level during motor prechamber starting process. Maximal pressure allows to obtain required Mach numbers at nozzle outlet. If pressure within motor prechamber is reduced up to some minimal value then probability of penetration for air perturbation into ejector grows. There is balance for forces which fixes shock location and gas flow structure (shock-train) in ejector diffuser for correctly designed channel (a choice of the second throat).

Gas flow begins moving from nozzle outlet to ejector outlet high pressure (relatively ambient atmosphere) at fast increase of pressure within nozzle prechamber (Figure 1). It causes general movement for gas in direction from ejector. Therefore, for more ejector light-load start, the second throat should be maximal, but without flow separation (without inverse flow zones). Most simply to consider the constant diameter ejector (tube) in this case.

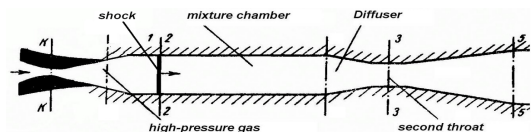


Fig. 1. Ejector core elements and start shock

After ejector starting the channel pressure goes down and penetration probability for air into ejector grows. It causes increasing of pressure in ejector. To exclude the phenomenon of growth for pressure in ejector, it is necessary to narrow the channel till minimally allowable size. Therefore 2nd throat ejector appears as an element of design. At minimal size of the 2nd throat the ejector will provide minimal pressure in vacuum chamber

if pressure within nozzle prechamber will be minimally allowable, and its level will be less, than starting pressure. This phenomenon is ejector pressure hysteresis. The hysteresis takes place for ejector system at pressure decrease in nozzle prechamber. This phenomenon should be used for resources economy to provide vacuum chamber minimal level.

The ejector with a conic nozzle has been designed and tested. Working gas - nitrogen, was brought from gas bottles system. Temperature $T_0=300\text{ K}$. The following channel parameters are received: the nozzle throat diameter 6 mm nozzle outlet Mach number 3.31, ejector mixture chamber diameter at the nozzle exit section was limited by condensation temperature of nitrogen and equaled 20 mm minimal second throat is 16.4 mm; minimal starting pressure is 8.14 bar; average ejector inlet Mach number 4.035 (near nozzle outlet) average pressure about the nozzle exit section is 0.063 bar. Average temperature of flow at the nozzle exit section is 70.5 K. (Condensation temperature for nitrogen is $T=72\text{ K}$. This temperature corresponds to a point with pressure $p=0.51\text{ bar}$ on a nitrogen saturation curve. Therefore condensation is minimal.)

The one-dimensional theory predicted the minimal starting pressure 8.18 bar (absolute) and 0.051 bar in the vacuum chamber.

Ejector is considered as classical ejector. Optimal ejector operating regime is achieved [3], if the compression shock is close on its parameters to intensive shock after 2nd throat and is located in expanding diffuser. In this case it is possible to use experimental recommendations of various authors concerning a diffuser expansion corner. The expansion corner of diffuser wall should not exceed 60. We shall use diffuser having two

sections with corners 10 and 2.50. All linear dimensions for ejector are determined by 2D non-viscous gas model and are confirmed by viscous gas one (Figure 2).

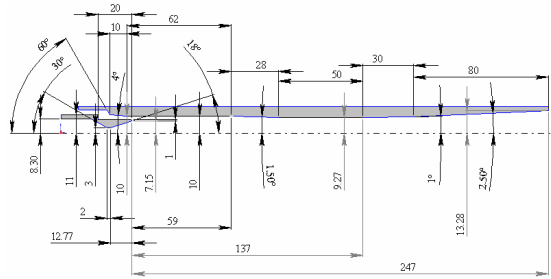


Fig. 2. Designed Ejector

Ejector flow from start to stop was simulated by FlowVision at stepless increase of pressure and constant temperature in the nozzle prechamber. Numerical simulations have shown: designing result is channel with regular system of oblique shocks. The ejector provides pressure in vacuum chamber $<0.07\text{ bar}$ at pressure 11 bar in nozzle prechamber. Two various turbulence models ($k-\epsilon$ and Spalart-Allmaras) have shown: separation point location varies, but parameters of a flow at nozzle exit section and pressure in the vacuum chamber do not change. When we use $k-\epsilon$ model the separation point is oscillate (extreme positions are shown on Figure 3, oscillation period is 0.0096 s). When we use Spalart-Allmaras model the separation point is stationary, are shown on the down picture of Figure 3.

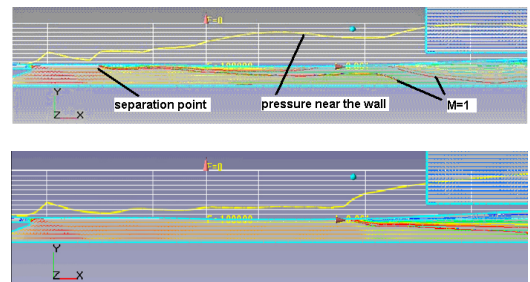


Fig. 3. Numerical Simulation

3. Experiments

Pressure sensors were located as shown on Figure.4. Sensor numerical order corresponds to alphabetical order.

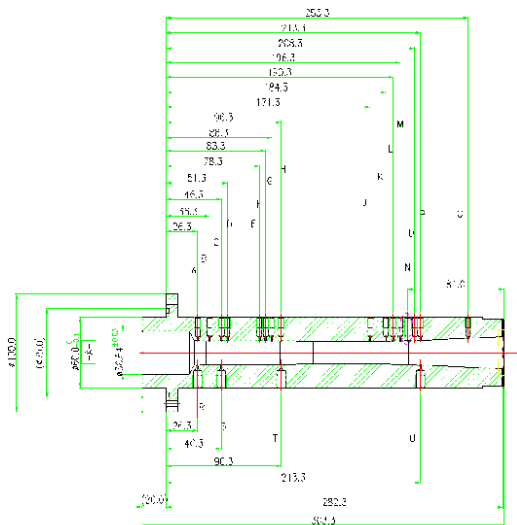


Fig. 4. Experimental channel with sensor locations

The minimal starting pressure was 9.055 bar (maximum 9.5 bar for another tests) and underpressure 0.057 in the vacuum chamber bar have been fixed in experiment. Vacuum chamber pressure against total (stagnation) pressure are shown on fig.5 for some tests. Comparison predicted and experimental data has shown, that the one-dimensional theory allows to estimate the low boundary of starting pressure.

The main experimental oscillation periods was obtained from pressure sensor data (example, see fig.6). The low-frequency oscillations period change from 0.41s to 1.66s. The amplitude is changed very appreciably. The amplitude variation is corresponded to numerical data, but frequency is not.

Experiments also have shown, that the ejector noise minimum level corresponds to

optimum working pressure in the nozzle chamber.

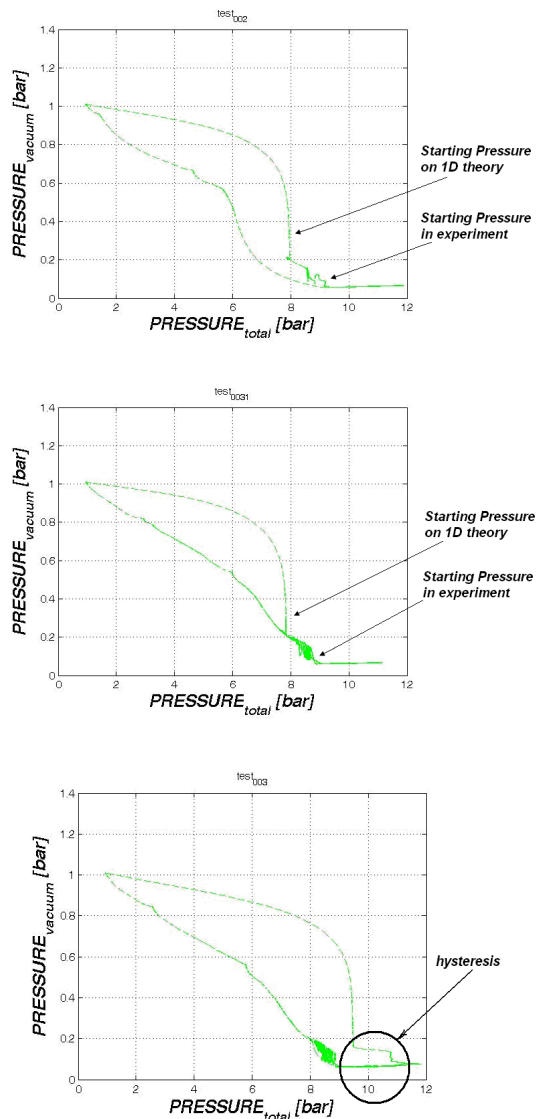


Fig. 5. Vacuum pressure and total pressure

5. Conclusions

The designed channel provides predicted pressure in vacuum chamber at more high starting pressure, than starting pressure

received on 1D theory, but smaller, than at 2D numerical experiment.

Optimum pressure in nozzle prechamber corresponds to low-noise ejector operating regime, thus, noise level can be as criterion of search for optimal regime (minimal pressure in vacuum chamber).

Numerical simulations have shown, thatejector starting pressure can be both more, and less than an experimental level of pressure, depending on a calculation grid, model of turbulence and evolution of calculation process.

2D (and 3D) numerical simulation allows to estimate a probable pressure fluctuation level for the ejector on transitive operating regimes, and also to specify prospective distribution for flow parameters, in particular, gas flow temperature along a wall of the channel. Also 2D (and 3D) numerical simulation allows to specify the additional information about gas flow, providing more adequate gas-dynamic and thermal designing.

The cause of large frequency difference between experiment and simulation is inadequacy of the turbulence model evidently. Selection or generation appropriate turbulence model for good determination of separation point (and it oscillation) - subsequent interesting research issue.

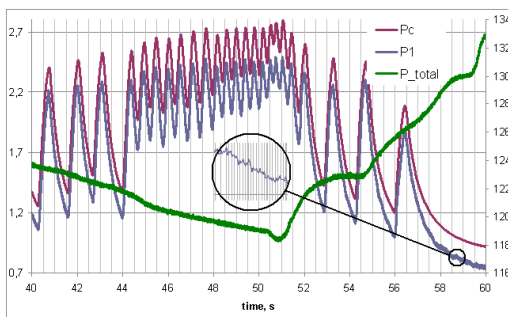


Fig. 6. unstable regime of pressures

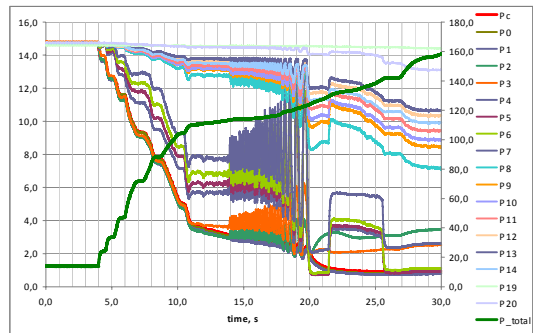


Fig. 7. Pressures along ejector wall

References

1. Dr. Rudolf Hermann "Supersonic inlet diffusers and introduction to internal aerodynamics", 1960
2. Tseytlin A.B. Steam-jet vacuum ejectors. Moscow-Leningrad, Energy press, 1965.
3. G.N.Abramovich "Applied Gas Dynamics", Moscow, "Nauka", Fifth edition, v.1, 1991, ISBN 5-02-014015-5
4. Krasnov N.F. "Fundamental Applied aerogasdynamics", M."High school".1991.ISBN 5-06-000729-4
5. Arkadov Yu.K. New gas ejectors and ejection processes. Moscow, Physico-mathematical press, 2001.
6. Application package FlowVision. /www.thesis.com.ru/software/flowvision/