Coda 파를 이용한 경상분지에서의 Q 값 추정

Q Estimates Using the Coda Waves in the Kyeongsang Basin

이 원 상*   이 기 화**

Lee, Won Sang   Lee, Kie Hwa

국문요약

이 연구에서는 단일 산란이론을 이용하여 경상분지에서 얻어진 국소 미소지진의 자료를 1.5~18 Hz 사이의 주파수 영역에서 몇 개의 구간으로 나누어 대역 통과 필터링을 하여 coda 파의 진폭 감쇠로부터 Q 값을 결정하였다. Coda Q 값은 $Q_c = Q_0 f^n$ 형태의 주파수 의존 양상을 보여주며 Q_0 값은 83.9~155.9, n 값은 0.76 에서 1.05 사이로 나타났다. 산란 감쇠와 고유 감쇠를 고려하여 감쇠가 순전히 산란에 의해서만 일어난다고 가정을 했을 때, 최소 평균 자유경로는 51~56km 이고 비탄성 감쇠계수는 0.0093~0.0098 로 나타났다. 진앙과 관측소간의 경로가 단층 지역을 지나는 것이 다른 경로를 지나오는 것보다 높은 감쇠와 강한 주파수 의존성을 보여준다.

주요어 : Coda Q, 단일 산란 이론, 산란 감쇠, 고유 감쇠, 최소 평균 자유경로, 비탄성 감쇠 계수

ABSTRACT

In this study, coda Q has been determined by the single scattering model in the Kyeongsang Basin region using the decay of the amplitudes of coda waves on bandpass-filtered seismograms of local microearthquakes in the frequency range 1.5~18 Hz. Reported frequency dependence of Q is of the form $Q_c = Q_0 f^n$ ($83.9 < Q_0 < 155.9$, $0.76 < n < 1.05$). Considering a model incorporating both scattering and intrinsic attenuation, and assuming that the attenuation is entirely due to the scattering loss, the minimum mean free paths are about 51~56 km and the coefficients of inelastic attenuation(γ) are between 0.0093 and 0.0098 were found. Earthquake-station paths pass through the fault zone show high attenuation and strong frequency dependency compared to other ones.

Key words : Coda Q, single scattering model, scattering attenuation, intrinsic attenuation, minimum mean free path, coefficient of anelastic attenuation

1. Introduction

The retrieval of earthquake source parameters and the assessment of seismic hazards in a region require the knowledge of fundamental properties of the medium, such as attenuation and velocity.

Attenuation of seismic waves is customarily described by the parameter Q called the quality factor.[1] Q is a dimensionless quantity that expresses the wave amplitude decay. The parameter Q can not be attributed to geometrical spreading. It is a combination of intrinsic scattering, and other forms of energy decay due to randomly distributed inhomogeneities in the transmitting medium.

It is difficult to measure attenuation from short-period seismic waves (1 to 30 Hz) using a deterministic approach because of the large number of parameters required to adequately explain a high-frequency seismogram. Thus,

---

* Graduate Student, Dept. of Geological Sciences, Seoul National University
** Member · Professor, Dept. of Geological Sciences, Seoul National University
본 논문에 대한 토의를 6월 30일까지 학회로 보내 주시면 그 결과를 게재하겠습니다.

Aki[2] initiated the application of a statistical approach to the attenuation of high-frequency seismic waves. He showed that the coda waves of local earthquakes could be separated to provide information about the source and the path effects, and applied it to get estimates of Q. Coda waves comprise of the part of seismograms after all the direct waves such as P, S, and surface waves.

The coda wave model of Aki[2], extended by Aki and Chouet[3], has been widely used since 1978, because of its simplicity and ease of application, to get estimates of regional Q.[4],[5],[6] The subject of this study is to estimate seismic coda Q values and its dependence on the frequency range from 1.5 to 18 Hz in the Kyeongsang Basin, using the S to S single-backscattering model of Aki and Chouet.[3] A large Cretaceous basin, the Kyeongsang Basin, developed in southeastern Korea in which the non-marine sediments, volcaniclastic and volcanic rocks of the Kyeongsang Supergroup were deposited. The Bulgugsa Granite Series were intruded in the southern part of the peninsula, mostly in the Kyeongsang Basin, in late Cretaceous times.

Since May 1994, the seismicity of the region has been monitored using short period seismographs by the Korea Institute of Geology, Mining & Materials(KIGAM). The data set consists of 22 microearthquakes, magnitudes ranging from 2.0 to 4.3, during December 29, 1996 and May 14, 1998, selected on the basis of spatial distribution and good signal-to-noise ratio. A sampling frequency is 100 Hz.

The earthquake epicenters and stations are plotted in Fig. 1, Table 1 is a listing of the location parameters for these events.
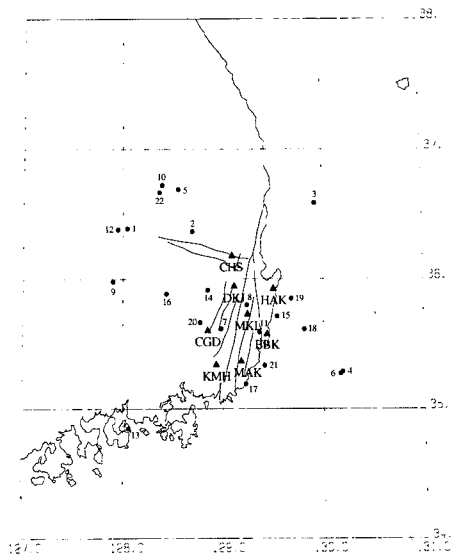

Fig. 1 Study area in the Kyeongsang Basin. Triangles represent seismograph stations, and solid circles represent earthquakes used in this study

2. Data analysis

Attempts to explain the generation of coda waves have been made in terms of various models involving the scattering of primary waves. These can be grouped into single or weak scattering models[2],[3],[7], multiple scattering models[8],[9],[10], and very strong scattering or diffusion models.[3],[8]

Single-scattering models assume that the scattered wavefield is weak and does not generate secondary scattering on encountering another scatterer.[11] Also, the Born approximation which neglects the energy lost from the direct wave during the scattering process is often invoked.

The single-backscattering model of Aki and Chouet[3] is considered coda waves as being composed of the superposition of backscattered body waves from numerous randomly distributed heterogeneities in the earth's crust and

Table 1 Earthquake hypocenters, depths, magnitudes, and number of data

Event #	Date	Time	Latitude (°N)	Longitude (°E)	Depth (km)	Local Magnitude	# of Data
1	96/12/29	01:55:03.82	36.39	128.04	4.45	2.8	2
2	97/01/08	13:06:22.31	36.37	128.69	12.46	2.6	1
3	97/03/17	11:11:48.23	36.59	129.92	4.78	3.0	1
4	97/03/26	04:38:08.62	35.29	130.19	17.73	2.6	2
5	97/05/19	08:29:06.73	36.69	128.55	12.19	2.4	1
6	97/06/04	01:48:05.29	35.28	130.17	14.75	2.5	2
7	97/06/16	22:51:13.96	35.61	128.98	1.42	2.9	3
8	97/06/26	03:50:23.19	35.80	129.24	14.66	4.3	1
9	97/06/30	23:48:47.48	35.98	127.90	10.55	2.8	4
10	97/08/05	12:45:53.29	36.72	128.39	4.49	3.3	6
11	97/09/17	09:33:18.46	35.59	129.36	10.69	3.1	4
12	97/09/26	21:16:37.27	36.38	127.95	2.14	2.6	1
13	97/10/02	23:47:16.94	34.85	128.06	6.09	2.8	4
14	97/10/11	19:50:28.76	35.92	128.84	10.93	2.7	7
15	97/12/04	14:02:52.71	35.72	129.54	10.00	2.0	1
16	98/01/13	10:08:03.28	35.89	128.43	14.96	2.8	3
17	98/01/20	02:06:09.59	35.19	129.22	4.05	2.5	2
18	98/04/11	16:21:13.08	35.62	129.81	23.22	2.6	2
19	98/04/15	07:28:28.82	35.85	129.68	15.53	2.8	4
20	98/04/24	04:39:55.79	35.67	128.77	14.60	2.4	2
21	98/04/29	01:23:04.87	35.34	129.41	14.67	2.2	1
22	98/05/14	14:23:10.05	36.67	128.36	7.88	2.6	1

upper mantle. The model assumes that the earthquake and the seismic station are located at the same point in an unbounded, homogeneous, and isotropic medium containing a random but uniform spatial distribution of heterogeneities. Aki and Chouet[3] showed that the time dependence of coda wave amplitudes, $A(\omega \mid t)$, on a narrow bandpass filtered seismogram can be written as

$$A(\omega \mid t) = C(\omega) t^{-a} \exp(-\omega t/2Q_c) \qquad (1)$$

where $\omega = 2\pi f$ is the angular frequency, $C(\omega)$ is the coda source factor, a is a constant that depends on geometrical spreading and takes values of 1 and 0.5 for body wave and surface wave scattering, respectively, Q_c is coda quality factor, and t is lapse time,

that is, the time measured from the origin time of the earthquake. In this study, $a=1$ is assumed.

Equating natural logarithms of both sides gives

$$\ln[A(\omega \mid t) \cdot t] = \ln[C(\omega)] - \omega t/2Q_c \qquad (2)$$

Thus, left side is a linear function of t with slope equal to $(-\omega/2Q_c)$.

To process the data, an automated moving window computer code was developed to work interactively with the Seismic Analysis Code(SAC) created by Joe Tull at LLNL.[12]

Experience indicates that if (t_s-t_0) is the time between the S wave arrival time(t_s) and the origin time(t_0), then often after $2(t_s-t_0)$ and always after $3(t_s-t_0)$, the general form of the

coda is established.[13] Kvamme and Havskov[14] suggested that 30 sec time window is the best length of the time window. Thus in order to obtain the most stable results with a maximum number of observations, a fixed time window of 30 sec is chosen for most of the analysis. And start time of the coda window is selected at times equal to triple the S wave travel time from origin.

To aid in the interpretation of an effect of the fault zone on the value of Q_c, data were sorted out 3 groups as follows.

Group I : Earthquake-Station paths don't pass through the fault zone(Inland)

Group II : Earthquake-Station paths pass through the fault zone

Group III : The same as Group I, but epicenter located in the coast and/or the sea

3. Results

A total of 385 Q_c measurements covering 55 different paths were made. Q_c values were determined using all events, but because of variable noise conditions, not all combinations of event/station/frequency band could be used.

Fig. 2 is a plot of all Q_c measurements versus frequency for each group and shows that there is a definite frequency dependence of Q_c in the study area. The results for data from each group are summarized in Table 2 and Table 3. In all regions where coda Q measurements have been carried out, a positive correlation between Q_c and frequency of the form

$$Q_c = Q_0 \, f^n \qquad (3)$$

has been noted.

In the context of the single-scattering theory, coda Q_c is an effective Q since the energy scattered away from the primary field is lost unless it is scattered towards the seismometer.[15] Thus Q_c is a combination of both intrinsic attenuation, Q_i, and attenuation due to scattering, Q_s. From observations in various areas of a strong frequency dependence of Q_c, the value of Q_c at 1 Hz, and the intensity of current tectonic activity, Aki[15] concluded that scattering was the dominant contributor to the frequency dependence of Q_c. When scattering dominates over intrinsic friction, estimates of apparent Q made from backscattered coda vary with frequency.[16]

Dainty[17] proposed that the observed Q_c can be expressed as

$$\frac{1}{Q_c(f)} = \frac{1}{Q_i} + \frac{1}{Q_s} = \frac{1}{Q_i} + \frac{v}{2\pi f L} \qquad (4)$$
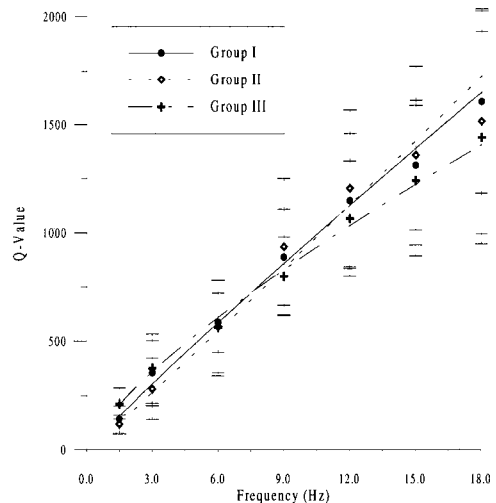

Fig. 2 Summary of results for coda Q values with frequencies. Each 3 curve indicates the best fitting by linear regression. Numerical results are summarized in Table 2 and Table 3.

where v is velocity and L is the mean free path. The mean free path is a parameter that controls the energy transferred from the

primary to the scattered waves throughout the traveled path. The scatterers reduce the mean energy flux density of the incident plane wave by $exp(-x/L)$, where x is the distance along the propagation direction. The mean free path gives an idea of the distribution of scatterers in the earth thus providing useful information on the tectonic characteristic of the region.

However, assuming that scattering is the dominant contributor to attenuation in this study area, that is $Q_i \to \infty$, the minimum mean free path, $L_{min}=vQ_c/2\pi f$ can be estimated using Dainty's[17] model. Values of L_{min}, calculated from the mean values of Q_c and with an S wave velocity of 3.5 km/sec[18], are shown in Table 2. The L_{min} are almost frequency dependent.

In Table 2, we have also listed the corresponding values of the coefficients of anelastic attenuation, γ. The relationship between γ and Q is $\gamma = \pi f/QU$[19], where f is the frequency and U is the group velocity. For the calcu-

lation in Table 2, we have also used a value of U equal to the S wave velocity (3.5 km/sec).

Table 3 Coefficients for $Q=Q_0 f^n$ and their statistical values

	Q_0	n	$\sigma(Q_0)$	$\sigma(n)$	r^*
Group I	107.9550	0.9439	1.0918	0.0415	0.9952
Group II	83.8509	1.0466	1.1000	0.0451	0.9954
Group III	155.8770	0.7615	1.0474	0.0219	0.9979

* Correlation Coefficient

4. Discussion

Measurements of the coda Q in the Kyeongsang Basin for 3 groups with the frequency range from 1.5 Hz to 18 Hz show a strong frequency dependence. Assuming that the attenuation is entirely due to the scattering loss, an almost constant minimum mean free path of about 54 km, 51 km, 56 km for Group I, Group II, Group III is found respectively.

Group II has relatively the low Q_c value (high attenuation) at 1 Hz, and strong frequency

Table 2 Mean values of attenuation

Frequency (Hz)	Group I			Group II			Group III		
	Q	L_{min} (km)	γ (km^{-1})	Q	L_{min} (km)	γ (km^{-1})	Q	L_{min} (km)	γ (km^{-1})
1.5	140.399 ±46%	52.25	0.0096	116.360 ±39%	43.21	0.0116	214.428 ±34%	79.63	0.0063
3	354.624 ±42%	65.85	0.0076	280.439 ±50%	52.07	0.0096	375.601 ±42%	69.74	0.0072
6	585.719 ±25%	54.38	0.0092	212.548 ±37%	52.68	0.0095	562.112 ±39%	52.19	0.0096
9	887.571 ±25%	54.94	0.0091	314.815 ±34%	57.94	0.0086	798.747 ±23%	49.44	0.0101
12	1147.72 ±27%	53.28	0.0094	1206.47 ±30%	56.00	0.0089	1066.26 ±25%	49.50	0.0101
15	1312.88 ±23%	48.76	0.0103	1360.48 ±31%	50.52	0.0098	1242.15 ±28%	46.13	0.0108
18	1606.51 ±26%	49.72	0.0101	1517.14 ±34%	46.95	0.0106	1442.03 ±34%	44.63	0.0112
Average		54.17 ±5.22	0.0093 ±0.0008		51.34 ±4.69	0.0098 ±0.0009		55.89 ±12.38	0.0093 ±0.0017

dependency (n≈1.05) to other ones. In general, this results agree with the phenomena that tectonically stable regions such as the central United States exhibit almost no frequency dependence, while active areas in which processes such as folding, faulting, and sub-duction show significant frequency dependence of Q_c, and the low Q_0. There are however, some reservations as to the validity of these correlations; for example, the coda Q measure-ments in New England[15], which is a nontectonic region, show a very strong frequency depen-dence at lapse times less than 100 sec. If we assume that the above correlation is valid, then the Kyeongsang Basin region seems to be highly heterogeneous (at Group I, Group II).

In this study we get the Q_0 value in 83.9~108.0 range. These values of Q_0 appear higher than those obtained by other authors in the same region. Jun et. al.[20] found a value Q_0=38.4609 by a different method (Sato's method[7]). Baag[21] estimated Q_0=42.4151 with the 20 sec window length. The increase in coda Q as a function of window length is thought to reflect an increase of Q with depth, because coda waves for a longer time window will sample deeper parts of the crust.

5. Conclusions

Using the single-scattering method, detailed attenuation parameters for the Kyeongsang Basin was obtained. The major findings of this study are as follows:

1. Absorption structure of the Kyeongsang Basin appears highly heterogeneous.
2. A frequency dependence of coda Q in the form of $Q_c=Q_0f^n$ is observed in the range of frequencies. The value of n is not constant throughout the study area.
3. Group II (earthquake-station paths pass through the fault zone) have a relatively low Q_0 (≈83.9) value to other ones and strong frequency dependence (n≈1.05). Aki[15] noted that the structural boundaries and faults can more effectively scatter waves propa-gating perpendicular to their planes.
4. L_{min} values are 51~56 km, and the values of the coefficient of anelastic attenuation γ are 0.0093~0.0098 km^{-1}.

Acknowledgement

References

1. Knopoff, L., "Q," Rev. Geophys, Vol. 2, 1964, pp. 625-660.
2. Aki, K., "Analysis of the seismic coda of local earthquakes as scattered waves," J. Geophys. Res., Vol. 74, 1969, pp. 615-631.
3. Aki, K. and Chouet B., "Origin of coda waves: source, attenuation, and scattering effects," J. Geophys. Res., Vol. 80, 1975, pp. 3322-3342.
4. Roecker, S. W., Tucker, B., King, J., and Hatzfeld, D., "Estimates of Q in central Asia as a function of frequency and depth using the coda of locally recorded earthquakes," Bull. Seism. Soc. Am., Vol. 72, 1982, pp. 129-149.
5. Rhea, S., "Q determined from local earth-

quakes in the South Carolina coastal plain," *Bull. Seism. Soc. Am.*, Vol. 73, 1984, pp. 2257-2268.

6. Van Eck, T., "Attenuation of coda waves in the Dead Sea region," *Bull. Seism. Soc. Am.*, Vol. 78, 1988, pp. 770-779.

7. Sato, H., "Single isotropic scattering model including wave conversions. Simple theoretical model of the short-period body wave propagation," *J. Phys. Earth*, Vol. 25, 1977, pp. 163-176.

8. Kopnichev, Y. F., "The role of multiple scattering in the formation of a seismogram's tail," *Izv. Akad. Nauk SSSR, Fiz. Zemli*, Vol. 13, 1977, pp. 394-398 (in Russian).

9. Gao, L. S., Biswas, N. N., Lee, L. C., and Aki, K., "Effects of multiple scattering on coda waves in three-dimensional medium," *Pure Appl. Geophys.*, Vol. 121, 1983a, pp. 3-15.

10. Gao, L. S., Lee, L. C., Biswas, N. N., and Aki, K., "Comparison of the effects between single and multiple scattering on coda waves for local earthquakes," *Bull. Seism. Soc. Am.*, Vol. 73, 1983b, pp. 377-389.

11. Pulli, J. J., "Attenuation of coda waves in New England," *Bull. Seism. Soc. Am.*, Vol. 74, 1984, pp. 1149-1166.

12. Steck, L. K., Prothero, W. A., and Scheimer, J., "Site-dependent Coda Q at mono craters, California," *Bull. Seism. Soc. Am.*,

Vol. 79, 1989, pp. 1559-1574.

13. Rautian, T. G. and Khalturin, V. I., "The use of the coda for determination of the earthquake source spectrum," *Bull. Seism. Soc. Am.*, Vol. 68, 1978, pp. 923-943.

14. Kvamme, L. B. and Havskov, J., "Q in Southern Norway," *Bull. Seism. Soc. Am.*, Vol. 79, 1989, pp. 1575-1588.

15. Aki, K., "Scattering and attenuation of shear waves in the lithosphere," *J. Geophys. Res.*, Vol. 85, 1980, pp. 6496-6504.

16. Richards, P. G. and Menke, W., "The apparent attenuation of a scattering medium," *Bull. Seism. Soc. Am.*, Vol. 73, 1983, pp. 1005-1022.

17. Dainty, A., "A scattering model to explain seismic Q observations in the lithosphere between 1 and 30 Hz," *Geophys. Res. Letters*, Vol. 11, 1981, pp. 1126-1128.

18. Lee, K., "On crustal structure of the Korean peninsula," *The Journal of the Geological Society of Korea*, Vol. 15, 1979, pp. 253-258.

19. Nuttli, O. W., "Seismic wave attenuation and magnitude relations for eastern North-America," *J. Geophys. Res.*, Vol. 78, 1973, pp. 876-885.

20. Jun, M. S., Chi, H. C., Jeon, J. S., and Shin, I. C., "Seismological study," *KIGAM Research Report*, No. KR-94(C)1-16, KIGAM, Korean, 1994.

21. Baag, C. E., "Seismic Wave Attenuation in the Korean Peninsula," *KAERI Research Report*, No. 96-08, KAERI, Korean, 1997, 44 pp.