

# A Study on the Radiated Emission from the DC Power-Bus for the PCB

## PCB DC Power-Bus로부터의 전파 방사에 관한 연구

Sungtek Kahng

강 승 택

### Abstract

The DC power-bus' resonance is frequently attributed to EMI sources in the PCBs. Subsequently, it will ruin the digital signal integrity within one system or between adjacent systems in the form of conducted or radiated emission. Hence, since it is of importance to examine the PCB's emission, this paper sheds a light on the radiated emission from the power-bus with regards to its resonance modes. A full-wave analysis method is used to calculate the impedance and radiated electric fields and is validated by physics and an EM analysis tool.

### 요 약

PCB에서의 전자파 간섭원으로 DC power-bus의 공진이 자주 지목된다. 이것은 결국, 전도성 또는 전파 방사의 형태로, 하나 또는 인접한 시스템에서 디지털 SI를 저하시키게 된다. 따라서 PCB의 방사 문제를 파악하는 것은 중요하므로, 본 논문은 DC power-bus 공진 모드에 대한 방사를 면밀히 살펴본다. 엄밀한 주파수 영역 해석법을 이용하여 임피던스와 방사 전계를 구하고, 이는 물리와 전자파 해석 모의시험에 의해 타당성이 검토된다.

Key words : Radiated Fields, PCB Power-Bus, Full-Wave Analysis

### I. Introduction

The PCBs in a communication system are usually stacked on top of each other for accommodating routes of signal traces, vias, connectors, semiconductor chips and so on. Since the population of the components on each PCB layer is getting more complicated and the space between the layers becomes smaller, it is more likely for the structure to generate EMI noises with increasing clock speed. Especially, cavities like the DC power-bus incur the resonance phenomena over a broader range of spectrum and they end up with non-compliance in radiated as well as conducted emission concerns<sup>[1]~[7]</sup>.

As stated earlier, the DC power-bus acts like a cavity that is composed of the top and bottom planes as the PEC boundary condition and the PMC walls<sup>[5]~[7]</sup>. Along with these boundary conditions, the resonance properties are determined by the feeding point as the source of excitation, the loading element and the size of the DC power-bus. The electromagnetic fields go highest at each resonance mode, and they propagate past the edges of the planes to the external region. This is radiated emission(RE). The radiated energy from one cavity reaches its upper and lower PCB layers and nearby systems.

In this paper, a full-wave analysis method in Ref.'s [5]~[7] is adopted to perform the exact calculation of

「본 연구는 산업자원부, 한국산업기술평가원 지정 인천대학교 멀티미디어연구센터의 지원에 의한 것입니다.」

인천대학교 정보통신공학과(Dept. of Information and Telecommunication Eng., University of Incheon)

· 논문 번호 : 20051105-10S

· 수정완료일자 : 2006년 1월 16일

the impedance profile and give the resonance modes' radiated electric field from the DC power-bus. In particular, the present analysis method is validated by a reliable EM tool for the impedance computation.

## II. Theory

Lately, the PCB level EMC problems have had much attention, because they have much to do with other levels of EMC concerns bridging the gap between ICs, modules, and systems. Another reason is that a variety of potential noise sources are formed by way of the PCB. One good example regarding this is the stacked planes. The stacking of planes causes energy reactance and resonating properties in between. At the maxima of the energy as the resonance modes, fields propagate and noise currents conduct along the paths out of control. This resonating structure can be illustrated as in Fig. 1.

The top as the ground and the bottom as the power-plane are identical in size with  $W_x$  by  $W_y$  by  $W_z$ . The DC current is carried along the feeding probe situated at  $(X_0, Y_0)$ . And it is used as port 1. Port 2 is any arbitrary observation point at  $(X, Y)$  where induced voltage is observed. The filling region between the two planes is the dielectric substrate and 4.2 and 0.02 are given as its relative dielectric constant and loss tangent, respectively. Referring to the structure's boundary conditions again, the two planes are the PEC and the walls are the PMC. Then, electromagnetic field( $E_z$ ) is expressed as in Ref. [5]~[7] and can be easily interpreted as the voltage-to-current ratio or as the impedance. The expression is guessed to show resonance

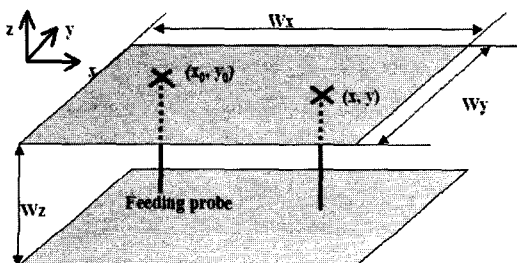


Fig. 1. DC power bus modelled as a cavity.

phenomena when its denominator becomes zero. These resonance frequencies are decided dependent upon the physical size, the filling substance and the boundary conditions.

The field  $E_z$  is formed inside the cavity and it goes out of the structure into the outer region. The radiation can be explained as the magnetic current due to  $E_z$  is induced on the walls first, and then this fictitious current radiates. For this, the radiation integral in the following is employed<sup>[8]</sup>.

$$\underline{E} = (jk_0 W_z e^{jk_0 r'} / (4\pi r)) \int \underline{M}_s(\underline{r}') \cdot e^{jk_0 \underline{r} \cdot \underline{r}'} \cdot \underline{e}_r \cdot (\underline{e}_r \times \underline{e}_t) dl \quad (1)$$

$M_s(\underline{r}')$  is the induced magnetic current at  $\underline{r}'$  on the walls, and  $\underline{e}_r$  and  $\underline{e}_t$  are the normalized position vectors of the observation and source points.  $k_0$  is the free-space wavenumber and  $j = \sqrt{-1}$ . Given that  $W_z$  is far less than  $W_x$  or  $W_y$  equation (1) takes line integral along the periphery instead of the surface integral. Also, the above equation considers the far-zone for simplicity.

## III. Numerical Results

First, the impedance profile is obtained through the exact full-wave calculation with respect to the power-bus of 225 mm by 150 mm by 1.5 mm. For this simulation, no loading of local components is considered. And the DC current is fed at  $(X_0=0, Y_0=0)$  from bottom to top. The frequency range of interest occupies from 0 through 1 GHz. With the input parameters for the calculation, a commercial EM analysis tool(FDTD based) is used to validate the present technique.

Fig. 2 shows good agreement between the two methods. Both simulation cases depict the resonance behaviors of the DC power-bus. Beyond 200 MHz, seven peaks correspond to (1, 0), (0, 1), (1, 1), (2, 0), (2, 1), (3, 0) and (0, 2) in order. Next,  $E_z$  in the DC power-bus is plotted for the frequencies around two resonance modes (1, 0) and (3, 0).

In Fig. 3,  $E_z$  varies over the planes with the numbers of nulls equivalent to resonance modes. And now the calculated radiated field is visualized at  $\phi=0^\circ$  and  $90^\circ$



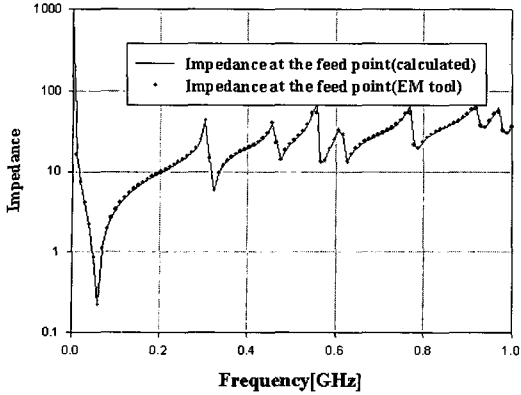


Fig. 2. Input impedance profile of the DC power bus without loading(calculated and compared to other method).

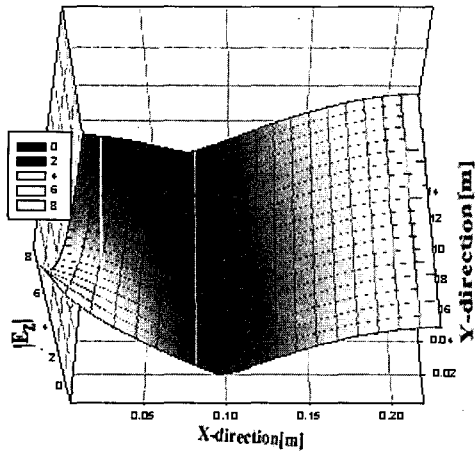


(a) 360 MHz

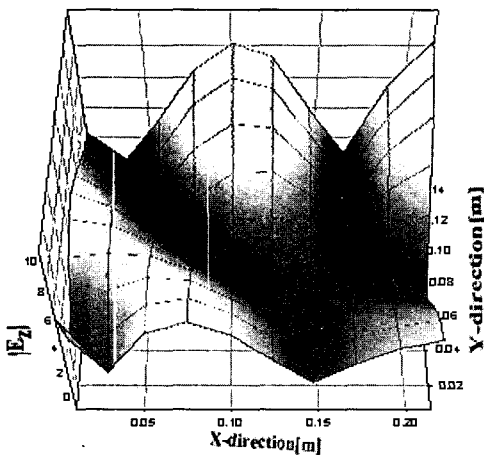


(b) 750 MHz

Fig. 3.  $E_z$  over the DC power bus.

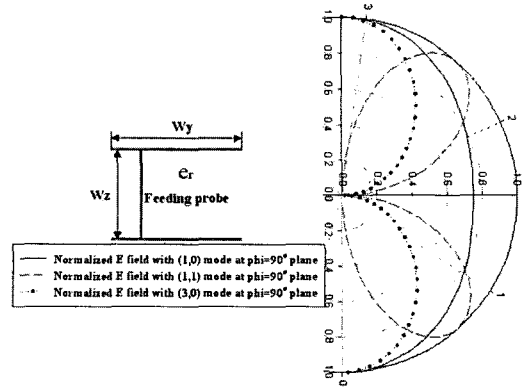

(a) Radiated field at  $\phi=0^\circ$  plane

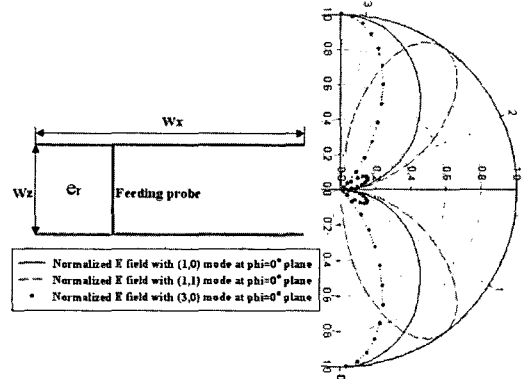

(b) Radiated field at  $\phi=90^\circ$  plane

Fig. 4. Radiated field patterns at  $\phi=0^\circ$  and  $90^\circ$  planes.

planes with varying theta.

Each plane's observation deals with three different resonance modes (1, 0), (1, 1) and (3, 0). All the field patterns are normalized since they are alike in magnitude. In the  $\phi=0^\circ$  plane, (3, 0) mode is the weakest of all. (1, 1) mode tilts the radiation angle different from the other cases. As for the  $\phi=90^\circ$  plane's observation, (3, 0) mode generates tiny tilted beams and (1, 1) mode's beam is still inclined. Combining the two  $\phi$ - planes, (1, 1) and (3, 0) modes radiate mostly vertically and do not emit much of energy in the horizontal direction. However (1, 0)-mode causes the horizontal and vertical directed radiation, which is thought to be a significant EMI noise to nearby objects.


#### IV. Conclusion

To diagnose the damaging radiated emission from the DC power-bus, its field and impedance as well as resonance properties are exactly calculated. In particular, a full-wave analysis method is used to calculate the impedance and radiated electric fields and is validated by physics and an EM analysis tool. Through the radiation integral of the induced magnetic current on the walls of the DC power-bus, the radiated field pattern is also computed. It is noteworthy that the dominant (1,0) resonance mode energy reaches any adjacent objects from the edges of the structure.

### References

- [1] S. Van den Berghe et al., "Study of the ground bounce caused by power plane resonances", *IEEE Trans. EMC*, vol. 40, no. 2, pp. 111-119, May 1998.
- [2] V. Ricchiuti, "Supply decoupling on fully populated high-speed digital PCBs", *IEEE Trans. EMC*, vol. 43, pp. 671-676, Nov. 2001.
- [3] J. Fan et al., "DC power-bus modelling and design with an MPIE formulation and circuit extraction", *IEEE Trans. EMC*, vol. 43, no. 2, pp. 426-436, May 2001.
- [4] X. Ye et al., "DC power-bus design using FDTD modeling with dispersive media and surface mount technology", *IEEE Trans. EMC*, vol. 43, no. 4, pp. 579-587, Nov. 2001.
- [5] J. Trinkle et al., "Efficient impedance calculation of loaded power ground planes", in *Proc. 15th Zurich Symp. EMC*, Zurich, Switzerland, 18, pp. 285-290, Feb. 2003.
- [6] T. Okoshi, *Planar Circuits for Microwaves and Lightwaves*, Berlin, Germany: Springer-Verlag, 1985.
- [7] S. Kahng, "Study on the effect of metal-wall loading on the DC power-bus", *JKEES*, vol. 5, no. 4, pp. 193-196, Dec. 2005.
- [8] A. Peterson et al., *Computational Methods for Electromagnetics*, OSP & IEEE, 1998.

### 강 승 택



1996년 3월~2000년 2월: 한양대학교 전자통신공학 (공학박사)  
 2000년 2월~2000년 4월: 한양대학교 산업과학연구소 연구원  
 2000년 4월~2004년 2월: 한국전자통신연구원 통신위성개발센터 선임연구원

2004년 3월~현재: 인천대학교 정보통신공학과 교수  
 [주 관심분야] 전자파 수치해석 및 응용, EMI/EMC 대책, 초고주파 부품 및 안테나 설계