Electrochemical Assay of Neurotransmitter Glycine in Brain Cells

Articles

Electrochemical Assay of Neurotransmitter Glycine in Brain Cells

Suw Young Ly* and Dong Young Kim*

Biosensor Research Institute, Seoul National University of Technology, Seoul 139-743, Korea. ^{*}E-mail: suwyoung@snut.ac.kr ^{*}Advanced Scientific Experiment Group in DaeJin High School, Seoul 139-230, Korea Received November 20, 2006

Neurotransmitter glycine in the nano gram range was analyzed using a paste electrode (PE) in cyclic voltammetry (CV) and square-wave stripping voltammetry (SWSV). An anodic peak caused by oxidation of the glycine ion appeared at the 0.4 V (versus Ag/AgCl/KCl) potential in a 0.1 M NH₄H₂PO₄ electrolyte solution. At optimized conditions, the working range of the SWSV and CV concentration was found to be 5-60 ngL⁻¹ glycine; precision of R² = 0.9816 (SWSV) and 0.9986 (CV); and detection limit of 0.65 ngL⁻¹ (5.82 × 10⁻¹² molL⁻¹) (S/N = 3). The optimized conditions were applied to an assay in a fish brain tissue and a living brain cell in real time.

Key Words : Voltammetry, Neurotransmitter, Glycine, Fish, Brain

Introduction

Neurotransmitters of glycine and their corresponding analogy are present in the composition of the brain, liver. lung and kidney tissue in the human body. Diagnosis of this extracellular brain assay is important in the evaluation of schizophrenia, anxiety related disorders, stroke, Parkinson's disease. and depression.1 Measuring neurotransmitters is important in medicine, neuropsychiatric science, and other analytical fields.^{2,3} It has been shown that various analytical methods achieve low detection limit (DL) in laboratory conditions. For example, liquid chromatography achieved 5.07 nM DL per 20 μ L injection volume.² a solid-state optically based selective sensor yielded DL; 30 nM.⁴ an H¹-NMR spectra method yielded DL: 15 μ M.⁵ an HPLC-fluorescence detector yielded DL: 40 nM.6 a high-performance liquid chromatography with photodiode array detection yielded DL; 0.154 μ M.⁷ a high-performance liquid chromatographic and colorimetric assay exhibited DL; 6 ng.8 capillary electrophoresis with laser-induced fluorescence detection exhibited DL: 23 nM.9 capillary electrophoresis with lightemitting diode-induced fluorescence detection vielded DL: 9.3 nM.10 and a column-switching HPLC tandem mass spectrometric method yielded a concentration range of 5-200 ngmL^{-1,11} However, all these methods demand separation and other detection systems, such as photometric or electrochemical systems. In analytical science, simpler and more sensitive methods are required. Electrochemical systems have long been recognized as simple, fast and powerful tools for trace analysis 12-14 In biological assay, glycine and its analogy are composed of very low concentration ranges of nano- or picogram ranges. In this study, a highly sensitive working electrode was prepared using a new type of carbon nanotube electrode exhibiting various physical and electrochemical properties.¹⁵⁻²⁰ Moreover, DNA, which has a specific affinity for various molecular recognition in analytical chemistry.²¹ was immobilized on the carbon nanotube surface using cyclic voltammetry. DNA's electrical biosensing property was seen in several other papers.²²⁻²⁵ and can be used in a bioassay^{26,27} that described the optimization of a combined electrode for glycine assay. This successfully yielded a lower detection limit compared to common analytical methods.^{2,4+10} The results were applied in real-time assay in mammalian tissue and can also be applicable to human neuropsychiatric science in real time.

Experimental Design

Preparation of Electrode. The PE working sensor was made with a DNA, carbon nanotube and mineral oil. The PE was prepared by mixing 40% nanotube graphite powder (Nanostructured & Amorphous Materials, Inc.) and 40% DNA (double-stranded and prepared from calf thymus sigma) with 20% mineral oil. The mixture was homogenized in a mortar for 30 minutes. The mixed paste was then inserted into a 5 cm-long plastic needle-type capillary tube with a diameter of 1.5 mm, and a copper wire with a diameter of 0.5 mm was connected to the electrochemical measurement system. An Ag/AgCl electrode and a platinum wire electrode served as the reference electrode and the auxiliary electrode, respectively. A three-electrode cell was used to monitor the voltammetric signal.

Reagents. All experimental solutions were prepared from 18 M ohm cm⁻¹ double-distilled water. A 0.1 M NH₄H₂PO₄ solution with a pH level of 4.75 served as a supporting electrolyte solution. Standard glycine was prepared with an analytical grade of Aldrich Chemical Co (111.5; MW glycine-HCl). All the systems were carried out in dissolved

oxygen, and an electrode cleaning time was not necessary for every measurement. The phosphoric acid solution was found to be the most suitable medium.

Experimental Procedure. The common parameter for CV was a scan rate of 100 mVs^{-1} , and the common parameters for SWSV were set at optimized conditions. DNA immobilization was performed through a cyclic scan with an initial potential of ± 1.6 V. a switching potential of 0.6 V. and a scan rate of 0.5 mVs^{-1} , with a tan cyclic repeat to stabilize the electrode surface. Since the voltammetric response of glycine is dependent on the electrolyte solutions and the hydrogen ionic strength, various types of electrolyte solutions were tested. The phosphate solution was found to yield the best results.

Results and Discussion

Cyclic Voltammetry. First. peak potentials for glycine were determined using wide potential ranges from -0.8 to 1.6 V. At the anodic scan, strong current of 0.4 V and weak current of 0.8 V potentials were obtained, under which 0.4 V oxidation occurred on the electrode surface with glycine adsorbates for the cationic (1): NH₃⁻CH₂COOH <---(1)acid range---> NH₃⁻CH₂COO⁻ <---(2)--->NH₂CH₂COO⁻, while other 0.8 V peak potentials depended on the second reaction (2). In this configuration, glycine varies from being cationic. zwitterionic, and anionic by the accumulation potential and hydrogen ionic strength.²⁸⁻³⁰ and only irreversible anodic current appeared.³¹ Thus, analytically usable 0.4 V peak potentials were examined using increased concentrations. Figure 1(A) shows the results, where conditions of 0.4 V also linearly increased. All the other experiments used these results. In Figure 1(B), more exact peak potentials were compared using the common type glassy carbon, the pencil type electrode. 32.33 the carbon nanotube paste electrode, and the DNA-mixed carbon nanotube paste electrode. and obtained the same peak potentials. Calibration curve shows 4 points of 0.2-0.8 mgL⁻¹ glycine spikes in the same

contained cell. Both peaks appeared at the same potential of 0.4 V, and peak highs of 7.23×10^{-5} A (DNAPE) and 0.934 $\times 10^{-5}$ A (nanotube) were obtained. In the figure, the DNAPE electrode is shown to have more sensitively responded compared to the nanotube electrode. Thus, more sensitive working ranges were examined using SWSV accumulation systems.

Optimization of SW Parameters. The SWSV accumulation time was determined to be in the range of 50-500 s with 10 points using magnetic stirring condition. Figure 2(A) shows the results. At the range of 50-300 s, the peak current very quickly responded and the peak width sharply appeared, under which -0.43 V depended on the diffusion and migration effects of (2) NH3⁻CH2COO⁻ <---(2)---> NH₂CH₂COO⁻, whereas from 300 to 500 s, the peak high slowly decreased and reached a steady state. The maximum peak was found to be at the 300s accumulation time with $10.58 \pm 0.75 \times 10^{-6}$ A mean peak was repeatedly measured (n = 3, RSD = 9.58%). All the other experiments were performed using these results. At these conditions, the accumulation potential was examined using an anodic scan from -0.5 to 0.2 V. Figure 2(B) shows the results. The peak width did not change and only the peak high responded, and -0.4 V peak potential sensitively appeared with a 10.44 \pm 0.65×10^{-7} A mean (n = 4. RSD = 8.50%), peak current high. This slowly and continuously decreased afterwards. The results indicate poorer response compared to the accumulation time, and an examination of the negative stripping showed that no signals were obtained. Electrolyte hydrogen ionic strength was determined using 0.1 M NaOH and 0.1 M HCl solution spiking. Figure 2(C) shows the effects. In the acid and more base ranges of pH 2.58-4.06 and 5.37-7.76. the peaks did not respond. and at the 4.75 pH. large currents of $4.437 \pm 0.55 \times 10^{-6}$ A mean (n = 3, RSD = 7.60%) appeared, as influence of the hydrogen reaction of (1)acid range, $(NH_3^-CH_2COOH \leq \cdots \leq NH_3^+CH_2COO)$. The results appear to be more sensitive compared to the accumulation potential but less sensitive than the accumu-

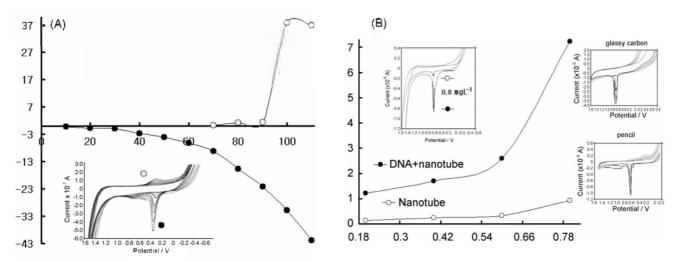


Figure 1. (A): Cyclic voltammetry for DNAPE, various concentrations of 10-, 20-, 30-, 40-, 50-, 60-, 70-, 80-, 90-, 100- and 110 ugL⁻¹ glycine spike. (B): Comparison of the carbon nanotube (- \odot -) and DNAPE (- \bullet -) electrodes in glycine concentrations of 0.2, 0.4, 0.6 and 0.8 mgL⁻¹ using cyclic voltammetry (inner CV: 0.8 mgL⁻¹) in a 0.1 M ammonium phosphate solution (pH 4.5) with a scan rate of 100 mVs⁻¹.

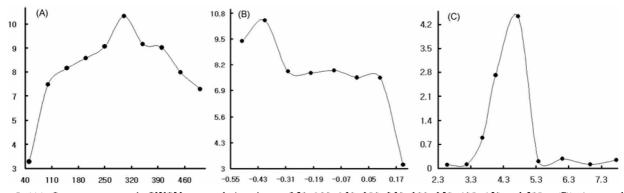


Figure 2. (A): Current response in SWSV accumulation times of 50, 100, 150, 200, 250, 300, 350, 400, 450 and 500 s. (B): Accumulation potentials of -0.5, -0.4, -0.3, -0.2, 0, 0.1 and 0.2 V. (C): Electrolyte hydrogen ionic strength for 2.58, 3.18, 3.66, 4.75, 5.37, 6.11, 6.96 and 7.76 pH in 0.65 mgL⁻¹ glycine spike. Other experimental conditions used are the same as those in Fig. 3.

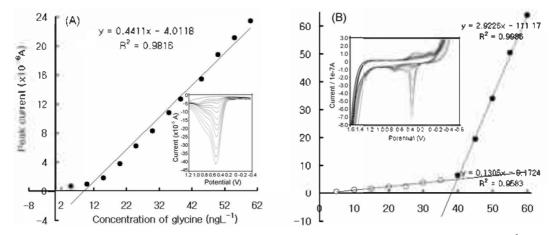


Figure 3. (A): SWSV and (B): CV working ranges of 5-, 10-, 15-, 20-, 25-, 30-, 35-, 40-, 45-, 50-, 55- and 60 ngL⁻¹ glycine in a 0.1 M ammonium phosphate solution. SWSV: An amplitude of 0.2 V, frequency of 500 Hz, accumulation potential of -0.4 V and accumulation time of 300 s were used with a pH of 4.75. CV: An initial potential of -0.6 V, switching potential of 1.6 V and scan rate of 0.5 V/s were used.

lation times shown in Figure 2(A). At optimized conditions, other parameters of the SW frequency, the SW increment potential, and the SW amplitude were examined, and the results of 500 Hz. 0.04 V and 0.20 V as obtained are not shown here. At these conditions, various analytical interference ions were examined by adding other metals and analog neurotransmitters into the medium containing 0.1 mgL⁻¹ of glycine, for the tenfold spiking of 1 mgL⁻¹ of Co. Ba. Bi, Ge, Ca. Fe, Cr. dopamine, catechol, epinephrine, vitamin C, and glucose ions. This yielded results of 62.5%, 760.7%, 137.9%, 182.9%, 194.2%, 293.2%, -40.1%, 19.8%, 14.8%, 32.2%, 38.2% and 48.9%, respectively. The analytical interferences were effectively corrected using standard addition methods. At these conditions, the usable working range was examined using SWSV and CV.

Statistics, Working Range and Application in Brain Tissue. At optimized conditions, detectable working ranges of milli- and microgram ranges were obtained, whereas Figure 3(A) shows the nanogram ranges for SWSV and CV in raw voltammograms. All the peaks sharply responded from 15- to 60 ngL⁻¹ SWSV with 10 points, and the linear equations for the $\Delta x/\Delta y = 0.4411$ sensitivity, the -4.0118 intersection, and the R² = 0.9816 precision were calculated. This is shown to be more highly sensitive compared to other

common methods. Figure 3(B) shows that the CV results at the 5-35 nanogram range increased slowly and the peak currents responded to the slope ratio of $\Delta x/\Delta y = 0.1305$ -0.1724 and the precision of $R^2 = 0.9583$. The range of 40-60 ngL⁻¹ glycine for the five points linearly increased with $\Delta x/\Delta y = 2.9226$ and the intersect of -111.17, the precision of $R^2 = 0.9986$ was calculated, the 0.4 V potential appeared, and small 0.8 V anodic and 0.4 V cathodic peaks were obtained. These two peaks were not used in the analytical applications. These results show that the SW peak current responded more sensitively compared to the CV peak high.

Finally, an analytical application was carried out on living fish. Figure 4(A) shows the diluted fish brain tissue. A fish sample was prepared with an extracted 0.2781 g brain tissue with flashly and diluted in 10mL distilled water with one drop each of 0.1 M HNO₃ and ethyl alcohol added. Figure 4(A) shows that the first blank curve did not obtain any signal. Subsequently, the 0.2 mL tissue solution was spiked, and at this curve, a small peak potential of 0.4 V appeared at the same conditions as those of the other cells. Moreover, 20- and 40 μ gL⁻¹ glycine were spiked, and the 1.24 ± 0.45 μ g/mL mean (n = 3. RSD = 5.40%) result was calculated using the standard addition method. This can be applied to in vivo diagnosis. Figure 4(B) shows the electric circuit of an

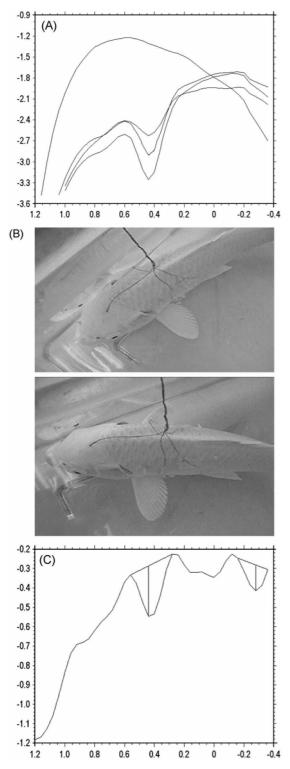


Figure 4. (A): Application of diluted brain tissue with SWSV. The first peak corresponds with the blank solution, while the next peak corresponds with the diluted tissue solution of 0.2 mL spike and the 20- and 40 μ g/L glycine standard solution spikes. The other parameters in Fig. 3 were also used here. (B): *In vivo* assay at a living brain core. (C) The peak current of (B).

in vivo implantation, indicating better sensitivity in the application on living fish brain tissue. A working electrode was inserted in the fish brain's 7 mm core using a needle-

Suw Young Ly and Dong Young Kim

type micro hand drill with a 0.2 mm diameter under anesthesia. A 10 mm long Ag/AgCl: Cl coated Ag wire with a 0.1 mm diameter was used as the reference electrode. A counter electrode (Pt 0.1 mm diameter) was inserted 5 mm deep into the backbone tissue, and all the electrodes were cemented with a tooth binder and connected to a 0.05 mm enamel-coated copper wire with an electrochemical system. Stripping was performed at optimized conditions. Figure 4(C) shows the results of 0.26×10^{-6} A peak high. at 0.4 V. an anodic peak current was successfully obtained, which can be used in any other mammalian assay in real time. Expanded applications were performed with known contents of 20.0 mg/L glycine for D-company's product in Korea with a drug sample of one tablet. The results yielded contents of $19.7 \pm$ $0.56 \text{ mgL}^{-1} \text{ A}$ mean (n = 3. RSD = 6.70%) at optimal conditions. The values had satisfactory results that ranged from 95% to 105.5%. The proposed methods can be useful in extracellular, neuropsychiatric and other medicinal assays.

Conclusions

Voltammetric analysis of glycine was performed using DNA immobilized on a carbon nanotube PE. The optimum analytical conditions were set at 300 s accumulation time, -0.4 V initial potential, 4.75 pH strength, 500 Hz SW frequency, 0.04 V SW increment and 0.20 V SW amplitude. The results approximated the nanogram range and reached lower detection limits compared with other common methods. The results were applied to detection in diluted fish brain tissue and a living fish brain cell. Diagnosis can also be applied in body fluid assay and in any other field requiring mammalian assay in real time.

References

- Khandelwal, P.; Beyer, C. E.; Lin, Q.; McGonigle, P.; Schechter, L. E.; Bach II, A. C. J. Neurosci. Meth. 2004, 133, 181.
- Penugonda, S.; Wu, W.; Mare, S.; Ercal, N. J. Chromatog: B 2004, 807, 251.
- Ornung, G.; Shupliakov, O.; Linda, H.; Ottersen, O. P.; Storm-Mathisen, J.; Ulfhake, B.; Cullheim, S. J. Comp. Neurol. 1996, 365, 413.
- Awawdeh, M. A.; Legako, J. A.; Harmon, H. J. Sensor Actual. Bchem. 2003, 91, 227.
- Lee, M. B.; Storer, M. K.; Blunt, J. W.; Lever, M. Clin. Chim. Acta 2006, 365, 264.
- 6. Storer, M. K.; Lever, M. Anal. Chim. Acta 2006, 558, 319.
- Naval, M. V.; Serranillos, M. P. G.; Carretero, M. E.; Arce, C. D. J. Chromatogr. A. 2006, 1121, 242.
- Kang, X.; Xiao, J.; Huang, X.; Gu, Z. Clin. Chim. Acta 2006, 366, 352.
- Veledo, M. T.; Frutos, M.; Diez-Masa, J. C. J. Chromatog: A 2005, 1079, 335.
- Lu, M. J.; Chiu, T. C.: Chang, P. L.; Ho, H. T.: Chang, H. T. Anal. Chim. Acta 2005, 538, 143.
- Zagrobelny, J.; Chavez, C.; Constanzer, M.; Matuszewski, B. K. J. Pharmaceul. Biomed. 1995, 13, 1215.
- Ly, S. Y.; Song, S. S.; Kim, S. K.; Jung, Y. S.; Lee, C. H. Food Chem. 2006, 95, 337.
- Ly, S. Y.; Kim, S. K.; Kim, T. H.; Jung, Y. S.; Lee, S. M. J. Appl. Electrochem. 2005, 35, 567.

- 14. Ly, S. Y.; Chae, J. I.; Jung, Y. S.; Jung, W. W.; Lee, H. J.; Lee, S. H. Nahrung. 2004, 48, 201.
- Wang, J.; Hocevar, S. B.; Ogoreve, B. *Electrochem. Commun.* 2004, *6*, 176.
- 16. Katz, E.; Willner, I. Chem. Phys. 2004, 5, 1084.
- 17. Li, J.; Cassell, A. M.; Dai, H. Surf. Interface. Anal. 1999, 28, 8.
- Chunya, L.; Guoqing, Z.; Qingdan, Y.; Jianjie, L. Bull. Korean Chem. Soc. 2006, 27, 1854.
- 19. Chunya, L. Bull. Korean Chem. Soc. 2006, 27, 991.
- Junjie, F.; Kangbing, W.; Lanhua, Y.; Junan, L. Bull. Korean Chem. Soc. 2005, 26, 1403.
- 21. Radi, A. Talanta 2005, 65, 271.
- Luo, J. W.; Zhang, M.: Pang, D. W. Sensors and Actuators B 2005, 106, 358.
- Kerman, K.; Morita, Y.; Takamura, Y.; Ozsoz, M.; Tamiya, E. Electroanal. 2004, 16, 1667.
- Hazani, M.; Hennrich, F.; Kappes, M.; Naaman, R.; Peled, D.; Sidorov, V.; Shvarts, D. Chem. Phys. Lett. 2004, 391, 389.

- Guo, M.; Chen, J.; Liu, D.; Nie, L.; Yao, S. *Bioelectrochemistry* 2004, 62, 29.
- Marrazza, G.; Tombelli, S.; Maseini, M.; Manzoni, A. Clin. Chim. Acta 2001, 307, 241.
- Jelen, F.; Erdem, A. E.; Paleck, E. Bioelectrochemistry 2002, 55, 165.
- Zhen, C. H.; Sun, S. G.; Fan, C. J.; Chen, S. P.; Mao, B. W.; Fan, Y. J. *Electrochim. Acta* **2004**, *49*, 1249.
- 29. Yeo, I. H.; Johnson, D. C. J. Electroanal. Chem. 2001, 495, 110.
- Barlow, S. M.; Kitching, K. J.; Haq, S.; Richardson, N. V. Surf. Sci. 1998, 401, 322.
- Seal, S.; Kuiry, S. C.; Heinmen, B. Thin Solid Films 2003, 423, 243.
- 32. Bnd, A. M.; Mahon, P. J.; Schiewe, J.; Beckett, V. V. Anal. Chim. Acta 1997, 345, 67.
- Karadeniz, H.; Gulmez, B.; Sahinei, F.; Erdem, A.; Kaya, G. I.; Unver, N.; Kiveak, B.; Ozsoz, M. J. Pharmaceut. Biomed. 2003, 33, 295.