

• Original Article

# Ecological Risk Assessment of Chemicals Migrated from a Recycled Plastic Product

Ji-Yeon Roh<sup>1</sup>, Min-Hyuck Kim<sup>2</sup>, Woo Il Kim<sup>3</sup>, Young-Yeul Kang<sup>3</sup>, Sun Kyoung Shin<sup>3</sup>, Jong-Guk Kim<sup>4</sup>, Jung-Hwan Kwon<sup>1</sup>

<sup>1</sup>Division of Environmental Science and Ecological Engineering, Korea University, Seoul; <sup>2</sup>Department of Environmental Engineering, Ajou University, Suwon; <sup>3</sup>Resource Recirculation Research Division, National Institute of Environmental Research, Incheon; <sup>4</sup>Department of Environmental Engineering, Chonbuk National University, Jeonju, Korea

**Objectives:** Potential environmental risks caused by chemicals that could be released from a recycled plastic product were assessed using a screening risk assessment procedure for chemicals in recycled products.

**Methods:** Plastic slope protection blocks manufactured from recycled plastics were chosen as model recycled products. Ecological risks caused by four model chemicals – di-(2-ethylhexyl) phthalate (DEHP), diisononyl phthalate (DINP), cadmium (Cd), and lead (Pb)– were assessed. Two exposure models were built for soil below the block and a hypothetical stream receiving runoff water. Based on the predicted no-effect concentrations for the selected chemicals and exposure scenarios, the allowable leaching rates from and the allowable contents in the recycled plastic blocks were also derived.

**Results:** Environmental risks posed by slope protection blocks were much higher in the soil compartment than in the hypothetical stream. The allowable concentrations in leachate were  $1.0 \times 10^{-4}$ ,  $1.2 \times 10^{-5}$ ,  $9.5 \times 10^{-3}$ , and  $5.3 \times 10^{-3}$  mg/L for DEHP, DINP, Cd, and Pb, respectively. The allowable contents in the recycled products were  $5.2 \times 10^{-3}$ ,  $6.0 \times 10^{-4}$ ,  $5.0 \times 10^{-1}$ , and  $2.7 \times 10^{-1}$  mg/kg for DEHP, DINP, Cd, and Pb, respectively.

**Conclusions:** A systematic ecological risk assessment approach for slope protection blocks would be useful for regulatory decisions for setting the allowable emission rates of chemical contaminants, although the method needs refinement.

**Keywords** Cadmium, Leachate, Lead, Phthalate esters, Recycled plastics

**Correspondence:**

Jung-Hwan Kwon, PhD  
 145 Anam-ro, Seongbuk-gu, Seoul  
 136-701, Korea  
 Tel: +82-2- 3290-3041  
 Fax: +82- 2-953-0737  
 E-mail: [junhwankwon@korea.ac.kr](mailto:junhwankwon@korea.ac.kr)

Received: August 1, 2013

Accepted: September 24, 2013

Published online: November 22, 2013

This article is available from: <http://e-eh.t.org/>

## Introduction

The recycling of plastics is encouraged worldwide and new products made from recycled plastics have been developed under governmental policies giving incentives for recycling plastics. However, engineering processes in recycling and products from recycled plastics may cause other environmental problems such as the release of contaminants during recycling processes or from the recycled products. Chemical additives or residual catalyses in recycled plastics may migrate to the environment.

For example, a few studies have shown that the release of anti-mony and other metals from recycled polyethylene terephthalate plastic bottles may cause health concerns [1-3]. However, the effects of chemicals from recycled plastic products on human and ecosystem health are rarely investigated.

It is generally believed that recycled plastic products contain more impurities and potentially more chemical contaminants such as metals than those manufactured from plastic pellets without recycling [1,4]. Under the Korean act on the promotion of saving and recycling of resources [5], it is required to

evaluate the usage and methodology of plastic recycling before the recycling process and the resulting product is approved by the Ministry of Environment. However, this regulatory process experiences difficulties in implementation due to the lack of standardized methods for evaluating the environmental impact caused by recycling processes and products. The current guideline for environmental risk assessment of chemicals in Korea does not specify the method of estimating predicted environmental concentration by using recycled products.

In this study, we propose a methodology for environmental risk assessment of hazardous chemicals that might be released to the environment from recycled plastic products. Slope protection blocks were chosen as the model recycled plastic products and four chemicals, di-(2-ethylhexyl) phthalate (DEHP), diisononyl phthalate (DINP), cadmium (Cd), and lead (Pb), were chosen as model contaminants, because phthalate esters [6-8] and cadmium and lead are typical heavy metal elements found in many plastic products [9-11]. Two exposure models were built for the soil compartment under the blocks and a hypothetical stream nearby receiving runoff water. Based on the predicted no-effect concentrations for the selected chemicals and exposure scenarios, the maximum allowable emission rates from the recycled plastic blocks were also derived.

## Materials and Methods

### Exposure Models


Chemicals released from slope protection blocks may affect both soil and water environments. In order to evaluate the potential environmental impact of chemical contaminants from slope protection blocks, two exposure models – soil and stream models – were built.

#### Soil Model

Figure 1A shows a schematic diagram of the chemical transport processes in the soil model. Because the chemicals released from slope protection blocks are mobilized by water, infiltration and leaching are considered the most important processes determining the fate of chemicals in the soil. Assuming phase equilibrium between soil and pore water, for a given box of the soil compartment below the slope protection blocks, a simple mass-balance equation is as follows:

$$\rho_{\text{soil}} V_{\text{soil}} \frac{dC_{\text{soil}}}{dt} = r_{\text{leaching}} A \left( C_{\text{leaching}} - \frac{C_{\text{soil}}}{K_{\text{sw}}} \right) - k \rho_{\text{soil}} V_{\text{soil}} C_{\text{soil}} \quad (1)$$

where  $\rho_{\text{soil}}$  is the density of soil ( $\text{kg}/\text{m}^3$ ),  $V_{\text{soil}}$  is the volume of the soil compartment ( $\text{m}^3$ ),  $C_{\text{soil}}$  is the concentration of a chemi-

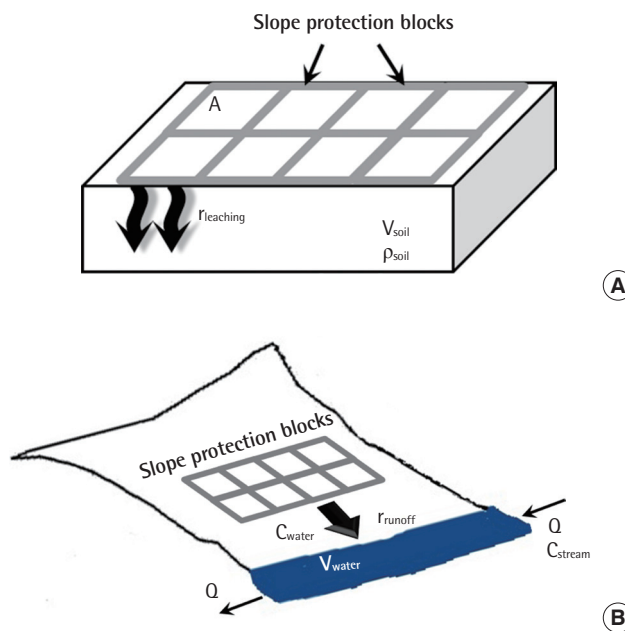

**Figure 1.** Schematic diagram of the exposure model for the risk assessment of chemicals released from slope protection blocks in the (A) soil compartment and (B) stream segment.

cal in the soil ( $\text{mg}/\text{kg}_{\text{soil}}$ ),  $t$  is time (sec),  $r_{\text{leaching}}$  is the vertical leaching rate of water ( $\text{m}/\text{sec}$ ),  $A$  is the area of the soil compartment ( $\text{m}^2$ ),  $C_{\text{leaching}}$  is the concentration of the chemical in the leachate ( $\text{mg}/\text{m}^3$ ),  $K_{\text{sw}}$  is the equilibrium partition coefficient of the chemical between the soil and pore water ( $\text{m}^3/\text{kg}$ ), and  $k$  is the pseudo-first-order degradation rate constant of the chemical ( $\text{sec}^{-1}$ ). Assuming steady-state and negligible degradation of the chemical in the soil compartment, equation (1) was simplified and  $C_{\text{soil}}$  was calculated as follows:

$$C_{\text{soil}} = K_{\text{sw}} C_{\text{leaching}} \quad (2)$$

#### Stream Model

Slope protection blocks are usually built on the cut slope near a small stream. Figure 1B shows a conceptual diagram of the runoff water flowing into the stream over the slope protection blocks. For a stream segment receiving the runoff water, a simple mass-balance equation for the concentration of a chemical in the water ( $C_{\text{water}}$ ) is as follows:

$$V_{\text{water}} \frac{dC_{\text{water}}}{dt} = r_{\text{runoff}} + Q(C_{\text{stream}} - C_{\text{water}}) \quad (3)$$

where  $V_{\text{water}}$  is the volume of water in the stream segment ( $\text{m}^3$ ),  $r_{\text{runoff}}$  is the loading rate of the chemical to the stream segment due to the chemical leaching from the slope protection blocks ( $\text{mg}/\text{sec}$ ),  $Q$  is the volumetric flow rate of water in the stream segment ( $\text{m}^3/\text{sec}$ ), and  $C_{\text{stream}}$  is the background concentration of the chemical in water flowing into the segment ( $\text{mg}/\text{m}^3$ ). Assuming steady-state and that  $C_{\text{stream}}$  is negligibly smaller than  $C_{\text{water}}$ ,  $C_{\text{water}}$

is calculated as follows:

$$C_{\text{water}} = r_{\text{runoff}} / Q \quad (4)$$

In order to estimate  $r_{\text{runoff}}$ , conservative assumptions were made. The chemical loading rate to the stream (in mg/sec) can be calculated by multiplying the precipitation rate over the area of the slope protection blocks ( $Q_{\text{precip}}$  m<sup>3</sup>/sec), runoff coefficient ( $K$ , dimensionless), and the concentration of a contaminant in the leachate ( $C_{\text{leaching}}$ ) (equation 5).

$$r_{\text{runoff}} = Q_{\text{precip}} K C_{\text{leaching}} \quad (5)$$

## Derivation of the Allowable $C_{\text{leaching}}$ Based on Risk Assessment

For the four model chemicals, predicted no effect concentrations (PNECs) were taken from the European Union risk assessment reports on existing chemicals [7,8,12,13]. An environmental risk quotient is calculated by dividing predicted environmental concentration (PEC) by the PNEC. In this study,  $C_{\text{soil}}$  and  $C_{\text{water}}$  were used for the PEC. However, these values could not be calculated due to the limited information about  $C_{\text{leaching}}$  and  $r_{\text{runoff}}$ . Values of  $C_{\text{leaching}}$  or  $r_{\text{runoff}}$  could be obtained by laboratory leaching tests or field measurements. Without experimentally measured values, we used the PNECs in the soil or in stream water to derive the allowable concentration in the leachate (equations 6 and 7).

$$C_{\text{leaching, allowed}} = \frac{\text{PNEC}_{\text{soil}}}{K_{\text{sw}}} \quad (\text{for the soil model}) \quad (6)$$

$$C_{\text{leaching, allowed}} = \frac{Q}{Q_{\text{precip}} K} \text{PNEC}_{\text{water}} \quad (\text{for the stream model}) \quad (7)$$

## Results

### Assessment of Model Parameters

#### Soil Model

Although various parameters are included in equation (1), the only required parameter for the assessment of the allowable leaching concentration is  $K_{\text{sw}}$ . For cadmium and lead,  $K_{\text{sw}}$  values were taken from the literature [14,15], as shown in Table 1. The values of  $K_{\text{sw}}$  for two phthalate esters were estimated using the

**Table 1.** Chemical parameters used for the soil model

Chemical	Parameter		References
	log $K_{\text{ow}}$	$K_{\text{sw}}$ (m <sup>3</sup> /kg)	
Cadmium	N/A	0.12	[13]
Lead	N/A	4.0	[14]
Di-(2-ethylhexyl) phthalate	7.5	130	[5]
Diisononyl phthalate	8.8	2600	[17]

N/A, non-applicable.

hydrophobic sorption hypothesis, in which the sorption of hydrophobic organic chemicals to soil phase is dominated by soil organic carbon [16]:

$$K_{\text{sw}} = 1000 f_{\text{oc}} K_{\text{oc}} \quad (8)$$

where  $f_{\text{oc}}$  is the fraction of organic carbon and  $K_{\text{oc}}$  is the partition coefficient between organic carbon and water (L/kg). The value of  $f_{\text{oc}}$  was assumed to be 0.01, as suggested by Chiou and Kile [17]; the values of  $K_{\text{oc}}$  were estimated from  $K_{\text{ow}}$  values [6,18] using the following relationship [19]:

$$K_{\text{oc}} = 0.41 K_{\text{ow}} \quad (9)$$

#### Stream Model

As described in equation (4), two parameters ( $r_{\text{runoff}}$  and  $Q$ ) need to be evaluated in the hypothetical stream. Because there are large variations in precipitation rate and volumetric flow rate of a stream in Korea [20,21], the annual average and peak values for the two parameters were used. For this purpose, we estimated the model parameters using small tributary streams of Gapyeong Stream, one of the biggest tributary streams to the North Han River, as model streams. Gapyeong main stream is a typical local river containing 13 branch streams. We collected basic data to calculate average values of  $Q$  under annual average and peak conditions in the Report of Basic Plan for the Gapyeong Stream (Table 2) [22] and deducted one main stream and four branches according to "Article 2 of the enforcement decree of the Small River Maintenance Act" [23].

$Q_{\text{precip}}$  was identified based on the rainfall intensity over the past 30 years, from 1981 to 2010 [21,24]. The annual average and maximum precipitation rates were approximated to be 1300 mm/yr and 70 mm/hr, respectively. The land area covered by slope protection blocks was assumed to be 3000 m<sup>2</sup>. Because the runoff coefficient for stiff slopes is 0.4 to 0.6 [24], 0.6 was used for conservative assessment. Because  $Q_{\text{precip}}$  can be calculated by multiplying the precipitation rate, covered area, and runoff coefficient, the values of  $Q_{\text{precip}}$  were obtained under the annual average and intensive rain conditions (Table 2).

### Allowable $C_{\text{leaching}}$ Based on Screening Risk Assessment

Table 3 shows the PNEC values for the soil compartment and the hypothetical stream and calculated allowable  $C_{\text{leaching}}$  values. The allowable levels of the four selected contaminants ranged

**Table 2.** Evaluation of the stream flow rate ( $Q$ ) and the runoff flow rate ( $Q_{\text{precip}}$ )

	Annual average	Maximum
Stream flow rate ( $Q$ )	$5.697 \times 10^{-2}$ (m <sup>3</sup> /sec)	$3.126 \times 10^2$ (m <sup>3</sup> /sec)
Runoff flow rate ( $Q_{\text{precip}}$ )	$1.30 \times 10^3$ (mm/yr)	70 (mm/hr)

**Table 3.** Predicted no-effect concentrations (PNECs) and the allowable leaching concentrations of the selected chemical contaminants

Chemical contaminant	DEHP	DINP	Cd	Pb
PNEC <sub>soil</sub> (mg/kg)	13	30	1.15	21
PNEC <sub>w</sub> (µg/L)	0.097	3.4	0.19	0.04
C <sub>leaching, allowed</sub> (mg/L)				
Soil model	1.0×10 <sup>-4</sup>	1.2×10 <sup>-5</sup>	9.5×10 <sup>-3</sup>	5.3×10 <sup>-3</sup>
Stream model, average condition	75	2.6×10 <sup>3</sup>	1.5×10 <sup>2</sup>	31
Stream model, peak condition	8.7×10 <sup>2</sup>	3.0×10 <sup>4</sup>	1.7×10 <sup>2</sup>	3.6×10 <sup>2</sup>

DEHP, di-(2-ethylhexyl)phthalate; DINP, diisononyl phthalate; Cd, cadmium; Pb, lead.

from sub microgram to 10 micrograms per liter using the soil model. On the contrary, those using the stream model were more than a few orders of magnitude higher. This indicates that the risks posed by chemical contaminants leaching from slope protection blocks and similar construction materials would be higher in the soil compartment compared with those in the water compartment. Thus, the refined assessment with measured concentration of chemical contaminants should focus on the levels of chemicals in the soil in direct contact with those materials.

### Assessment of Allowable Content of Contaminants in Recycled Slope Protection Blocks

Because the use of total content of contaminant in a recycled product is more useful in current regulations, we developed a plausible worst-case scenario for the derivation of the allowable content of the four model contaminants. In this scenario, we assumed that all contaminants in the slope protection blocks migrated in 1 year. The parameters assumed in this scenario are summarized in Table 4. Using these parameters, the volume of leachate per mass of slope protection blocks was 52 L/kg. Using the allowable C<sub>leaching</sub> values from the soil model in Table 3, the allowable contents were derived as 5.2×10<sup>-3</sup>, 6.0×10<sup>-4</sup>, 5.0×10<sup>-1</sup>, and 2.7×10<sup>-1</sup> mg/kg for DEHP, DINP, Cd, and Pb, respectively.

## Discussion

Although the screening risk assessment used for the derivation of the maximum allowable concentrations of chemical contaminants in the leachate from slope protection blocks has limitations, it would provide a useful systematic approach for regulatory decisions. The values listed in Table 3 could be used for comparison with those values obtained from a standardized leaching test at an environmentally relevant pH. If the experimentally measured concentration of a contaminant in a laboratory leaching test is lower than the allowable C<sub>leaching</sub> obtained by the risk assessment procedure used in this study, the use of the recycled plastic product could be regarded as not to cause sig-

**Table 4.** Parameters assumed for the derivation of the allowable contents of contaminants in a recycled slope protection block

Parameter	Value
Precipitation rate (m/yr)	1.3
Infiltration coefficient	0.4
Runoff coefficient	0.6
Depth of a slope protection block (m)	0.1
Mass of a slope protection block per area (kg/m <sup>2</sup> )	10

nificant harmful effects on the environment. In the opposite case, the use of the recycled product should not be allowed at this screening level assessment, and requires further refined assessment.

The migration of metals and other additives such as plasticizers from manufactured plastic products is of significant concern and the rate of migration strongly depends on the properties of the plastic because the diffusion coefficients of small chemicals in the plastic phase varies by more than a few orders of magnitude [25-27]. Thus, the approach exemplified in this study to deduce the allowable content of contaminants in the manufactured products should be used with great care.

In conclusion, the systematic ecological risk assessment approach used in this study for slope protection blocks as example recycled plastic products would be useful for regulatory decisions for setting the allowable emission rates or the content of chemical contaminants in a recycled product, although the method needs refinement and assumptions need to be validated further.

## Acknowledgements

This work was supported by the National Institute of Environmental Research (NIER).

## Conflict of Interest

The authors have no conflicts of interest with material presented in this paper.

## References

- Cheng X, Shi H, Adams CD, Ma Y. Assessment of metal contaminations leaching out from recycling plastic bottles upon treatments. *Environ Sci Pollut Res Int* 2010;17(7):1323-1330.
- Shotyk W, Krachler M. Contamination of bottled waters with antimony leaching from polyethylene terephthalate (PET) increases upon storage. *Environ Sci Technol* 2007;41(5):1560-1563.
- Shotyk W, Krachler M, Chen B. Contamination of Canadian and European bottled waters with antimony from PET containers. *J Environ Monit* 2006;8(2):288-292.
- Kim MS, Kim WI, Shin SK, Kang YY, Cho YA, Jeong SK, et al.

- Heavy metal exposure assessment of recycled plastic buckets. *Anal Sci Technol* 2013;26(1):67-72 (Korean).
5. Korea Ministry of Government Legislation. Act on the Promotion of Saving and Recycling of Resources, 2013 [cited 2013 Jul 13]. Available from: <http://www.law.go.kr/lsSc.do?menuId=0&p1=&subMenu=1&nwYn=1&query=%EC%9E%90%EC%9B%90%EC%9D%98+%EC%A0%88%EC%95%BD%EA%B3%BC+%EC%9E%AC%ED%99%9C%EC%9A%A9%EC%B4%89%EC%A7%84%EC%97%90+%EA%B4%80%ED%95%9C+%EB%B2%95%EB%A5%A0&x=49&y=11#liBcolor2> (Korean).
  6. Stales CA, Peterson DR, Parkerton TF, Adams WJ. The environmental fate of phthalate esters: a literature review. *Chemosphere* 1997;35(4):667-749.
  7. European Chemicals Bureau. European Union risk assessment report: 1,2-benzenedicarboxylic acid, di-C8-10-branched alkyl esters, C9-rich and di-isononyl phthalate (DINP) [cited 2013 Aug 1]. Available from: <http://echa.europa.eu/documents/10162/8fa0a07f-ec2a-4da6-bbe8-5b5e071b5c16>.
  8. European Chemicals Bureau. European Union risk assessment report: bis (2-ethylhexyl) phthalate (DEHP) [cited 2013 Aug 1]. Available from: <http://publications.jrc.ec.europa.eu/repository/bitstream/111111111/5648/1/dehpreport042.pdf>.
  9. Fowles GW The leaching of cadmium from plastic toys. *Sci Total Environ* 1977;7(3):207-216.
  10. Chen ZS. Cadmium and lead contamination of soils near plastic stabilizing materials producing plants in Northern Taiwan. *Water Air Soil Pollut* 1991;57-58(1):745-754.
  11. Wilson DC, Young PJ, Hudson BC, Baldwin G. Leaching of cadmium from pigmented plastics in a landfill site. *Environ Sci Technol* 1982;16(9):560-566.
  12. Lead Development Association International. European Union risk assessment report: lead metal, lead oxide, lead tetraoxide, and lead stabiliser compounds, voluntary risk assessment report appendices to the classification and effect assessment section. London: Lead Development Association International; 2008, p. 130-137.
  13. European Chemical Bureau. European Union risk assessment report: cadmium metal. Luxembourg: Office for Official Publications of the European Communities; 2007, p. 333-430.
  14. United States Environmental Protection Agency. Understanding variation in partition coefficient, volume II: review of geochemistry and available Kd values for cadmium, cesium, chromium, lead, plutonium, radon, strontium, thorium, tritium (3H), and uranium. Washington, DC: United States Environmental Protection Agency; 1999, p. C2-C16.
  15. Anderson PR, Christensen TH. Distribution coefficients of Cd, Co, Ni, and Zn in soils. *J Soil Sci* 1988;39(1):15-22.
  16. Gerritse RG, Vriesema R, Dalenberg JW, de Roos HP. Effect of sewage sludge on trace element mobility in soils. *J Environ Qual* 1982;11(3):359-364.
  17. Chiou CT, Kile DE. Deviations from sorption linearity on soils of polar and nonpolar organic compounds at low relative concentrations. *Environ Sci Technol* 1998;32(3):338-343.
  18. Syracuse Research Corporation. KOWWin v. 1.68. 2010.
  19. Karickhoff SW. Semi-empirical estimation of sorption of hydrophobic pollutants on natural sediments and soils. *Chemosphere* 1981;10(8):833-846.
  20. Korea Meteorological Administration. Climate information [cited 2013 Jul 26]. Available from: [http://www.kma.go.kr/weather/climate/average\\_south.jsp](http://www.kma.go.kr/weather/climate/average_south.jsp) (Korean).
  21. Ministry of Land, Infrastructure and Transport. Water management information system (WAMIS) [cited 2013 Jul 26]. Available from: [http://www.wamis.go.kr/wkw/wkw\\_flwsrrs\\_lst.aspx](http://www.wamis.go.kr/wkw/wkw_flwsrrs_lst.aspx) (Korean).
  22. Ministry of Land, Transport and Maritime Affairs. Report of basic plan for the Gapyeong stream. Gwacheon: Ministry of Land; 2009, p. 3-48-3-69 (Korean).
  23. Ministry of Government Legislation. Small River Maintenance Act 2009 [cited 2013 Jul 26]. Available from: <http://www.law.go.kr/lsSc.do?menuId=0&subMenu=1&query=%EC%86%8C%ED%95%98%EC%B2%9C%20%EC%A0%95%EB%B9%84%EB%B2%95#liBcolor0> (Korean).
  24. Ministry of Environment. A handbook for management of non-point pollutant source. Gwacheon: Ministry of Environment; 2005, p. 53-54 (Korean).
  25. Rusina TP, Smedes F, Klanova J. Diffusion coefficients of polychlorinated biphenyls and polycyclic aromatic hydrocarbons in polydimethylsiloxane and low-density polyethylene polymers. *J Appl Polym Sci* 2010;116(3):1803-1810.
  26. Cox SS, Little JC, Hodgson AT. Predicting the emission rate of volatile organic compounds from vinyl flooring. *Environ Sci Technol* 2002;36(4):709-714.
  27. Fries E, Zarfl C. Sorption of polycyclic aromatic hydrocarbons (PAHs) to low and high density polyethylene (PE). *Environ Sci Pollut Res Int* 2012;19(4):1296-1304.