

Optimization of Anthraquinone Dyes Decolorization Conditions with Response Surface Methodology by *Aspergillus*

Yufeng Ge, Bin Wei, Siyu Wang, Zhiguo Guo and Xiaolin Xu[†]

College of Chemistry and Chemical Engineering, Shihezi University, Key Laboratory for Green Processing of Chemical Engineering of Xinjiang Bingtuan, Xinjiang, Shihezi 832003, China

(Received 15 July 2014; Received in revised form 24 November 2014; accepted 30 November 2014)

Abstract – A large amount of dye wastewater poses a threat to environmental safety. Disperse blue, an anthraquinone dye that is widely used in textile dyes, is difficult to degrade in wastewater. In this work, one fungus was screened according to the decolorization rate of disperse blue. The fungus was identified and named *Aspergillus* XJ-2 on the basis of its morphological characteristics and 18s rDNA. Response surface method was used to optimize culture conditions for *A.* XJ-2. The optimum values of obtained responses were as follows: temperature, 35 °C; pH, 5.2; carbon-to-nitrogen ratio, 30:5.5; and rotation ratio, 175 r·min⁻¹. Under optimized conditions, the decolorization rate of *A.* XJ-2 was up to 94.8% in 48 h.

Key words: Anthraquinone Dye, Decolorization, Fungi, Wastewater, Response Surface Method

1. Introduction

A large amount of chemically different synthetic dyes are widely used in the textile and dyestuff industries for textile dyeing, paper printing, food packing, pharmaceutical and color photography [1,2]. Residue dyes in industrial wastewater affect the aesthetic quality, transparency, and gas solubility of water bodies because of their strong color and highly fluctuating pH [3]. Residue dyes have an adverse impact on water bodies in terms of biological oxygen demand (BOD) [4]. Moreover, the most familiar synthetic dyes, such as azo, anthraquinone dyes, and/or their degradation products, are toxic and potentially carcinogenic once released into the environment [5-7]. Compared with azo-based dyes, anthraquinone dyes are more resistant to biodegradation because of their fused aromatic structures, which may significantly affect photosynthetic activity in aquatic life [8,9]. Therefore, anthraquinone dye removal has particularly attracted scientific attention.

A wide range of treatment methods have been used for dye removal from wastewaters. Advanced oxidation processes, chemical or electrochemical precipitation [10], and adsorption [11] have been used for color removal from effluent. However, these treatment methods have inherent drawbacks of high operating costs, as well as being economically unfeasible (owing to their requirement for a large amount of energy and chemicals) and the production of abundant sludge, which results in waste disposal problems [4,12].

Biological treatment for dye removal from wastewater is one of

the most widely used methods. The bio-decolorization of dyes is mainly completed by bacteria, such as *Pseudomonas*, *Shewanella*, *Rhizobium*, and *Radiobacter* [13,14], some of which fail to degrade anthraquinone dyes completely. Given that some intermediate products, such as aromatic amines, are more toxic than initial substrates, further decomposition is required [15]. Therefore, pure fungal cultures have attracted considerable attention relative to the development of bioprocesses for the mineralization of anthraquinone dyes and the degradation of pollutants because of their extracellular, nonspecific, high physical and enzymatic tolerance for high concentrations of toxicants [16,17].

Some fungi, especially white-rot fungi, appear quite effective in achieving removal rates as high as 40–88% for COD, 60–100% for phenolics, and 45–80% for synthetic dyes [18,19].

In this work, one fungus was screened to remove anthraquinone dyes from simulated wastewater. Decolorization conditions were optimized by response surface methodology (RSM), which is a powerful tool for optimizing the interactions of estimated parameter effects that could reduce the number of experiments to be undertaken [13,20].

2. Material and Methods

2-1. Materials

Samples, which were used to separate the microorganism, were obtained from plant biochemical treatment pool sludge and the surrounding soil of a cotton textile factory in Shihezi. Disperse blue, an anthraquinone dye, was also provided by this factory. The molecular formula of this dye is shown in Fig. 1.

Czapek medium contained 2 g of NaNO₃, 1 g of K₂HPO₄, 0.5 g of KCl, 0.5 g of MgSO₄, 0.01 g of FeSO₄, 30 g of glucose, and 1 L

[†]To whom correspondence should be addressed.

E-mail: xxl_food@shzu.edu.cn

This is an Open-Access article distributed under the terms of the Creative Commons Attribution Non-Commercial License (<http://creativecommons.org/licenses/by-nc/3.0>) which permits unrestricted non-commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.




Fig. 1. The molecular formula of disperse blue.

of distilled water at pH 7.3 ± 0.2 . Meanwhile, the solid screening medium comprised agar and disperse blue at a 20 mg/L concentration added to Czapek medium.

Simulated wastewater consisted of Czapek medium, adding disperse blue of 20 mg/L.

2-2. Screening of decolorizing microorganism

Samples were diluted and spread on a solid screening plate and left to stand for 2 d at 37 °C. Mycelia on the plate were extracted and placed in simulated wastewater. Culture conditions were 100 ml medium in a 250 ml flask at 37 °C with shaking at $150 \text{ r} \cdot \text{min}^{-1}$ for 48 h. The decolorization rates of microbes were determined after 48 h. The microbe with the maximum decolorization rate was selected as the target microorganism.

2-3. Determination of decolorization rate

The maximum absorbent wavelength of disperse blue was 567 nm. Supernatants, which were extracted with equal volume of ethyl acetate at different culture times, were used to detect the absorbance value at 567 nm. The decolorization rate of each sample was calculated according to the following formula:

$$\text{Decolorization rate (\%)} = (A-B) / A \times 100\% \quad (1)$$

A: absorbance value of supernatant before inoculation; and
B: absorbance value of supernatant after being cultured;

2-4. Identification of decolorizing microorganism

The decolorizing microbe was identified on the basis of its morphological characteristics and 18S rDNA. The colony characteristic of the strain was observed in the plate. The micro morphological characteristics of the decolorizing microorganism were examined by scanning electron microscopy (JSM-6490LV, Japan) and a Primo Star optical microscope (ZEISS, Germany). The fungi were identified on the basis of 18S rDNA homology. A phylogenetic tree was constructed by using the National Centre for Biotechnology Information BLAST service and Molecular Evolutionary Genetics Analysis software with the neighbor-joining method [21].

2-5. Optimization of decolorization conditions with RSM

The statistical software DX8.0 central composite rotatable set

Table 1. Response surface experiment design

level	Temperature (X_1)	Rotational speed (X_2)	pH (X_3)	C:N (X_4)
-2	31 °C	130 r/min	4.0	30:2
-1	33 °C	150 r/min	4.5	30:3
0	35 °C	170 r/min	5.0	30:4
1	37 °C	190 r/min	5.5	30:5
2	39 °C	210 r/min	6.0	30:6

(Central composite rotatable design, CCRD) was used to optimize culture conditions. Based on the results of single-factor experiments (data not shown), four design factors were selected: temperature, rotational speed, pH of original medium and carbon-to-nitrogen ratio. The design factors levels were coded -2 (low), 0 (central point), and +2 (high) (Table 1). Decolorization rate was optimized as a response. The dependence of the response, Y , on the design factors $X_1 \dots X_n$, is described by Eqs. (2, 3).

3. Results and Discussion

3-1. Screening of decolorizing microorganism

First, a screening step was performed. Microbes that could grow on solid screening medium were rescreened according to their decolorizing capability in simulated wastewater. One fungus (numbered XJ-2) with the maximum decolorizing rate (data not shown) was chosen as the target microbe. The decolorization rate was investigated throughout the growth of XJ-2. Results are shown in Fig. 2. Disperse blue was significantly decolorized at the logarithmic phase (approximately 5-33 h) of XJ-2. The highest decolorization rate reached 88.4% at the stationary phase (growing time of 33-59 h).

3-2. Identification of decolorizing microorganism

The morphological characteristics of XJ-2 in the plate presented a loose structure with the separated vegetative hyphae, having a

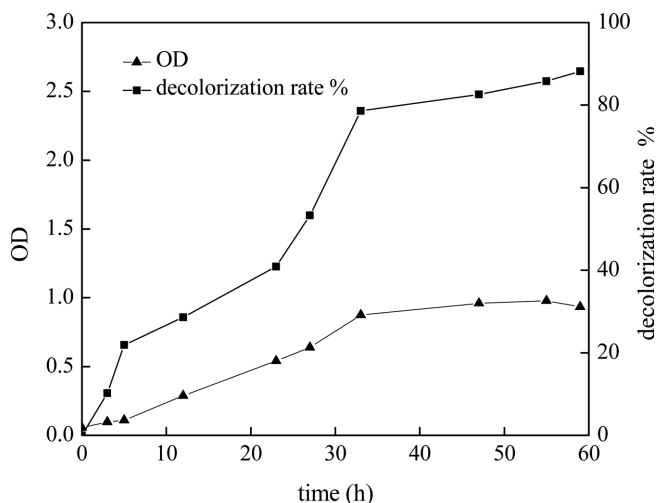


Fig. 2. Growth curve and decolorization rate of XJ-2.

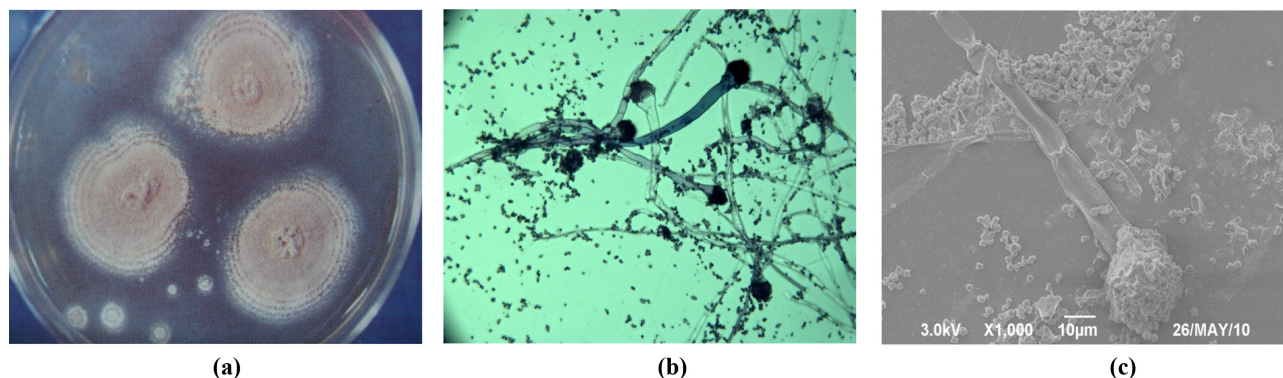


Fig. 3. Morphological characteristics of XJ-2 (a, Colony; b, Micrograph (400×); c, SEM images).

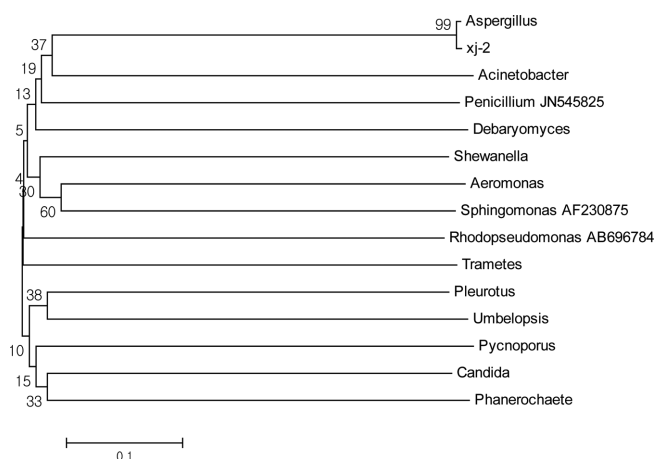


Fig. 4. Phylogenetic tree of decolorizing Microorganism.

surface of grayish green. Electronic microscopic observation showed that part of the aerial hyphae formed some long and rough conidiospores, at the top of which a nearly spherical shape or flask vesicle was produced. Numerous small terriers (usually double) were generated by the spherical surface rough conidiospore (Fig. 3). That is, XJ-2 could belong to *Aspergillus* according to its morphological characteristics. The microbe was further identified by 18s rDNA. The phylogenetic tree (Fig. 4) depicted that the sequence of XJ-2 matched the selected sequence from the GenBank database with 99% sequence identity. According to the homologous sequence, the microorganism was identified and named *Aspergillus* XJ-2 (*A.* XJ-2).

3-3. Optimization of culture conditions with RSM

3-3-1. CCRD design for conditions optimization.

From single-factor experiments, the pH of the original medium, growth temperature, carbon-to-nitrogen ratio, and rotation speed were selected as factors in the central composite experimental design (Table 1).

For statistical calculations, temperature (X_1), rotation speed (X_2), pH (X_3) and carbon-to-nitrogen ratio (X_4) were converted using the following equation:

$$x_i = (X_i - X_0) / \delta X \quad (2)$$

where X_0 is the value of X_i at the center point, and δX presents the step of variables. Among 30 test points, 24 groups were the factorial experiments, and the other six groups were the center of test. The test was repeated six times to estimate the test error. Through response surface analysis, results of the wastewater decolorization rate of *A.* XJ-2 are presented in Table 2.

Polynomial fitting regression was performed, with decolorization rate (Y) as the dependent variable and temperature (X_1), rotation speed (X_2), pH (X_3), and carbon-to-nitrogen ratio (X_4) as independent variables. The regression equation was established as follows:

$$Y = 0.92088 + 0.048000 x_1 + 0.020444 x_2 + 0.023944 x_3 + 0.012889 x_4 + 0.012125 x_1 x_2 - 0.021625 x_1 x_3 + 0.005 x_1 x_4 + 0.007125 x_2 x_3 - 0.019750 x_2 x_4 - 0.010500 x_3 x_4 - 0.0104221 x_1 x_1 - 0.00842105 x_2 x_2 - 0.022921 x_3 x_3 - 0.083421 x_4 x_4 \quad (3)$$

Reliability analysis of the regression equation indicated that the experimental data of the model had high reliability with R^2 of 88.58% and could thus be used to explain and illustrate the model. A lower value of CV indicated better stability of experiments. In sum, the regression equation was a good model for optimizing decolorization conditions of *A.* XJ-2.

3-3-2. Response analysis and interpretation

ANOVA of results was performed using DX 7 program 7.0, and the analysis results are shown in Table 3. Varieties X_1 and $X_4 X_4$ showed high significance in terms of decolorization rate. Varieties X_2 , X_3 , and $X_1 X_3$ significantly affected decolorization rate. Table 3 also explains the relationship between varieties and decolorization rate. A higher F value of variety results in a more pronounced effect on decolorization rate. Temperature shows an extremely significant effect on decolorization rate ($P < 0.01$).

According to the fitting function, the contour maps were plotted on each of the two factors associated with decolorization rate. When considering the relationship between the qualitative analysis of various factors and decolorization rate, two other factors were fixed, both with the "0" level of processing. Results are shown in Fig. 5. Temperature relative to decolorization rate impact is the

Table 2. The 4-factors Central composite design matrix and the value of response function (%)

Test	Temperature X_1 (°C)	Rotational speed X_2 (r/min)	pH X_3	C:N X_4 (W:W)	Decolorization rate (%) Y	
					Experimental	Predicted
1	1	1	-1	1	86.1	85.6
2	0	0	-1	0	85.4	87.3
4	-2	0	0	0	89.2	86.5
5	1	1	1	1	86.1	85.4
6	1	-1	-1	-1	85.4	83.6
7	0	0	0	-2	83.1	82.8
8	1	-1	1	1	89.2	86.3
9	0	0	0	1	80.5	85.5
10	0	-2	0	0	88.5	89.1
11	-1	1	1	-1	84.2	73.8
12	-1	-1	-1	-1	60.8	64.9
13	-1	-1	-1	1	74.1	71.4
14	-1	1	-1	-1	72.3	73.2
15	0	0	0	0	96.8	92.2
16	2	0	0	0	89.5	96.3
17	1	-1	1	-1	80.9	80.7
18	1	1	1	-1	87.6	87.2
19	-1	1	1	1	84.8	81.4
20	0	0	0	0	93.4	92.5
21	-1	1	-1	1	70.2	73.9
22	1	-1	-1	1	88.3	89.2
23	0	2	0	0	90.1	93.4
24	-1	-1	1	1	73.2	77.3
25	-1	-1	1	-1	76.1	76.8
26	1	1	-1	-1	78.3	79.4
27	0	0	0	0	94.9	92.3
28	0	0	0	0	91.4	92.2
29	0	0	2	0	85.8	92.2
30	0	0	0	0	94.5	92.5

Table 3. Regression analysis results

Sources of variation	df	SS (Sum of squares)	MS (Mean squar)	F (F-value)	Pr> F (Prob>Fp-value)	
X_1	1	0.041	0.041	25.67	0.0001	
X_2	1	7.524E-003	7.524E-003	4.66	0.0476	
X_3	1	0.010	0.010	6.39	0.0232	
X_4	1	2.990E-003	2.990E-003	1.85	0.1938	
X_1X_1	1	2.814E-004	2.814E-004	0.17	0.6824	
X_1X_2	1	2.352E-003	2.352E-003	1.46	0.2463	
X_1X_3	1	7.482E-003	7.482E-003	4.63	0.0481	
X_1X_4	1	4.000E-004	4.000E-004	0.25	0.6260	
X_2X_2	1	1.837E-004	1.837E-004	0.11	0.7406	
X_2X_3	1	8.123E-003	8.123E-003	0.50	0.4892	
X_2X_4	1	6.241E-003	6.241E-003	3.86	0.0682	
X_3X_3	1	1.361E-003	1.361E-003	0.84	0.3732	
X_3X_4	1	1.764E-003	1.764E-003	1.09	0.3126	
X_4X_4	1	0.018	0.018	11.16	0.0045	
model	14	0.18	0.013	7.88	0.0001	Significant
Lack of fit	10	0.023	2.257E-003	6.78	0.0238	
pure error	5	1.665E-003	3.331E-003			
Total deviation	29	0.2				

most significant and exhibits steep performance curves. The effects of temperature, rotation speed, and pH on decolorization are evi-

dent. Contour shape could reflect the interaction strength. The contour shows that the interaction between temperature and pH was

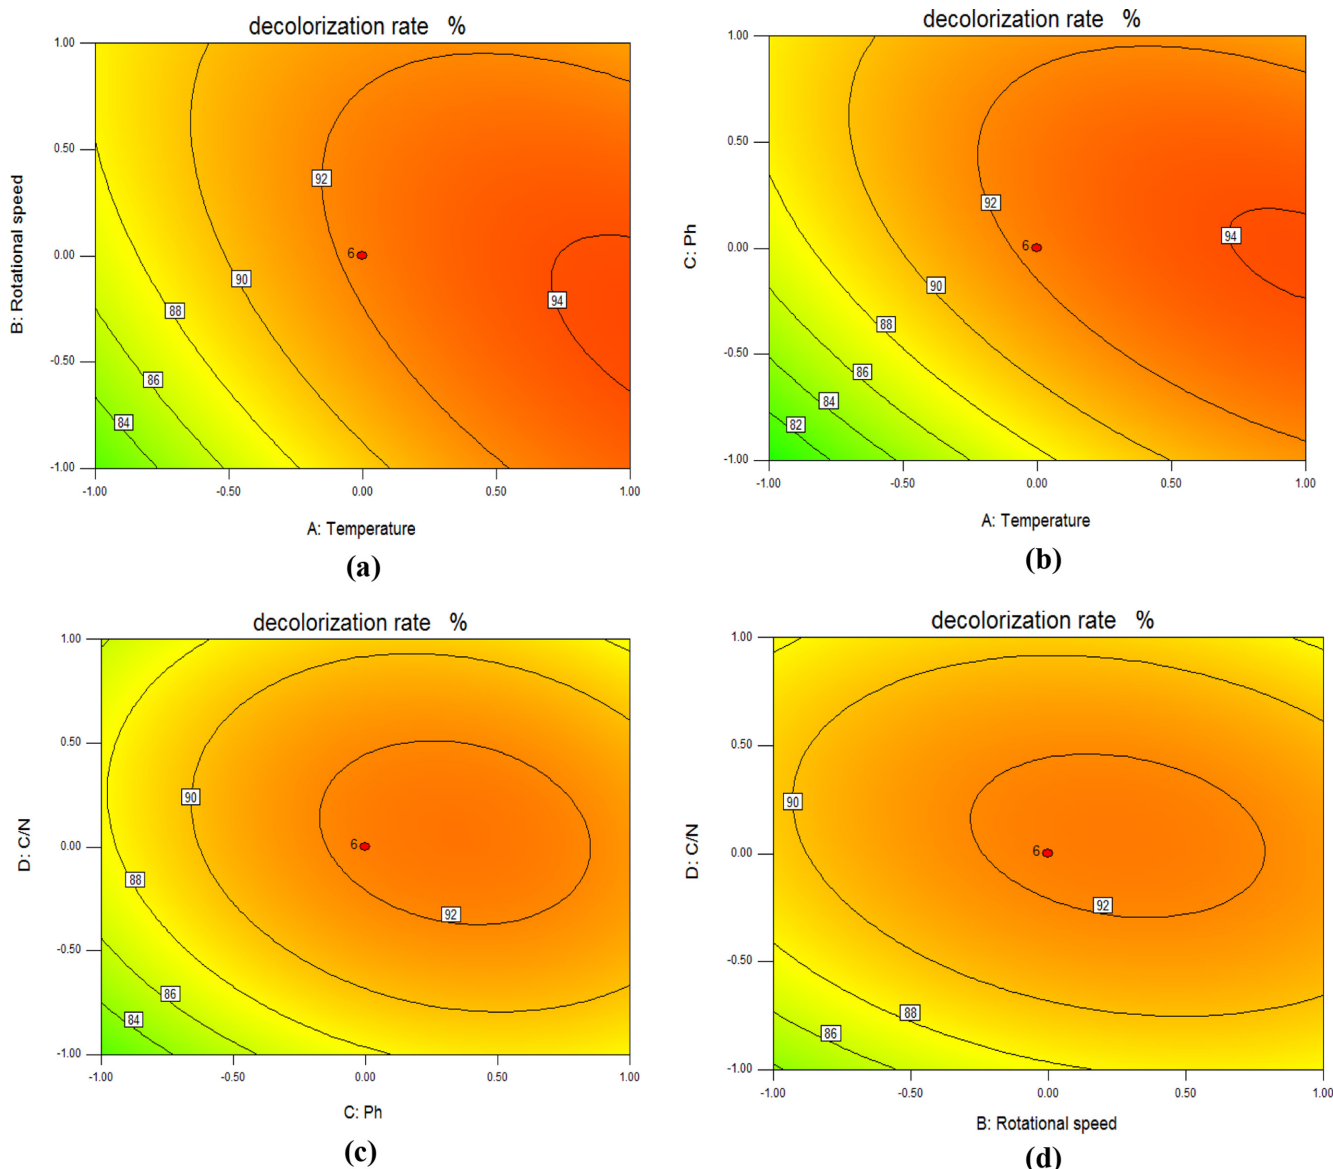


Fig. 5. Interaction of various factors under the analysis of response surface and contour map ((a) the $Y = f(X_1, X_2)$ response surface and contour analysis diagram, (b) the $Y = f(X_1, X_3)$ response surface and contour analysis diagram, (c) the $Y = f(X_2, X_3)$ response surface and contour analysis diagram, (d) the $Y = f(X_2, X_4)$ response surface and contour analysis diagram).

significant (Fig. 5a).

3-4. Optimization results

The optimum conditions of the regression model in relation to the microorganism and wastewater decolorization were predicted as follows: temperature, 34.9 °C; rotation speed, 177 $\text{r}\cdot\text{min}^{-1}$; pH, 5.2; and carbon-to-nitrogen ratio, 30:5.6. The theoretical decolorization rate of wastewater reached 95.7%. To test the reliability of RSM, the optimized decolorization conditions for wastewater were considered as: temperature, 35 °C, rotation speed, 175 $\text{r}\cdot\text{min}^{-1}$; pH, 5.2; and carbon-to-nitrogen ratio, 30:5.5. The actual decolorization rate of *A. XJ-2* was 94.8% in 48 h, which was slightly lower than the theoretical decolorization rate of 95.7%, under optimized conditions. This finding might be attributed to the mutual effects on

decolorization rate under actual operation conditions [18,22].

High decolorization efficiency is preferred for actual wastewater treatment. As shown above, the decolorization rate of *A. XJ-2* increased from 88.4% to 94.8% after the conditions were optimized by RSM, and decolorization time was decreased from 59 h to 48 h. The decolorization capability of *A. XJ-2* within certain time was improved with RSM. This finding suggests that *A. XJ-2* has potential for field applications.

Some other fungi, such as *Phanerochaete chrysosporium*, *Pleurotus*, *Pycnoporus coccineus*, and *Lentinula*, were also considered for the complete decolorization of anthraquinone dyes in industrial textile wastewater dyes. Approximately 40% COD and 50% color were degraded by *Pycnoporus coccineus* under culture conditions of 30 °C for 21 d [19]. By contrast, *XJ-2* showed high decoloriza-

tion efficiency, achieving a decolorization rate of up to 94.8% in 48 h. Moreover, XJ-2 could grow and decolorize when the carbon-to-nitrogen ratio of the medium was zero and the unique source of N was from dyes. More experiments are needed to prove this phenomenon in future research.

4. Conclusions

Fungi's ability to decolorize dye wastewater has been reviewed. The extensive research devoted to various fungi show that they are emerging as a promising alternative to some old treatment systems. One fungus was screened and identified as *Aspergillus* XJ-2 with good decolorization rate in this work also. Response surface methodology was one useful method to optimize the condition of decolorization rate. And the promising result obtained from it (more than 94.8% decolorization rate in 48 h) led us to study more about decolorization of Anthraquinone dye with *A. XJ-2*.

Acknowledgments

This work sponsored by the Fund of High-level Personnel from Shihezi University (NO. RCZX201121) is highly acknowledged, and authors are grateful to the environmental department research group for providing advice.

Nomenclatures

XJ-2	: <i>Aspergillus</i> XJ-2
RSM	: Response Surface Methodology
BOD	: Biological oxygen demand
COD	: Chemical oxygen demand
NCBI	: National Centre for Biotechnology Information
CCRD	: Central Composite Rotatable Design
CV	: Coefficient of Variation
ANOVA	: Analysis of Variance

References

1. E. Sayan and M. E. Edecan, *Ultrason. Sonochem.*, **15**, 530 (2008).
2. D. P. Garcia, J. C. Francisco and B. Germán, *J. Hazard. Mater.*,

3. G. Chen, M. H. Huang, L. Chen and D. H. Chen, *Int. Biodeterior. Biodegrad.*, **65**, 790 (2011).
4. R. G. Saratale, G. D. Saratale, J. S. Chang and S. P. Govindwar, *J. Taiwan. Inst. Chem. Eng.*, **42**, 57 (2011).
5. S. Asad, M. A. Amoozegar, A. A. Pourbabae, M. N. Sarbolouki and S. M. M. Dastgheib, *Bioresour. Technol.*, **98**, 2082 (2007).
6. K. S. Rim, T. Mechichi, S. Sayadi and A. Dhoub, *J. Microbiol.*, **50**, 226 (2012).
7. X. K. Zeng, Y. J. Cai, X. R. Liao, X. L. Zeng, S. P. Luo and D. B. Zhang, *Process. Biochem.*, **47**, 160 (2012).
8. A. Srinivasan and V. Thiruvengkatachari, *J. Environ. Manage.*, **91**, 1915 (2010).
9. F. J. Deive, A. Dominguez, T. F. Barrio, Moscoso, P. Moran and M. A. Longo, *J. Hazard. Mater.*, **182**, 735 (2010).
10. I. A. Alaton, I. Kabdasli, B. Vardar and O. Tunay, *J. Hazard. Mater.*, **150**, 166 (2008).
11. M. Ožacar and I. A. Sengil, *J. Hazard. Mater.*, **98**, 211 (2003).
12. K. Papadopoulou, I. M. Kalagona, A. Philippoussis and F. Rigas, *Int. Biodeterior. Biodegrad.*, **77**, 31 (2013).
13. D. M. Cao, X. Xiao, Y. M. Wu, X. B. Ma, M. N. Wang, Y. Y. Wu and D. L. Du, *Bioresour. Technol.*, **136**, 176 (2013).
14. X. M. Meng, G. F. Liu, J. T. Zhou and Q. S. Fu, *Bioresour. Technol.*, **151**, 63 (2014).
15. Y. Y. Qu, S. G. Shi, F. Ma and B. Yan, *Bioresour. Technol.*, **101**, 8016 (2010).
16. Y. Y. Su, Y. F. Zhang, J. Wang, J. T. Zhou, X. B. Lu and H. Lu, *Bioresour. Technol.*, **100**, 2982 (2009).
17. L. J. Zhao, J. T. Zhou, Y. H. Jia and J. F. Chen, *J. Hazard. Mater.*, **181**, 602 (2010).
18. M. Karatas, Y. A. Argun and M. E. Argun, *J. Ind. Eng. Chem.*, **18**, 1058 (2012).
19. M. Neifar, A. Jaouani, M. J. Martínez and M. J. Penninckx, *J. Microbiol.*, **50**, 746 (2012).
20. A. R. Khataee, M. Zarei, M. Fathinia and M. Khobnasab Jafari, *Desalination*, **268**, 126 (2011).
21. M. S. Ferhan, N. I. Santos, S. N. Melo and Y. M. Sain, *World. J. Microb. Biot.*, **29**, 2437 (2013).
22. X. C. Jin and Y. Ning, *J. Hazard. Mater.*, **26**, 2870 (2013).