

## Container System Actively Maintaining High CO<sub>2</sub> Concentration for Improved Sensory Quality of *Kimchi*

Hye Lim Lee<sup>1</sup>, Duck Soon An<sup>1</sup>, Yong Bae Jung<sup>2</sup>, and Dong Sun Lee<sup>1\*</sup>

<sup>1</sup>Department of Food Science and Biotechnology, Kyungnam University, Changwon 51767, Korea

<sup>2</sup>SCHN Technology Inc., Changwon 51347 Korea

**Abstract** A *kimchi* container actively controlling CO<sub>2</sub> concentration by timely flushing of CO<sub>2</sub> gas was structured and tested in its capability and effectiveness because high CO<sub>2</sub> concentration enhances the sensory flavor of the product. The inlet and outlet valves of CO<sub>2</sub> gas were programmed to open and close allowing synchronous vent/CO<sub>2</sub> flush according to the requirements of its dissolution in the contained *kimchi*. During the chilled storage, the headspace of container could be maintained at desired high CO<sub>2</sub> concentration providing the preferred *kimchi* in sensory quality compared to control of the conventional container. However, there was no significant difference between the high CO<sub>2</sub> container and control (container simply closed with air) in *kimchi* quality attributes of pH, titratable acidity, total viable bacterial count, *Lactobacillus* sp. count and *Leuconostoc* sp. count. The flow rate and time interval of CO<sub>2</sub> flushing need to be adjusted considering the *kimchi* amount, headspace volume and ripening time. The designed system has potential to be applied in refrigerator appliances in homes and food service industry.

**Keywords** Lactic acid fermented food, Active control, Carbon dioxide, Sensory quality, Modified atmosphere

### Introduction

*Kimchi*, a Korean major fermented vegetable, has unique quality characteristics which is dynamic with storage time due to activity of contained live lactic acid bacteria. The quality is also determined by the flavor and CO<sub>2</sub> gas produced by the on-going fermentation. The quality and organoleptic properties of *kimchi* have been reported to benefit from high CO<sub>2</sub> atmospheric conditions<sup>1</sup>. In Korean household, plastic or metal containers are widely used for storing *kimchi*. During the storage, the containers are opened and closed many times to take out part of the product. Maintaining high CO<sub>2</sub> concentration in the container all through these behavioral procedures is expected to be helpful for sensory preference of *kimchi*. Thus the container design to allow intermittent CO<sub>2</sub> gas supply has a potential to be applied for the household storage of *kimchi* in refrigerator. Nowadays some refrigerators are equipped with small CO<sub>2</sub> gas cylinder to make carbonated water and thus the *kimchi* container system may use it for CO<sub>2</sub> supply to keep the high CO<sub>2</sub> concentration inside.


Therefore, this study aims to develop a *kimchi* container system able to actively modify the container atmosphere and keep high CO<sub>2</sub> concentration beneficial for consumer preference. Way to consistently maintain high CO<sub>2</sub> was implemented stepwise.

### Materials and Methods

#### 1. *Kimchi* container system and storage trial

As the first step for developing the *kimchi* container system to keep the internal CO<sub>2</sub> concentration at high level, a structure was conceptualized as shown in Fig. 1. To the headspace of the container, CO<sub>2</sub> gas was designed to flow inward through a gas inlet valve from a small CO<sub>2</sub> cylinder and a gas outlet valve was synchronized with inlet valve in its opening and closing, which helped to flush it at normal atmospheric pressure. The repetitive vent/CO<sub>2</sub> flush operations could be directed or varied by opening/closing actuation of the inlet and outlet valves programmed in the control board. In realizing the concept, 10 L polypropylene container (32 × 25 × 18 cm with a wall thickness of 2 mm) was fabricated with installation of inlet and outlet valves of solenoid type (diameter of 3 mm and length of 4 cm). The inlet valve was connected to CO<sub>2</sub> gas cylinder and outlet was open to the atmosphere. Their opening and closing were synchronized in order to flush the container and avoid the overpressure inside the container.

\*Corresponding Author : Dong Sun Lee  
Department of Food Science and Biotechnology, Changwon 51767, Korea  
Tel : +82-55-249-2687  
E-mail : dongsun@kyungnam.ac.kr

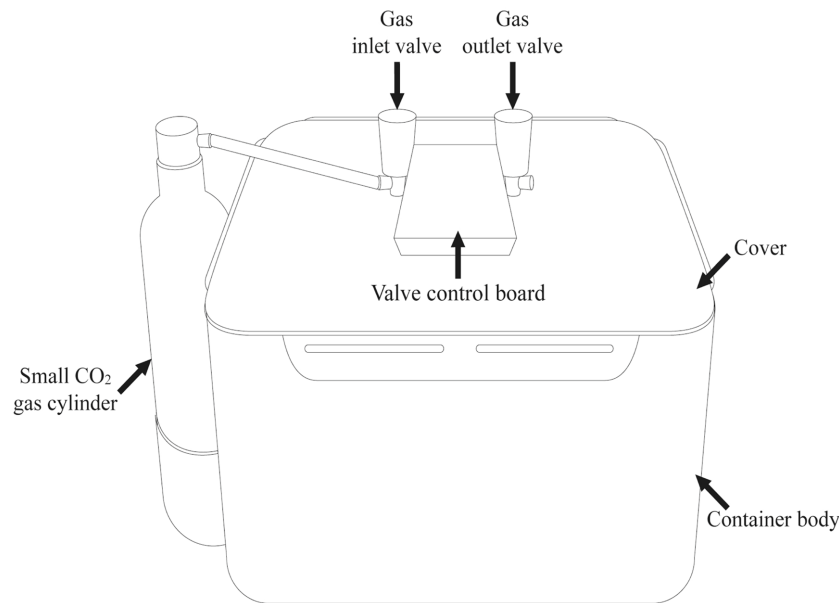

**Fig. 1.** Kimchi container system for keeping the internal CO<sub>2</sub> concentration at high level by vent/CO<sub>2</sub> flush method.

As the first trial to test a vent/CO<sub>2</sub> flush concept preliminarily, 7 kg *kimchi* prepared (with Chinese cabbages of 5 × 5 centimeter) at Ungcheon Agricultural Cooperative (Changwon, Korea) was used for the experiment after immediately transferred to the laboratory. The salt concentration of the product measured by Salt Meter (Model TM-301, Takemura Electric Work Ltd., Tokyo, Japan) was 3.0%. The container was flushed with high CO<sub>2</sub> concentration (higher than 80% at normal atmospheric pressure, i.e., above 0.8 atm in partial pressure) condition initially and then stored at 7°C. In the course of storage, the container was opened to take out 2 kg of *kimchi* sample at two different times following the common consumer behavior in the household and then closed again to be flushed to the condition of high CO<sub>2</sub> concentration (higher than 80% at normal atmospheric pressure or above 0.8 atm in partial pressure). After 14 days of the storage, the container was opened to examine the final quality of *kimchi*. Control container of non-flushed atmosphere was filled initially with 7 kg and subjected to the same storage and sample removal conditions for comparison purpose. Samples taken out each time corresponded to the state of under-ripened (0.2-0.6% of total acidity), optimal-ripened (0.6-0.8 of acidity) and over-ripened (acidity above 0.8%) *kimchi*<sup>2,3</sup>. Container gas concentration in partial pressures of CO<sub>2</sub>, O<sub>2</sub> and N<sub>2</sub> was measured by a gas chromatograph (Varian CP3800, Palo Alto, CA, USA) for the gas sample of 1 mL taken from the headspace through silicon sampling port by gas-tight syringe. The gas chromatograph had been equipped with Alltech CTR I Column (Alltech Associates, Inc., Deerfield, IL, USA) and a thermal conductivity detector. The *kimchi* samples taken out from the con-

tainer were measured in pH, acidity, microbial counts and sensory flavor.

Based on the results from the first trial of simple vent/CO<sub>2</sub> flushing, a patterned CO<sub>2</sub> flushing in pre-set time schedule (time-controlled vent/CO<sub>2</sub> flushing) was devised and applied to the same container filled with 8 kg *kimchi* (salt content: 2.4%). Initial flushing at flow rate of 2.4 L/min was applied for 2.5 minutes and then periodical flushing during the subsequent storage at 5°C was executed for 50 seconds at the same flow rate every 6 hours before reaching the state of optimum ripening. At the state of optimum *kimchi* ripening, the container was opened to take out 3 kg of *kimchi* simulating the consumer behavior and then closed again with the CO<sub>2</sub> flushing same as the initial one. The flushing was applied for 5 minutes considering the increased headspace. The flushing time interval was changed to 12 hours after the state of optimum ripening because slighter CO<sub>2</sub> flow was enough to maintain the high CO<sub>2</sub> concentration in the container due to high amount of CO<sub>2</sub> already dissolved in the contained *kimchi*. Control container of normal air without CO<sub>2</sub> flushing was given to the same storage and procedure of its opening and *kimchi* removal. During the storage, container's CO<sub>2</sub> gas concentration was measured by a gas analyzer (Checkmate 3, PBI Dansensor, Ringsted, Denmark). *Kimchi* taken out from the container was submitted to the measurement of quality attributes.

## 2. Measurement of *kimchi* quality attributes


Quality attributes of pH, titratable acidity and microbial counts of total viable bacteria, *Lactobacillus* and *Leuconostoc*

species were measured for *kimchi* liquid taken also from the product in the container. The pH of the *kimchi* brine was measured by an Orion Model 920A pH Meter (Orion Research Inc., Boston, USA). The acidity was determined in lactic acid concentration by titrating 5 g of *kimchi* brine sample with 0.1 N NaOH until pH 8.1 of end point was attained. Counting procedures for total viable organisms, *Lactobacillus* and *Leuconostoc* species were carried out for the liquid sample diluted with 0.05% (w/v) peptone water in accordance with the method of Lee and Paik<sup>4</sup>. Total viable bacteria were enumerated using plate counting agar (PCA; Becton, Dickinson and Company, Sparks, NV, USA) plates incubated for 3 days at 30°C. *Lactobacillus* and *Leuconostoc* species were enumerated on Lactobacilli MRS agar (Becton, Dickinson and Company, Sparks, NV, USA) supplemented with 0.002% bromophenol blue by incubating for 3 days at 25°C. The distinct color discernible in the colony (white or bright blue color for *Lactobacillus* and dark blue color for *Leuconostoc*) on the agar plate was assisted in the counting of the species. The microbial count was expressed in colony forming unit (CFU) per mL of *kimchi* solution. All the data are the averages of three samples at least. In a separate experiment, hedonic flavor score was assessed for the *kimchi* samples by 6 or 7 panel members. Score scale allocated was from 1 to 5 for the first trial while the scale from 1 of 'extremely unpleasant' to 7 of 'extremely pleasant' was used in the second trial. Statistical significance of difference between the treatments was evaluated by t-test function in Microsoft Excel<sup>®</sup>.

## Results and Discussion

### 1. Container system with simple vent/CO<sub>2</sub> flushing

When CO<sub>2</sub> gas was flushed into the container up to high CO<sub>2</sub> concentration initially or after the time of opening the container (above 0.83 atm), the CO<sub>2</sub> concentration decreased continuously during the subsequent storage in Fig. 2B. The rate and magnitude of CO<sub>2</sub> concentration decrease were higher at earlier storage time (down to 0.63 atm at 3.0 day, 0.73 atm at 6.0 day and 0.89 atm at 13.9 day) probably because there was higher amount of *kimchi* un-ripened in the container during initial storage. High solubility of CO<sub>2</sub> in aqueous or fatty foods is well known and works for beneficial effect sometimes<sup>5,6</sup>. Thus the flushed CO<sub>2</sub> gas would have been dissolved into aqueous part of *kimchi*. In the last part of storage (after 6.9 day with *kimchi* acidity of 0.64% according to Table 1), the decrease of headspace CO<sub>2</sub> concentration with time was negligible, which indicated that no further CO<sub>2</sub> dissolution into *kimchi* did occur. Even with the decrease of CO<sub>2</sub> concentration, the flushed container maintained CO<sub>2</sub> partial pressure above 0.63 atm through the whole storage time. On the other hand, the CO<sub>2</sub> concentration in control container increased slowly and persistently with time; the rate and

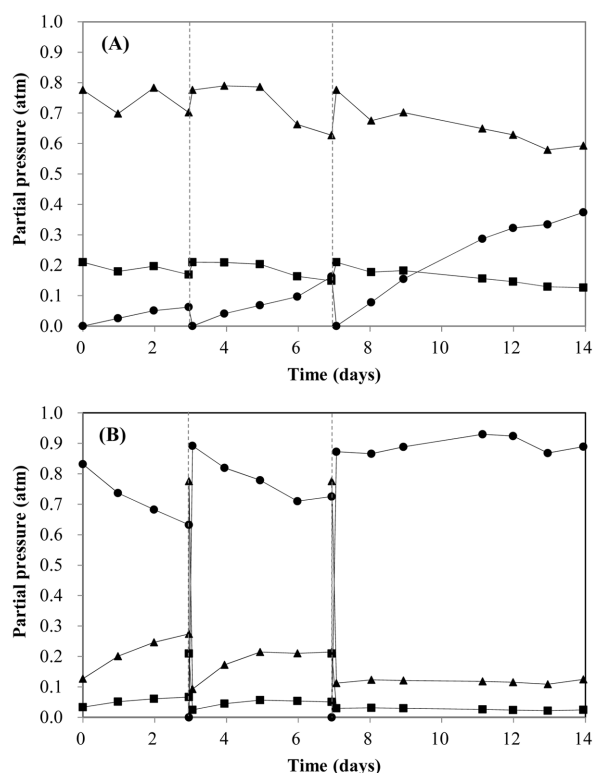

**Fig. 2.** Atmosphere profile in 10 L control container (A) or vent/CO<sub>2</sub> flush container (B) containing 7 kg *kimchi* at 7°C. Vertical dotted bars represent the time of *kimchi* take-out. ●, CO<sub>2</sub>; ■, O<sub>2</sub>; ▲, N<sub>2</sub>.


degree of increase were higher in the later storage part (up to 0.06 atm at 3.0 day, 0.16 atm at 6.9 day and 0.37 atm at 13.9 day) (Fig. 2A). The higher CO<sub>2</sub> concentration in the control container at the later storage period (3 kg remaining after taking out the *kimchi* twice) compared to initial part was presumed to be caused by the combination of fermentation activity and CO<sub>2</sub> release from the fully fermented *kimchi* with high dissolved CO<sub>2</sub>, which would have been determined by equilibration relation<sup>7</sup>.

Container with the simple vent/CO<sub>2</sub> flush mechanism experiencing high CO<sub>2</sub> concentration resulted in significantly better sensory flavor after optimal ripening (6.9 days of acidity 0.64% and 13.9 days of acidity 1.19%), but not in the un-ripened state (3.0 days of acidity 0.32%), compared to control treatment (Fig. 3). Beneficial effect of high CO<sub>2</sub> packaging on sensory flavor of optimally ripened *kimchi* was reported elsewhere<sup>1</sup>. High CO<sub>2</sub> partial pressure or concentration would have resulted in high content of the dissolved CO<sub>2</sub> in the product and thus better fresh cool taste. High dissolved CO<sub>2</sub> in the food product has been reported to give sparkling taste<sup>8,9</sup>. However, the different container atmosphere observed in Fig. 2 did not affect the chemical and microbial quality of *kimchi* prod-

**Table 1.** Change of the ripening attributes of *kimchi* (salt 3.0%) stored in the container system at 7°C

Container*	Attribute	Time (days)			
		0	3.0	6.9	13.9
Control	pH	5.27 ± 0.03	5.59 ± 0.00	4.41 ± 0.02	4.00 ± 0.07
	Acidity (%)	0.46 ± 0.00	0.32 ± 0.00	0.64 ± 0.01	1.19 ± 0.00
	Microflora (log(CFU/mL))				
	Total viable bacteria	6.28 ± 0.14	6.95 ± 0.06	9.18 ± 0.04	9.74 ± 0.05
	<i>Lactobacillus</i> sp.	5.42 ± 0.27	6.28 ± 0.11	8.15 ± 0.14	9.86 ± 0.08
	<i>Leuconostoc</i> sp.	6.03 ± 0.14	7.15 ± 0.10	9.25 ± 0.00	8.36 ± 0.32
Vent/CO <sub>2</sub> flush	pH	5.27 ± 0.03	5.62 ± 0.01	4.44 ± 0.02	4.06 ± 0.01
	Acidity (%)	0.46 ± 0.00	0.31 ± 0.01	0.71 ± 0.01	1.19 ± 0.00
	Microflora (log(CFU/mL))				
	Total viable bacteria	6.28 ± 0.14	7.02 ± 0.13	9.18 ± 0.03	9.74 ± 0.29
	<i>Lactobacillus</i> sp.	5.42 ± 0.27	6.55 ± 0.17	8.14 ± 0.06	9.97 ± 0.05
	<i>Leuconostoc</i> sp.	6.03 ± 0.14	7.14 ± 0.18	9.23 ± 0.08	8.40 ± 0.17

\*For the container atmosphere, refer to Fig. 2.

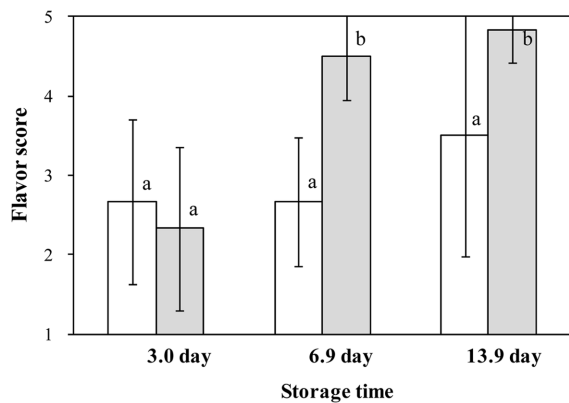


**Fig. 3.** Sensory flavor score of *kimchi* compared between treatments given in Fig. 2 at different ripening stages (n=6). □: control, ■: vent/CO<sub>2</sub> flush container. Scale range is from 1 to 5. The different letters for the bars of the flavor scores indicate significant differences between the treatments ( $p \leq 0.05$ ).

uct significantly (Table 1). While some researchers reported that modified atmosphere of high CO<sub>2</sub>/low O<sub>2</sub> contributed to good survival of probiotic bacteria<sup>10, 11</sup>), noticeable difference in the lactic acid bacteria counts was not found in this work. Maintaining high CO<sub>2</sub> concentration in the container was found to be beneficial for human preference of *kimchi* without affecting the ripening rate.

## 2. Container system with time-controlled vent/CO<sub>2</sub> flushing

As a way to actively and dynamically modify the *kimchi* container atmosphere, continuous and intermittent flushing was devised as a time-controlled mode, whose CO<sub>2</sub> con-

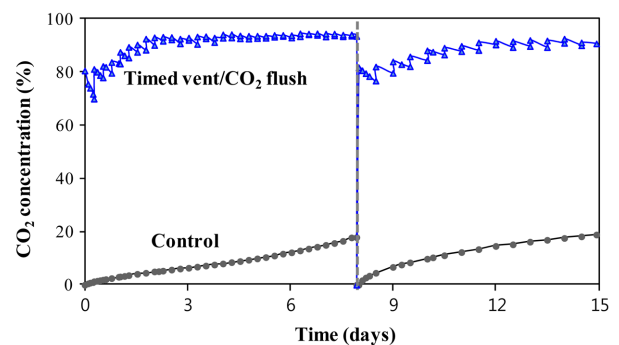


**Fig. 4.** Profiles of CO<sub>2</sub> concentrations in the *kimchi* container (10 L) which was in time-controlled vent/CO<sub>2</sub> flush mode or just closed hermetically (control) at 5°C. Dotted vertical line shows the time of opening the container to take out 37.5% of *kimchi* in the container (3 kg from total 8 kg).

centration profile measured by gas sensor was compared with that of control in Fig. 4. CO<sub>2</sub> flushing synchronized with outlet venting in time-controlled manner was effective to maintain the high CO<sub>2</sub> concentration persistently in the container. After initial attainment of high CO<sub>2</sub> concentration above 0.8 atm (80%) by 2.5 minute flushing, it decreased to 70% rapidly in first 6 hours and increased again to 81% by 50 second CO<sub>2</sub> flushing. The patterned decrease and increase of CO<sub>2</sub> concentration were repeated with its general trend of movement toward higher range at smaller fluctuation. After 2.3 days the fluctuation became very little for the concentration to stay at 93%. This fluctuated shift toward the high CO<sub>2</sub> concentration also happened after opening and closing the container at 7.9 days. The control *kimchi* container experienced steadily increased CO<sub>2</sub> concentration with storage time after container

**Table 2.** Change of the ripening attributes of *kimchi* (salt 2.4%) stored in the container system at 5°C

Container*	Attribute	Time (days)		
		0	7.9	14.9
Control	pH	5.26 ± 0.03	4.24 ± 0.01	4.12 ± 0.02
	Acidity (%)	0.38 ± 0.00	0.65 ± 0.00	0.88 ± 0.00
	Microflora (log(CFU/mL))			
	<i>Lactobacillus</i> sp.	6.38 ± 0.11	8.74 ± 0.04	9.27 ± 0.03
	<i>Leuconostoc</i> sp.	6.49 ± 0.08	9.23 ± 0.03	8.56 ± 0.07
Vent/CO <sub>2</sub> flush	pH	5.26 ± 0.03	4.25 ± 0.01	4.13 ± 0.04
	Acidity (%)	0.38 ± 0.00	0.65 ± 0.00	0.89 ± 0.01
	Microflora (log(CFU/mL))			
	<i>Lactobacillus</i> sp.	6.38 ± 0.11	8.74 ± 0.07	9.23 ± 0.01
	<i>Leuconostoc</i> sp.	6.49 ± 0.08	9.26 ± 0.01	8.54 ± 0.06

\*For the container atmosphere, refer to Fig. 4.

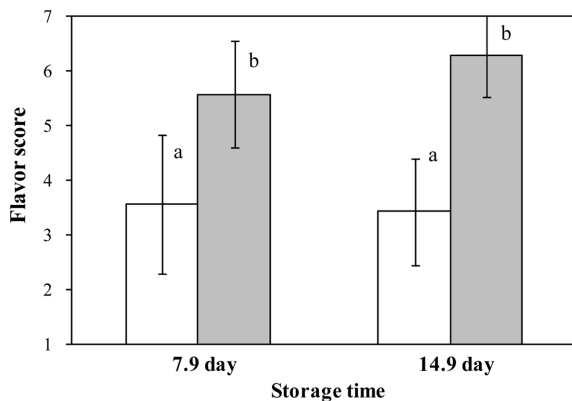

**Fig. 5.** Sensory flavor score of *kimchi* compared between treatments given in Fig. 4 at different ripening stages (n=7). □: control, ■: vent/CO<sub>2</sub> flush. Scale range is from 1 to 7. The different letters for the bars of the flavor scores indicate significant differences between the treatments ( $p \leq 0.05$ ).

closing (up to 18 and 19% at 7.9 and 14.9 days, respectively). The time-controlled vent/CO<sub>2</sub> flush container having maintained high level CO<sub>2</sub> concentration provided better sensory flavor score than the control both at 7.9 days and at 14.9 days, when *kimchi* passed the ripened state of acidity 0.6% (Fig. 5 and Table 2). However, there was no difference in chemical and microbial qualities between treatments (Table 2).

## Conclusions

The *kimchi* storage container system able to actively modify its atmosphere and keep internal high CO<sub>2</sub> concentration was developed with implementation of a programmed vent/CO<sub>2</sub> flushing. The time-controlled vent/CO<sub>2</sub> flushing mode could maintain the desired high level of CO<sub>2</sub> concentration inside

the container through the storage and improved the consumer's preference of *kimchi* product. The developed container system has potential to be applied to commercial *kimchi* refrigerators widely used in Korean households.

## Acknowledgements

This study was supported by the R&D Convergence Centre Support Program of the Ministry of Agriculture, Food and Rural Affairs, Korea (Project #710003).

## References

- Lee, H. L., An, D. S., and Lee, D. S. 2016. Effect of initial gas flushing or vacuum packaging on the ripening dynamics and preference for kimchi, a Korean fermented vegetable. *Packag. Technol. Sci.* 29: 479-485.
- Mheen, T. I. and Kwon, T. W. 1984. Effect of temperature and salt concentration on *kimchi* fermentation. *Korean J. Food Sci. Technol.* 16: 443-450.
- Cheigh, H. S. and Park, K. Y. 1994. Biochemical, microbiological, and nutritional aspects of *kimchi* (Korean fermented vegetable products). *Crit. Rev. Food Sci. Nutri.* 34: 175-203.
- Lee, D. S. and Paik, H. D. 1997. Use of pinhole to develop an active packaging system for *kimchi*, a Korean fermented vegetable. *Packag. Technol. Sci.* 10: 33-43.
- Jakobsen, M., Jensen, P. N., and Risbo, J. 2009. Assessment of carbon dioxide solubility coefficients for semihard cheeses: the effect of temperature and fat content. *Eur. Food Res. Technol.* 229: 287-294.
- Singh, P., Wani, A. A., Karim, A. A., and Langowski, H.-C. 2011. The use of carbon dioxide in the processing and packaging of milk and dairy products: a review. *Int. J. Dairy Technol.* 65: 161-176.
- Jakobsen, M. and Risbo, J. 2009. Carbon dioxide equilibrium between product and gas phase of modified atmosphere pac-

- kaging systems: exemplified by semihard cheese. *J. Food Eng.* 92: 285-290.
8. da Cruz, A. G., Faria, J. d. A. F., and Van Dender, A. G. F. 2007. Packaging system and probiotic dairy foods. *Food Res. Int.* 40: 951-956.
  9. Jansson, S. E. A., Edsman, C. J., Gedde, U. W., and Hedenqvist, M. S. 2001. Packaging materials for fermented milk: effects of material crystallinity and polarity on food quality. *Packag. Technol. Sci.* 14: 119-127.
  10. Argyri, A. A., Nisiotou, A. A., Pramateftaki, P., Doulgeraki, A. I., Panagou, E. Z., and Tassou, C. C. 2015. Preservation of green table olives fermented with lactic acid bacteria with probiotic potential under modified atmosphere packaging. *LWT-Food Sci. Technol.* 62: 783-790.
  11. Hotchkiss, J. H., Werner, B. G., and Lee, E. Y. C. 2006. Addition of carbon dioxide to dairy products to improve quality: a comprehensive review. *Comp. Rev. Food Sci. Food Safety* 5: 158-168.

투고: 2016.11.28 / 심사완료: 2016.12.15 / 게재확정: 2016.12.27