

Wavelet De-Noising for Power Quality Event Detection

Muhammad Ramzan*, Jeonghwa Yoo*, Sangho Choe^o

ABSTRACT

The noise in a power signal degrades the detection rate of the power quality (PQ) event signals. We present a new wavelet de-noising technique for PQ event detection that employs the correlation-based thresholding instead of the wavelet-scale-based thresholding of existing schemes. The simulation results show that the proposed scheme is more robust to Gaussian and impulsive noisy conditions and has further improved detection ratio than existing schemes.

Key Words : Power Quality (PQ), PQ Event Detection, De-noising, Wavelet, Wavelet Correlation

I. Introduction

A discrete wavelet transform (DWT) is well-known to be simple but good for de-noising. Recently, many studies^[1-3] have been presented on wavelet de-noising techniques. The authors in Ref. [4] first suggest a de-noising technique that uses the spatial correlation between adjacent scales to detect PQ events in low signal-to-noise ratio (SNR) channels.

In this Letter, we introduce a new wavelet de-noising technique using correlation-based thresholding, where a modified Donoho's universal threshold that is a function of correlation is defined. The power signal could be corrupted by impulsive noise due to power switch ON/OFF as well as by Gaussian noise. However, in our literature search,

existing techniques have not been evaluated over impulsive noise conditions yet. Hence, we first evaluate the presented de-noising procedure over both Gaussian and impulsive noisy channels and compare to existing schemes. We implement the Bernoulli Gaussian model to generate Gaussian plus impulsive noise samples^[5]. In that model, the noisy power line (or received) signal x_n is represented as

$$x_n = s_n + n_n + i_n = s_n + w_n, \quad (1)$$

where s_n are the power event signal samples, n_n the Gaussian noise samples with variance σ_G^2 , and i_n the impulsive noise samples with variance σ_I^2 .

For the proposed de-noising algorithm, we decompose the input signal x_n using DWT, calculate the correlation between the adjacent detail wavelet coefficient (WC) scales, and then update those scales via thresholding and noise removal processes. For instance, Fig. 1 shows the de-noising process for a noisy sag signal input x_n (Fig. 1(a)), where a sag component of 0.9 pu (per unit) & 2 cycles (when considering critical PQ conditions^[6]) is added to the original 60Hz power signal. Assume that the sampling rate is 15360 points/s (i.e., 256 per cycle), the number of all scales $M = 8$, and the

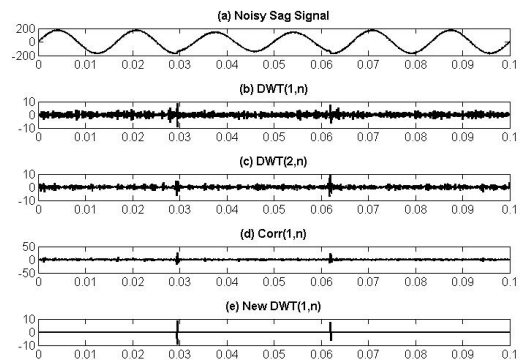


Fig. 1. De-noising of a noisy sag signal

* This work was supported by the Catholic University of Korea, Research Fund, 2016.

♦ First Author : The Catholic University of Korea, engr.ramzan008@gmail.com

◦ Corresponding Author : The Catholic University of Korea, schoe@catholic.ac.kr, 종신회원

* The Catholic University of Korea, mundade@hanmail.net, 학생회원

논문번호 : KICS2016-06-109, Received June 3, 2016; Revised July 11, 2016; Accepted July 11, 2016

SNR = 35dB.

In the following, we explain a DWT-based noise removal algorithm using spatial correlation which corresponds to scale inter-multiplication operation between adjacent WCs (\bullet denotes the scale inter-multiplication operator)^[4].

Step 1: Calculate the correlation coefficients with the adjacent WC scales:

$$Corr_k(m,n) = \prod_{i=0}^{k-1} DWT(m+i,n), \quad (2)$$

where $m (< M-k+1)$ and $n (= 1, 2, \dots, N)$ are the scale (or dilation) and time-shift (or translation) indices, respectively, and $k (\geq 2)$ is the size of adjacent scales that are correlated. For instance, for $k=2$ and $m=1$, the wavelet correlation for a noisy input signal x_n results in

$$Corr_2(1,n) = DWT_x(1,n) \bullet DWT_x(2,n). \quad (3)$$

The correlation (see Fig. 1(d)) represents the two edge points due to the PQ disturbance more clearly than the wavelet scales $DWT_x(\cdot, n)$ (see Fig. 1(b), (c)), as compared to noise samples. Hence, in this Letter, we use the correlation coefficients instead the wavelet-scale coefficients that existing schemes^[4] choose for the threshold decision (as explained the next step).

Step 2: Define the threshold value $THR(m)$ for the noise removal. In our scheme, we modify the Donoho's universal threshold^[7] with a standard deviation σ_{SD} that is a function of the correlation as follows:

$$\sigma_{SD}(m) = \left\{ \text{median}(|Corr_k(m,n)|) / (.6745)^{ak} \right\}^{\frac{1}{k}}. \quad (4)$$

Table 1 shows the statistically-evaluated (and

Table 1. Statistical false alarm and miss detection rate

k	α	$P_{fa}(\%)$		$P_{md}(\%)$	
		n_n	i_n	n_n	i_n
2	1	2.5	4.3455	0	0
	2	0.6	2.5420	0.04	0
	3	<0.08	1.2459	0.98	0.22
3	1	2.2	3.2910	0	0
	2	0.4	1.7840	0	0
	3	<0.05	0.7645	0.2	0.12
Existing[4]	$\cong 1$	N/A		4.12	N/A

selectively chosen) false alarm rate P_{fa} and miss detection rate P_{md} for different combinations of α and k in (4) (resulting in a different threshold) in the presence of pure Gaussian noise ($i_n = 0$ in (1)) or impulsive noise ($i_n \neq 0$ in (1)), in order to estimate an optimal (or near-optimal) threshold. Assume that $P_{fa} < 0.5\%$, $P_{md} < 2\%$ are requested for Gaussian noise, and $P_{fa} < 1.5\%$, $P_{md} < 2\%$ are requested for impulsive noise. From Table 1, we may choose $\alpha = 3$ & $k = 3$ (the best case) or $\alpha = 3$ & $k = 2$ (the second best case) to satisfy the given requirements. In Table 1, we can confirm that the correlation-based thresholding of the proposed scheme is better than the wavelet-scale-based thresholding of the existing scheme^[4] (for which $P_{fa} \cong 1\%$, $P_{md} = 4.12\%$ are evaluated).

Step 3: Assign the masking value $MASK(m,n)$ through a comparison of the threshold value $THR(m)$ and $|Corr_k(m,n)|$; i.e., if $|Corr_k(m,n)|$ is less than $THR(m)$, the masking value is 0; otherwise it is 1:

$$\begin{aligned} & MASK(m,n) = 0; \\ & For m = 1 : M \\ & For n = 1 : N \\ & If |Corr_k(m,n)| \geq THR(m) \\ & MASK(m,n) = 1 \\ & End \\ & End \\ & End \end{aligned}$$

Step 4: Determine the new wavelet scales $\widehat{DWT}_x(m,n)$ as follows:

$$\widehat{DWT}_x(m,n) = MASK(m,n) \bullet DWT_x(m,n).$$

The new scales that suppress noise components (see Fig 1(e)) clarify the starting and ending edges of the disturbance.

Step 5: Apply the inverse discrete wavelet transform (IDWT) to all the new scales obtained in Step 4 such that the recovered signal can be obtained.

We implement the proposed algorithm using Matlab and apply it to various noisy PQ events, including sag, swell, interruption, harmonics, and transient events, via a Gaussian noise channel. In simulation, as the mother wavelet, we choose Daubechies 8 (db8). The threshold is set to the case

$\alpha = 3$ & $k = 2$ rather than the case $\alpha = 3$ & $k = 3$ considering comparable hypothetical testing results as well as algorithm simplicity. The detection rate is calculated by averaging the sample results at different cycles. From Table 2, we observe the detection rate and recovered SNR gain η ($=\eta_{output}$ [recovered SNR] - η_{input} [input SNR]) of the proposed scheme and compares it to the one of the existing scheme in Ref. [4] (see the bracket () in Table 2).

Table 2 shows that the proposed scheme improves the detection rate, especially at low SNR (≤ 40 dB), when compared to the existing one^[4]. It also shows that η of the presented scheme is improved.

We simulate various PQ events over impulsive noise channels, for which the two impulsive noise parameters are set $\mu = 5$, $\psi = 0.5$ ^[5]. The results in Table 3 confirm that the proposed scheme is superior to the conventional scheme (see () in Table 2) even at the impulsive conditions.

Table 2. PQ event detection ratio and recovered SNR gain over Gaussian noise

SNR(dB)		Detection Rate				
η_{input}	η_{output}	Sag	Swell	Interruption	Harm- onics	Trans- ient
40	45.4	100 (98)	100 (97)	100 (100)	100 (97)	100 (100)
35	40.1	100 (96)	98 (94)	100 (100)	100 (95)	100 (100)

Table 3. PQ event detection ratio and recovered SNR gain over impulsive noise

SNR(dB)		Detection Rate				
η_{input}	η_{output}	Sag	Swell	Interruption	Harm- onics	Trans- ient
40	44.5	100 (97)	100 (95)	100 (96)	100 (98)	100 (97)
35	40.4	100 (93)	98 (90)	100 (98)	100 (96)	100 (98)

II. Conclusion

In this Letter, we have proposed a new wavelet de-noising technique using correlation-based thresholding. The proposed scheme has improved the detection rate of various PQ events compared to existing schemes over Gaussian and impulsive noisy environment.

References

- [1] H. T. Yang and C. C. Liao, "A de-noising scheme for enhancing wavelet-based power quality monitoring system," *IEEE Trans. Power Delivery*, vol. 16, no. 3, pp. 353-360, Jul. 2001
- [2] M. A. Golroudbari, "Signal de-noising based on wavelet transform using a multi-level threshold function," *7th Int. Conf. Appl. of Inf. Commun. Technol.*, pp. 1-5, Baku, Azerbaijan, Oct. 2013.
- [3] I. Eom and Y. Kim, "Multiple decision model for image denoising in wavelet transform domain," *J. KICS*, vol. 29, no. 7C, pp. 937-945, Jul. 2004.
- [4] C. C. Liao, H. T. Yang, and H. H. Chang, "De-noising techniques with a spatial noise-suppression method for wavelet-based power quality monitoring," *IEEE Trans. Instrumentation and Measurement*, vol. 60, no. 6, pp. 1986-1996, Jul. 2011.
- [5] G. Ndo, P. Siohan, and M. Hamon, "Adaptive noise mitigation in impulsive environment: application to power-line communications," *IEEE Trans. Power Delivery*, vol. 25, no. 2, pp. 647-656, Apr. 2010.
- [6] IEEE standards coordinating committee 22 on power quality, *IEEE recommended practice for monitoring electric power quality*, IEEE Standard 1159-1995, Jun. 1995.
- [7] D. L. Donoho and J. M. Johnstone, "Ideal spatial adaptation by wavelet shrinkage," *Biometrika*, vol. 81, no. 3, pp. 425 - 455, Jun. 1993.