

Depth estimation of an underwater target using DIFAR sonobuoy

다이파 소노부이를 활용한 수중표적 심도 추정

Young gu Lee^{1†}

(이영구^{1†})

¹Republic of Korea Navy Airwing 6

(Received February 13, 2019; revised March 18, 2019; accepted April 4, 2019)

ABSTRACT: In modern Anti-Submarine Warfare, there are various ways to locate a submarine in a two-dimensional space. For more effective tracking and attack against a submarine the depth of the target is a critical factor. However, it has been difficult to find out the depth of a submarine until now. In this paper a possible solution to the depth estimation of submarines is proposed utilizing DIFAR (Directional Frequency Analysis and Recording) sonobuoy information such as contact bearings at or prior to CPA (Closest Point of Approach) and the target's Doppler signals. The relative depth of the target is determined by applying the Pythagorean theorem to the slant range and horizontal range between the target and the hydrophone of a DIFAR sonobuoy. The slant range is calculated using the Doppler shift and the target's velocity. the horizontal range can be obtained by applying a simple trigonometric function for two consecutive contact bearings and the travel distance of the target. The simulation results show that the algorithm is subject to an elevation angle, which is determined by the relative depth and horizontal distance between the sonobuoy and target, and that a precise measurement of the Doppler shift is crucial.

Keywords: Depth estimation, DIFAR (Directional Frequency Analysis and Recording) sonobuoy, Underwater target, Doppler effect

PACS numbers: 43.60.Jn, 43.30.Es

초 록: 현대 대잠전에 있어 잠수함에 대한 2차원 위치추정에 다양한 방법들이 있다. 잠수함에 대한 보다 효과적인 추적 및 공격을 위해 표적 심도는 매우 중요한 요소이다. 하지만 현재까지도 잠수함의 심도를 찾아낸다는 것은 어려운 일이다. 본 논문에서는 최단접근점(Closest Point of Approach, CPA) 전후의 표적 접촉방위와 표적 도플러 신호 등 다이파 소노부이 접촉정보를 이용한 잠수함 심도 추정 기법을 제안하고자 한다. 표적의 상대심도는 표적과 다이파 소노부이의 청음기 간 사선거리 및 수평거리에 피타고라스 정리를 적용하여 결정된다. 이때 사선거리는 도플러변이와 표적 속도에 의해서 계산되며, 수평거리는 표적에 대한 연속된 접촉방위와 표적의 이동거리에 삼각함수를 적용하여 얻을 수 있다. 본 논문에서 제시된 알고리즘의 성능은 소노부이-표적 간 수평거리 및 상대심도에 의해 결정되는 고각과 도플러 변이 값의 측정 정확성에 의해 좌우됨을 시뮬레이션을 통해 알 수 있다.

핵심용어: 심도 추정, 다이파 소노부이, 수중표적, 도플러 효과

I. Introduction

Acoustic information on an underwater target has been

essential to detect, localize, track, and attack targets in ASW (Anti-Submarine Warfare) since World War II. Recently acoustic information such as bearing, range, and frequency of a target, which is required to conduct ASW, has been provided for operators through DIFAR (Directional Frequency Analysis and Recording) and/or DICASS (Direc-

[†]Corresponding author: Young gu Lee (uav_universal@hotmail.com)
Republic of Korea Navy Airwing 6 Operations department,
6001, Donghaean-ro, Nam-gu, Pohang-si, Gyeongsangbuk-do,
Republic of Korea
(Tel: 82-54-290-6538)

tional Command Activated Sonobuoy System) sonobuoy. Sonobuoys are usually classified into two categories; active and passive. Active sonobuoys emit pings into water and receive the reflected echo from a target, which provides bearing and range data. This information is sent to a receiving aircraft via VHF (Very High Frequency) radio. The DICASS sonobuoy corresponds to active one. Passive sonobuoys, however, just listen for the acoustic signals generated by submarines' propellers, reduction gears, and auxiliary units such as generators and compressors, without the emission of sound enable covert searching and tracking of a target. The DIFAR sonobuoy corresponds to passive one. The detection probabilities and contact ranges of a target are highly dependent on the oceanic environments and geometrical relationship between the target and sonobuoys due to the nature of underwater sound propagation such as refraction, reflection, and scattering.

A good deployment of underwater sensors in proper positions leads to success in ASW. Furthermore, knowing the depth of target is a good advantage in the ASW. Up to now, however, the estimation of a target's depth and the decision on the deploying depth of a sonobuoy have been dependent on the experience and skill of acoustic operators of airborne assets. In some literature,^[1,2] the depth estimation using a Lloyd's mirror effect was presented. In most cases, the Lloyd's mirror effect occurs when the phase difference between the direct and reflected paths of sound is constant, i.e. they are coherent. The coherence typically takes place under the circumstances in which the distance between the source and receiver is sufficiently short to keep the influences of wave activities and turbulence minimal and the sea surface is smooth enough to make the amplitudes of the direct and reflected paths approximately equal.^[2] The sea conditions around the Korean Peninsula, however, are not always smooth enough to get a definite interference pattern, especially in winter. Furthermore, the contact range of a target is very short, which may not provide a receiver with enough strength of reflected sound to form coherent interference. These factors make it difficult to exploit the Lloyd's mirror effect in extracting depth

information as the target transits past the closest point of approach CPA (Closest Point of Approach).

In this paper we propose a possible solution to the depth estimation of an underwater target utilizing the contact information from DIFAR sonobuoys even in situations in which the Lloyd's mirror effect does not occur. Chapter 2 gives an overview of DIFAR sonobuoys and the Doppler effect for depth estimation. Chapter 3 provides the formulation for depth estimation of a target, employing the information from DIFAR sonobuoys. Chapter 4 describes simulation results, which illustrates variations of performance of the algorithm as the horizontal and vertical ranges change between a DIFAR sonobuoy and its target.

II. Overview of DIFAR sonobuoys and the Doppler effect

This chapter gives an overview of DIFAR sonobuoys and the Doppler effect, which constitute the basis for the depth estimation of underwater targets.

2.1 DIFAR Sonobuoy

The DIFAR sonobuoy is an expendable, passive acoustic sensor used usually by Navy airborne platforms to search, localize, and classify submarines. It provides operators with directional and frequency information on signals of interest emitted from submarines. Furthermore, it can be used to derive a submarine's position by carrying out a triangulation using more than two contact bearings at the same time. The acoustic information transmitted from a DIFAR sonobuoy to the on-board analysis system is typically displayed in the form of a LOFAR (Low Frequency Analysis and Recording) gram, which shows a frequency spectrum as a function of time, as well as in the form of a contact bearing to the signal that originates from the submarine.^[3]

2.2 Doppler Effect

The Doppler effect is the change in frequency of all

kinds of waves for a receiving sensor moving relative to its source. The amount of frequency shifts are proportional to the relative velocities among the target, the receiver, and the medium.^[4]

Doppler information, including the frequency spectrum, gained from the hydrophone of a DIFAR sonobuoy can be analyzed and utilized in real time through the on-board system of airborne assets to provide course and speed of underwater target as well as its identity.

Assuming that the velocities of a target and the DIFAR sonobuoy with respect to the medium are much lower than that of sound wave in the medium, the relationship between received frequency f and radiated frequency f_0 is given^[4] as

$$f = \left(\frac{c \pm V_{difar}}{c \pm V_{radial}} \right) f_0, \tag{1}$$

where c is the velocity of a sound wave in the medium, V_{difar} is the velocity of the DIFAR sonobuoy, V_{radial} is the velocity of the underwater target.

The Doppler effect is typically utilized for measuring the rate of change of movement such as the velocity of a moving vehicle, blood flow measurement in medical imaging, etc^[4]. In literature, however, the Doppler effect, which was measured by passive acoustic sensor, was utilized to measure the range of a moving object.^[5]

In the following chapter, the Doppler effect is used to measure the slant range between a hydrophone and an underwater target at CPA.

III. Formulation for Depth Estimation

The formulas for target depth estimation can be derived with certain assumptions as follows

- 1) The target moves with constant course and speed without any evasive maneuvers.
- 2) The depth of the target is constant.
- 3) The fundamental frequency(f_0) are known.
- 4) The speed of the target is known by way of successive

its positions gained by DIFARs and elapsed time.

- 5) The difference of DIFAR sonobuoy's contact bearings, i.e. the bearing at CPA and the bearing prior to CPA, is small enough to validate the small angle approximation applied to derive Eq. (2).

The depth of the target relative to the hydrophone of a DIFAR sonobuoy can be calculated by the trigonometric relationship given the slant range(R_s) and horizontal range(R_h) from the hydrophone to the target as shown in Fig. 1.

The slant range(R_s) can be calculated by using the Doppler effect. The Doppler speed of the target relative to the hydrophone, which is a radial speed, can be obtained using trigonometry as shown in Fig. 2 with a small angle approximation as follows

$$V_{radial} = V_{tgt} \sin \dot{\theta} \approx V_{tgt} \tan \dot{\theta} = \frac{V_{tgt}^2 \times t}{R_s}, \tag{2}$$

where V_{radial} and V_{tgt} denote the apparent speed of a target relative to the hydrophone and the actual speed of

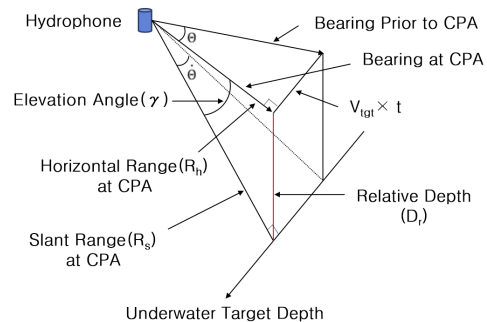


Fig. 1. Geometrical relationship for depth estimation of target.

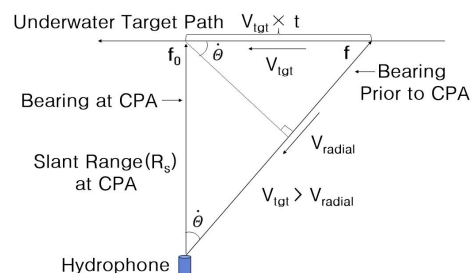


Fig. 2. Trigonometric relationship for calculating V_{radial} .

the target, respectively, while $\dot{\theta}$ and t indicate the bearing difference and elapsed time between contacts at CPA and before reaching the CPA, respectively. The occurrence of a CPA can be determined by LOFAR gram of the DIFARs.

To hold the small angle approximation valid, the $\dot{\theta}$ or t should be as small as possible. The V_{radial} can also be derived in terms of the change of frequency from the well known Doppler equation like Eq.(1). Since the V_{difar} is negligible compared with the c and V_{tgt} , Eq. (1) can be expressed as

$$f = \left(\frac{c + V_{difar}}{c - V_{radial}} \right) f_0 \approx \left(\frac{c}{c - V_{radial}} \right) f_0 \quad (3)$$

$$= \left(\frac{1}{1 - \frac{V_{radial}}{c}} \right) f_0 = \frac{\left(1 + \frac{V_{radial}}{c} \right)}{1 - \left(\frac{V_{radial}}{c} \right)^2} f_0.$$

Furthermore, because the term $\left(\frac{V_{radial}}{c} \right)^2$ in Eq. (3) is almost zero, Eq. (3) can be re-expressed as

$$f = \left(1 + \frac{V_{radial}}{c} \right) f_0. \quad (4)$$

Rearranging Eq. (4) yields the V_{radial} in terms of frequency and sound speed as

$$V_{radial} = \frac{(f - f_0)}{f_0} \times c. \quad (5)$$

Taking the derivatives of Eq. (2) and Eq. (5) with respect to time yields following equations

$$\frac{dV_{radial}}{dt} = \frac{V_{tgt}^2}{R_s}, \quad (6)$$

$$\frac{dV_{radial}}{dt} = \frac{df}{dt} \times \frac{c}{f_0}. \quad (7)$$

Setting Eq. (6) and Eq. (7) equal and rearranging it yield the slant range(R_s) equation as

$$R_s = \frac{V_{tgt}^2 \times f_0}{\frac{df}{dt} \times c} = \frac{V_{tgt}^2 \times f_0}{f_{sr} \times c}, \quad (8)$$

where the subscript sr denotes the shift rate. The horizontal range(R_h) can be easily calculated using the difference(θ) of DIFAR contact bearings on the display of acoustic signal processing system as

$$R_h = \frac{V_{tgt} \times t}{\tan \theta}. \quad (9)$$

Finally, the depth of target relative to the hydrophone, D_r , can be obtained from Eq. (8) and Eq. (9) using the Pythagorean theorem as

$$D_r = \sqrt{R_s^2 - R_h^2}. \quad (10)$$

Since the Eq. (10) provides operators with a relative depth of target, the operator can not tell whether the target is located above the hydrophone or below. To eliminate this ambiguity, another DIFAR sonobuoy, which is set to a different depth, is required. In this case, there are 4 possible combinations as shown below

$$1) d_{h1} + D_{r1} \quad 2) d_{h1} - D_{r1} \quad 3) d_{h2} + D_{r2} \quad 4) d_{h2} - D_{r2},$$

where the d_{h1} , d_{h2} , D_{r1} , and D_{r2} represent the hydrophone depth of the 1st sonobuoy, the hydrophone depth of the 2nd sonobuoy, the depth of target relative to the 1st hydrophone, and the depth of target relative to the 2nd hydrophone, respectively. Comparing each combination, there are two which have the same or similar value each other. Then, the estimated absolute depth of target will be given by averaging these two values.

IV. Simulation Results

Simulations are conducted under the condition that a target moves at a constant speed with no course and depth change. For verification of the performance of the algorithm, actual maneuver data of a real submarine in the real world are used to be compared with the results of simulation. That is, the data such as contact bearings, frequencies, and speeds obtained from the real submarine maneuvering with constant speed, course, and depth as specified in Table 1 are used for simulations. And the averaged underwater sound speed measured from a depth of upper sonobuoy to that of lower one, assuming that submarine is positioned between both the depth as usual, is applied for simulation. As a geometrical relationship between the underwater target and sonobuoy is a critical factor of the performance, simulations are focused on the errors caused by a geometrical relationship to verify the availability of the algorithm to the real world applications by comparing it with the data from actual submarine. The simulations are conducted with regard to performance variations with changes of horizontal range, while keeping relative depth between the underwater target and sonobuoy constant, and performance variations with changes of relative depth, while keeping the horizontal range constant. The frequencies, contact times, and bearings at the CPA and prior to CPA, and the speed obtained from underwater target are utilized for simulation. Table 1 is an example of input parameters for simulation.

The simulation results show that the performance of the algorithm is subject mainly to the elevation angle (γ), which is the angle between the horizontal contact bearing line and the slant one, and the small angle approximation

Table 1. Input Parameters for simulation.

	Time	Bearing	Frequency	Speed	Sound velocity
Prior to CPA	10 h 11 m 50 s	106°	$f_0 + 0.19$	5.9 kts	1503 m/s
CPA	10 h 12 m 10 s	116°	f_0		

applied to Eq. (2). For the elevation angle (γ), Fig. 3 illustrates the estimation error, difference between actual depth of the underwater target and estimated depth, increases with the horizontal range, while it decreases with the vertical distance as shown in Fig. 4.

This is due to the small angle approximation, which is applied to Eq. (2). In Figs. 1 and 2, as the elevation angle (γ) increases, θ' becomes smaller, making the error of the small angle approximation in Eq. (2) small. The elevation angle (γ) should be greater than a value of 7° to obtain an operationally useful performance with an error of less than 5%. For small angle approximation, the discrepancy

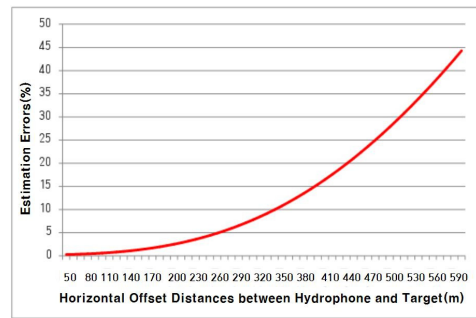


Fig. 3. Performance variations with changes in horizontal range.

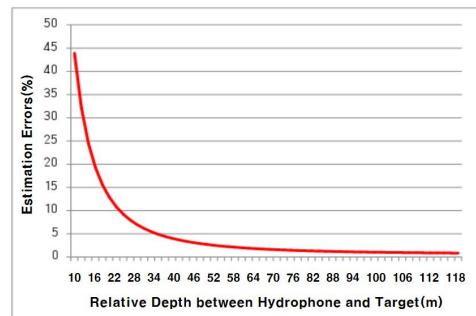


Fig. 4. Performance variations with changes in relative depth.

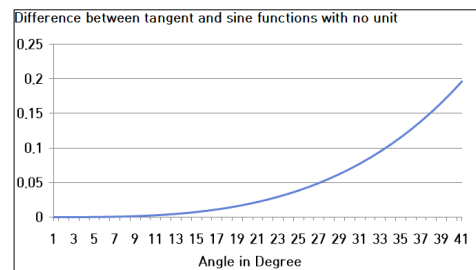


Fig. 5. Small angle approximation error with angle.

between trigonometric values, $\tan \theta'$ and $\sin \theta'$ applied to Eq. (2), begins to increase rapidly beyond the value of 10° as shown in Fig. 5. this indicates that an interval of reading contact information such as the bearing at CPA and the bearing prior to CPA on the display of the acoustic system is important and it should not exceed 10° in order to attain a level of performance applicable to real world operations.

V. Conclusions

In this paper a method has been proposed which can provide operators involved in ASW with a means to estimate the depth of an underwater target by exploiting the information gained from DIFAR sonobuoy irrespective of the existence of the Lloyd's mirror effect. It has been shown through the simulations that care should be exercised by operators to enhance the accuracy of the estimation.

The simulation results show that the greater the elevation angle is, the more accurate the estimation of an underwater target's depth is.

References

1. J. G. Lim, *Performance analysis of automatic target detection algorithm for underwater proximity detection sensor node*, (Master's degree, Master's degree, 2012).
2. D. Kapolka, "Equivalence of the waveguide invariant and two path ray theory methods for range prediction based on Lloyd's mirror patterns," *J. Acoust. Soc. Am.* **123**, 3596 (2008).
3. D. Desrochers, *High resolution beamforming techniques applied to a DIFAR sonobuoys*, (Master's degree, Royal Military College of Canada, 1999).
4. *Lecture21: The Doppler Effect*, <http://users.physics.harvard.edu/~schwartz/15cFiles/Lecture21-Doppler.pdf>, 2019.
5. R. Olson and D. H. Cress, "Passive Acoustic Range Estimation of Helicopters," Technical Report EL-92-13 of US Army Corps of Engineers, 06-08 (1992).

Profile

▶ Young gu Lee (이영구)



He graduated with a BS in computer science from R.O.K Naval Academy in 2002. He took the MS degree in Aerospace Engineering at Korea Advanced Institute of Science and Technology. He has been working for R.O.K Navy as Naval Flight Officer. His research interest includes multi-static acoustic related optimization problem and signal processing.