



Swimming behavior analysis of small box jellyfish (*Carybdea brevipedalia*)

Yongbeom Pyeon¹, Jinho Chae², Wooseok Oh³, Doo Jin Hwang¹, Kyoungsoon Lee^{4,*}

¹ Division of Fisheries Science, Chonnam National University, Yeosu 59696, Korea

² Marine Environmental Research & Information Laboratory, Gunpo 15850, Korea

³ Institute of Low-Carbon Marine Production Technology, Pukyong National University, Busan 48513, Korea

⁴ Division of Marine Production System Management, Pukyong National University, Busan 48513, Korea

Abstract

In this study, the swimming behavior of a small box jellyfish (*Carybdea brevipedalia*), which consists of inhaling external seawater and expelling it through its mouth to generate forward thrust, was characterized using particle image velocimetry (PIV). The flow rate and structure during the suction and discharge process were quantitatively analyzed. During swimming, there was a change in the ratio of the internal area during inhalation and expulsion. Specifically, there was a 1.10-fold difference between the maximum area after inhalation and the minimum area after discharge. The maximum distance traveled after discharge was inversely proportional to the size of the inner area, with a 2.48-fold difference in the minimum distance traveled after suction. Depending on the propulsion stage, the inner area decreased and then increased in proportion to the moving distance and speed. The moving distance of the small box jellyfish was measured for each period. The speed for each swimming stage increased and then decreased at intervals of 0.15 to 0.2 seconds, and the suction and discharge cycle period was measured at approximately 0.5 seconds. Collectively, our findings provide a methodological basis for studying the swimming behavior of small and highly active trailing jet jellyfish, as well as the biological mechanisms that determine this behavior.

Keywords: Swimming behavior, Small box jellyfish, Particle image velocimetry

Introduction

Small box jellyfish, which belong to the family *Carybdeidae* of the order Cubomedusae, are small species that reside in the surface layer of marine environments with a depth of 3 m at a water temperature of 25 °C. These organisms exhibit an average umbrella diameter of approximately 3 cm and are characterized

by long and thin tentacles that extend up to 2 m. These jellyfish can be found in the inner bay of Namhae in Korea during the summer season.

Particle image velocimetry (PIV) is a non-contact imaging technique that enables the quantification of the hydrodynamic flow structure of aquatic organisms. PIV analyzes the velocity and structure of a flow field by tracing the pattern and center

Received: Jun 8, 2023 Revised: Oct 4, 2023 Accepted: Oct 13, 2023

*Corresponding author: Kyoungsoon Lee

Division of Marine Production System Management, Pukyong National University, Busan 48513, Korea

Tel: +82-51-629-5889, Fax: +82-51-629-5886, E-mail: klee71@pknu.ac.kr

This is an Open Access article distributed under the terms of the Creative Commons Attribution Non-Commercial License (<http://creativecommons.org/licenses/by-nc/4.0/>) which permits unrestricted non-commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.

Copyright © 2024 The Korean Society of Fisheries and Aquatic Science

of the particles using visualization and digital image processing technology to characterize the behavior of these particles after injecting tracer particles with a specific gravity similar to the medium of the flow field. PIV minimizes external stimuli of marine organisms and enables multi-point measurements around the object. Therefore, this approach is especially well suited for analyzing the abnormal flow field of marine organisms with various shapes. Marras & Porfiri (2012) created a robotic fish and measured its flow field using PIV under non-static flow conditions. Under certain conditions, living organisms keep a certain distance from the robot, and the robot can guide living organisms. Liu et al. (2013) applied PIV to verify the results of the analysis of the unsteady flow field of a star-shaped artificial reef, and demonstrated that there is a reciprocal effect between the reefs at regular intervals. Murphy et al. (2012) quantified the flow field surrounding zooplankton by measuring the flow and swimming pattern of zooplankton with three-dimensional PIV. Flammang et al. (2011) visualized the three-dimensional vortex wake interaction between the dorsal and anal fins and tails of fish using the PIV method and found that the dorsal and anal wakes were rapidly assimilated into the caudal vortex wakes. Dabiri et al. (2010) analyzed how an optimal vortex was gen-

erated by measuring wakes with PIV in seven types of jellyfish. Lim & Demont (2009) created a mechanical crayfish model based on the kinematics of the American crayfish, visualized the abdominal flow and caudal jet with PIV, and demonstrated that it generates thrust comparable to other species with good propulsion performance. Most of the hydrodynamic forces acting on fish are caused by flow dynamics, such as changes in the fish skin and boundary layer and the size of the wake. Conversely, the kinetic reactions of fish are also largely determined by changes in flow velocity and pressure (Kim et al., 1996). Small box jellyfish swim by inhaling and expelling water internally.

Therefore, the PIV technique was used to provide accurate information about the swimming style of the small box jellyfish and to analyze the swimming style through quantitative velocity field and vorticity analysis.

Materials and Methods

As shown in Fig. 1, a total of ten specimens with umbrella diameters ranging between 2 and 4 cm were collected in Songjeong-ri (Namhae, Korea) in September 2020. To understand the swimming behavior of the small box jellyfish in the wild,

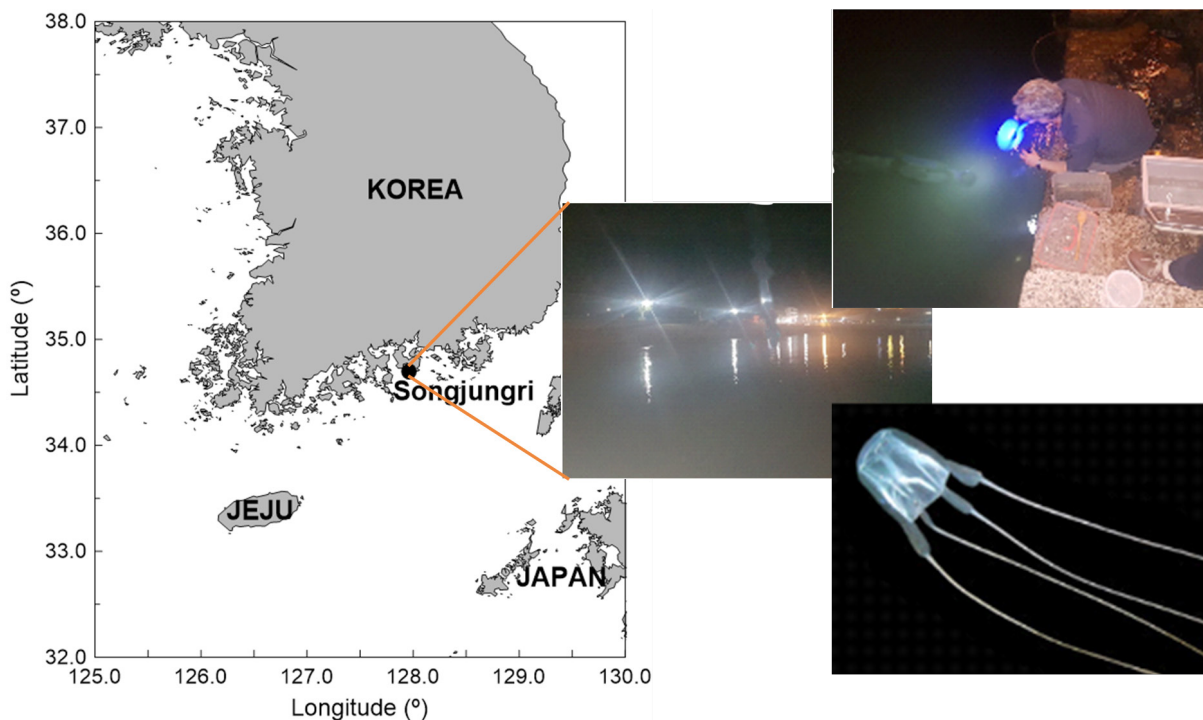


Fig. 1. Sampling site of Songjeong-ri, Namhae Coastal area.

they were taken to the laboratory after collection. Collected jellyfish were acclimatized for 1–2 days in a [1 m(L) × 0.5 m(W) × 1 m(H)] aquarium with circulating seawater to mimic their natural environment. The rearing water was filtered seawater under the same temperature and salinity conditions as the collected waters. As shown in Fig. 2A, the flow visualization experiment was performed using a high-speed 2,048 × 2,018 pixel camera (VH-310M-M264, ViewWorks, Anyang, Korea), a 532 nm Nd-Yag laser (VA-II-N-532-Green 5W, Viasho, Beijing, China), and PIV software (Thinkers EYES, TNTech, Busan, Korea), as well as particles (seeding particle silver coated glass spheres 20 μm, Dantec, Skovlunde, Denmark), a computer (i7, intel, Santa Clara, CA, USA), and a 500 mm (W) × 300 mm (H) × 150 mm (L) acrylic water tank. A single camera and two Nd-Yag Lasers with a beam width of 2 mm were used to scan the light source and to avoid shadows on both sides of the measurement object.

The swimming dynamics of jellyfish are characteristically asymmetric, and therefore two laser light sources with the same output were used to measure the flow on the left and right at the same time.

As shown in Fig. 2B, the internal area was calculated using the NI-Vision 2020 program (EMERSON, Seoul, Korea). The area of 14 points was measured along the outline after the image preprocessing to set the boundary through boundary point detection. The area, height, and length at 14 points were calculated as the aspect ratio. As shown in Fig. 2C, the measurement location started from 7.0×10^{-2} m from the floor and 2.0×10^{-2} m from the wall and covers an area of 5.0×10^{-2} m² with a grid of 100 (horizontal) × 50 (vertical) pixels, and the resolution was measured to be 2.027×10^{-4} m/pixel. The PIV technique is a method for hydrodynamic analysis of the flow field that consists of injecting particles with the same specific gravity as the medium of the flow field and analyzing the behavior of these particles

using digital visualization technology. PIV is a non-contact flow measurement method that is used when it is difficult to install a contact sensor and various types of flow fields. Therefore, this approach is uniquely well suited for the analysis of the behaviors of marine organisms. Simultaneous multi-point measurements provide several advantages in flow analysis around the measurement target when flow analysis of instantaneous flow changes at the measurement point is required. The formation of complex flow patterns around the jellyfish due to its long tentacles could be successfully predicted. Therefore, the swimming behavior was analyzed using simultaneous multi-point measurements.

Results and Discussion

Changes in the flow field structure were qualitatively examined and the swimming speed was measured based on quantitative data by analyzing the inhalation and discharge processes of swimming small box jellyfish using the PIV method.

The measurement reference point cannot be easily identified due to the many changes in the shape of the jellyfish induced by repeated contraction and relaxation in a short time. Therefore, the positions of 14 points and movement distances were calculated at 0.1 seconds intervals in the front of the head, where the external change was relatively small, and the results were shown in Fig. 3A. The measurements were taken from 14 points from the starting point (a) to the end point (n). The moving distance was measured at 6.371×10^{-2} m, the average moving distance was 0.46×10^{-2} m, and the average speed was 3.64×10^{-2} m/s. The maximum moving distance was calculated at 0.66×10^{-2} m and the minimum moving distance was 0.27×10^{-2} m. As shown in Fig. 3B, the maximum moving distance was 2.48 times the minimum moving distance, and the speed was proportional to this difference. The distance traveled and

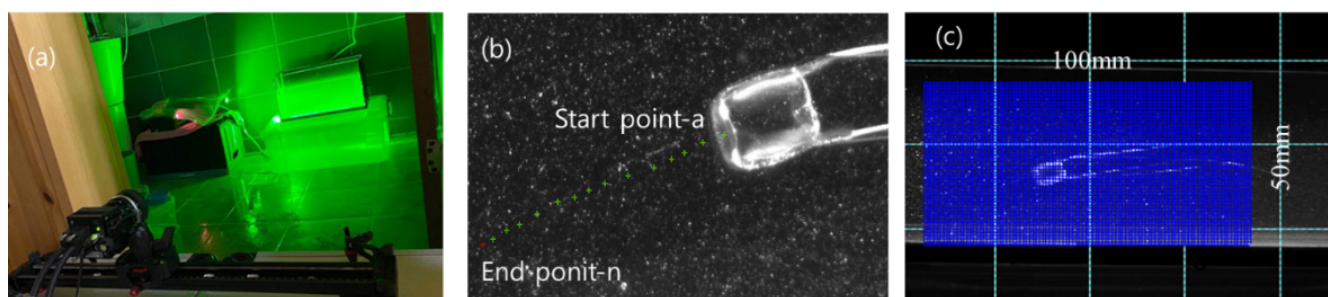


Fig. 2. Schematic of a small box jellyfish experiment. A: Experimental system and configuration. B: Distance traveled with each, inhalation/expulsion cycle. C: Calculation zone.

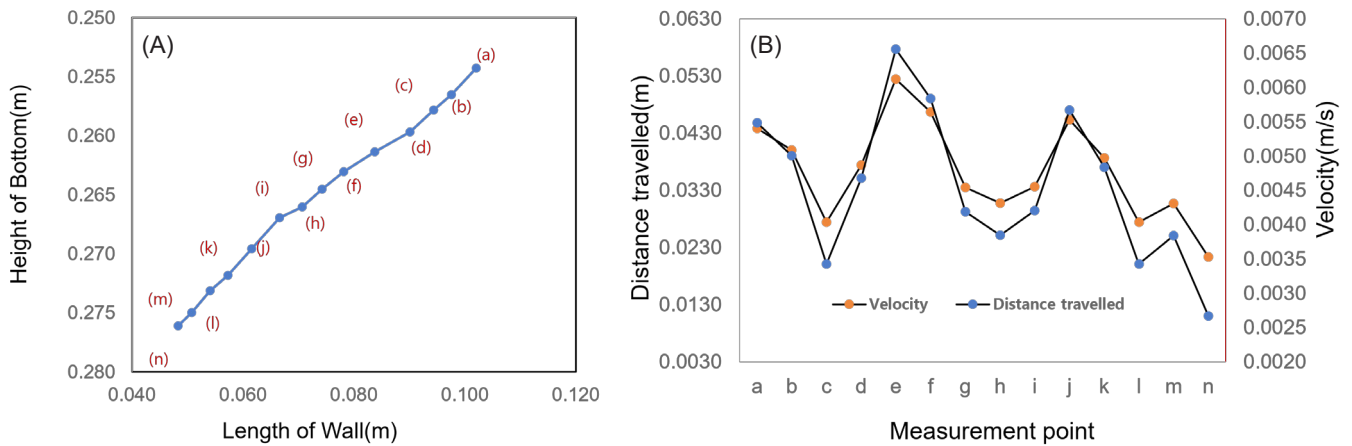


Fig. 3. Changes during the swimming dynamics of the jellyfish. A: 14 moving points. B: Distance traveled.

speed varied depending on the propulsion phase (i.e., inhalation vs. expulsion), which repeatedly decreased and increased in proportion to each other. As illustrated in Fig. 3B, the moving distance and speed decreased from point “a” to point “c,” speed increased up to point “e,” decreased up to point “h,” increased up to point “j,” decreased up to point “l,” and again increased to point “m” and then decreased thereafter. The speed for each phase was repeatedly increased and decreased at intervals of 0.15 to 0.2 seconds, and the period was measured to be approximately 0.5 seconds.

As shown in Fig. 4, the velocity distribution and streamline structure were visualized by measuring the velocity at 14 points. Since the streamline can indicate the direction of moving particles, the direction and flow rate of a fluid flowing into the body of a small box jellyfish could be predicted. The propulsion speed of the discharge part was measured to be 6.0×10^{-2} m/s, which was as high as 600% of the speed around the tentacles (1.0×10^{-2} m/s). Interestingly, this speed was proportional to the change in the internal area and the movement speed. After qualitative visualization of the flow velocity distribution and the streamline structure by analyzing the velocity field at the 14 sample points, the internal area of the small box jellyfish body was found to be consistent with the pattern of periodic increase and decrease from a minimum of 4.68×10^{-2} m² to a maximum of 5.18×10^{-2} m². The trailing jet of the small box jellyfish was found to have an average speed of 5.5×10^{-2} m/s, which has a propulsion capacity of 66.18% compared to the moving speed of 3.64×10^{-2} m/s. However, unlike the moon jellyfish that moves through the contraction and relaxation of its bell, the

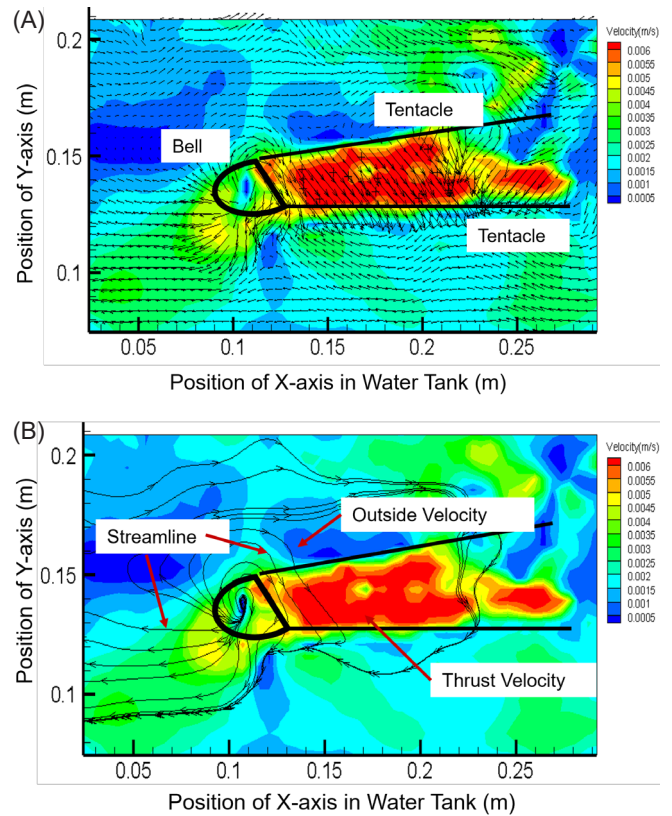


Fig. 4. Velocity field. A: Velocity of body and tentacle surface of the body and tentacles. B: Streamline.

rowing pattern of the small box jellyfish exhibited no C-shaped vorticity characteristics (Kim et al., 2019). Therefore, it appeared that small box jellyfish have better swimming ability than moon

jellyfish, whose swimming dynamics rely on repeated muscle contraction and relaxation.

Research on mimicking marine organisms and using them for engineering purposes has been ongoing for several decades. For example, several studies (Chen et al., 2014; Fu et al., 2017; Luo et al., 2016) have reduced drag by hydro-dynamically analyzing shark skin to create a structure that can be applied to remotely operated vehicles, autonomous underwater vehicles, and swimsuits. Shen et al. (2017) fabricated four actuators by simulating the swimming behaviors of cephalopod mollusks, thus reducing energy loss and improving efficiency. Zhang et al. (2021) created a biomimetic soft robotic siphon by mimicking the siphon actuation muscles (SAMs) of cephalopods, which made it possible to increase thrust in a very short time. Szymak & Przybylski (2018) applied two fins imitating fish and seals to a biomimetic underwater vehicle and analyzed the effects of the fins. Chu et al. (2012) developed a smart actuator that mimics muscle contractions using a shape memory alloy, which achieved an increased speed per body length coupled with size and weight reduction, as well as noise reduction during the operation of a biomimetic underwater robot. As discussed above, marine organisms exhibit high-efficiency propulsion and control in water, and this ability allows them to effectively swim and control their posture in the water column while expending minimal amounts of energy. Streamlined fish like tuna show very efficient propulsion ability (Pavlov et al., 2017). Marine organisms swim in different water columns, ranging from the surface to several kilometers deep. Evolutionarily, they have a wide range of morphologies depending on the influence of fluids. The measurement of marine organisms using Marine organisms swim in different water columns, ranging from the surface to several kilometers deep. Evolutionarily, they have a wide range of morphologies depending on the influence of fluids. The measurement of marine organisms using PIV, a non-contact multipoint measurement method, provides a way to minimize external stimuli and accurately measure asymmetric swimming forms. By analyzing the quantitative velocity field and vorticity according to the appearance and swimming form of marine organisms, it is possible to identify the mechanisms of the environment and swimming form of marine organisms, and to reflect them in the placement of marine structures and the design of fishing gear.

Competing interests

No potential conflict of interest relevant to this article was re-

ported.

Funding sources

This study was funded by grant from the project titled “Development of AI Based Smart Fisheries Management System (No. 20210499)” from the Ministry of Oceans and Fisheries, Korea.

Acknowledgements

This research was funded by grant from the project titled “Development of AI Based Smart Fisheries Management System (No. 20210499)” from the Ministry of Oceans and Fisheries, Korea. We are grateful to two anonymous reviews for helpful improving this paper.

Availability of data and materials

Upon reasonable request, the datasets of this study can be available from the corresponding author.

Ethics approval and consent to participate

Not applicable.

ORCID

Yongbeom Pyeon	https://orcid.org/0000-0001-8632-3828
Jinho Chae	https://orcid.org/0000-0002-7229-0700
Wooseok Oh	https://orcid.org/0000-0002-1578-6590
Doo Jin Hwang	https://orcid.org/0000-0003-3692-3774
Kyounghoon Lee	https://orcid.org/0000-0002-4226-9011

References

- Chen H, Zhang X, Che D, Zang D, Li X, Li Y. Synthetic effect of vivid shark skin and polymer additive on drag reduction reinforcement. *Adv Mech Eng*. 2014;6:425701.
- Chu WS, Lee KT, Song SH, Han MW, Lee JY, Kim HS, et al. Review of biomimetic underwater robots using smart actuators. *Int J Precis Eng Manuf*. 2012;13:1281-92.
- Dabiri JO, Colin SP, Katija K, Costello JH. A wake-based correlate of swimming performance and foraging behavior in seven co-occurring jellyfish species. *J Exp Biol*. 2010;213:1217-25.
- Flammang BE, Lauder GV, Troolin DR, Strand TE. Volumetric imaging of fish locomotion. *Biomechanics*. 2011;7:695-8.
- Fu YF, Yuan CQ, Bai XQ. Marine drag reduction of shark skin inspired riblet surfaces. *Biosurf Biotribol*. 2017;3:11-24.
- Kim JH. Hydrography characteristic relatives to boundary

- shape of stage type and fish's upstream migration. *J Water Resour Soc Korea*. 1996;29:102-14.
- Kim S, Pyeon Y, Lee K, Kim P, Oh W, Cho J. Visualization of rotational swimming patterns in oblate jellyfish. *J Coast Res*. 2019;36:289-94.
- Lim JL, Demont ME. Kinematics, hydrodynamics and force production of pleopods suggest jet-assisted walking in the American lobster (*Homarus americanus*). *J Exp Biol*. 2009;212:2731-45.
- Liu Y, Zhao Y, Dong G, Guan C, Cui Y, Xu TJ. A study of the flow field characteristics around star-shaped artificial reefs. *J Fluids Struct*. 2013;39:27-40.
- Luo Y, Wang J, Sun G, Li X, Liu Y. Experimental investigations on manufacturing different-shaped bio-inspired drag-reducing morphologies and hydrodynamic testing. *Exp Tech*. 2016;40:1129-36.
- Marras S, Porfiri M. Fish and robots swimming together: attraction towards the robot demands biomimetic locomotion. *J R Soc Interface*. 2012;9:1856-68.
- Murphy DW, Webster DR, Yen J. A high-speed tomographic PIV system for measuring zooplanktonic flow. *Limnol Oceanogr Methods*. 2012;10:1096-112.
- Pavlov V, Rosental B, Hansen NE, Beers JM, Parish G, Rowbotham I, et al. Hydraulic control of tuna fins: a role for the lymphatic system in vertebrate locomotion. *Science*. 2017;357:310-4.
- Shen Z, Na J, Wang Z. A biomimetic underwater soft robot inspired by cephalopod mollusc. *IEEE Robot Autom Lett*. 2017;2:2217-23.
- Szymak P, Przybylski M. Thrust measurement of biomimetic underwater vehicle with undulating propulsion. *Sci J Pol Nav Acad*. 2018;213:69-82.
- Zhang R, Shen Z, Zhong H, Tan J, Hu Y, Wang Z. A cephalopod-inspired soft-robotic siphon for thrust vectoring and flow rate regulation. *Soft Robot*. 2021;8:416-31.