

# Mini loop coil magnetic curer for peripheral nervous system treatment

## 말초신경계 치료를 위한 미니 Loop - 코일 삽입형 자기치료기

Kim Whi Young

Dongju College, Biomedical Engineering

**Abstract** - It is as result that study to apply mini magnet nerve curer in peripheral nervous system disease treatment. Design and embodied action power and Control Unit in cylinder form of magnet roof object firstly. Yielded service area about special quality of probe of roof object cylinder style and treatment area dimension and distance of treatment pulse secondly. Embody pulse forming course energy value by Probe's form by third, could embody treatment pulse by disease. Specially, through a special quality experiment, saved Damping pulse form and treatment pulse form etc. variously. Lately, embodied this to aid a little in disease treatment that follow that there is no invasion that there is no stimulation by medicine development. Go amplitude treatment pulse (traditional magneto-therapy of greatly great that strong .) does curative effect greatest at short time and becomes thought that demand is magnified greatly at the future in this research.

**Key Words** : peripheral nervous system, Damping pulse, Probe's, amplitude treatment pulse

### I. Introduction

Existent electricity stimulation radical touches directly in body, and can have sore but magnetic stimulation account is no contact, and application extent is widened extensively by muscle disease system etc., in various nerve diseases that there is no invasion. If explain living body effect about magnetic to basic principle, human body that is lain in the courteousness receives power failure induction and range charge for all direction on the human body surface. Because dielectric substance put among ago causes heredity polarization, electricity dipole that correspond for monetary unit is ranged, phenomenon that hair stands within strong electromagnetic is the example. Because hair receives force in, laudable custom is correct impression in about 200 kV/more than ms usually. If discharge happens in pointed end department of living body in hard fighting of 2,000 kV/more than ms, red heat stuff or skin if is surface of the body that feel mordant prompt by hands of a clock in relationship peripheral nerve influence can. Electromagnetic field's strength is not and difference of magnetic field house, direction of magnetic field, east or curl, dimension of part that strong magnetic field occurs or action time, other energy that do fire uniformity if is uniformity magnetic field, existence and nonexistence etc., of interference action can become an issue mutually with electric wave,

radiation, supersonic waves for example, and, induced current is passed in living body in interchange full length as life of telling kind passes in living body in interchange magnetic field. Electron energy can know heated point because is assimilated as is easy in living body. By thermo-genesis effect electromagnetic waves absorption of living body than 30MHz enough daytime in frequency because wave length is long fairly than size of living body living body size or anatomy of interior and interference with wave length almost have. by advantage that stimulation of deep and, wide region is possible and research is abuzz afoot vigorously self-discipline which magnetic stimulation radical changes by time. Finally, it is as result that study to apply magnetic nerve curer in peripheral nervous system disease treatment as is super beauty. Design and embodied control unit with action power in cylinder form of own roof object firstly. Secondly, yielded service area about special quality of probe of loop object cylinder style and treatment area dimension and distance of treatment pulse.

### II. Systems Design and Embodiment

#### 2.1 Power supply of super mini probe insertion style curer

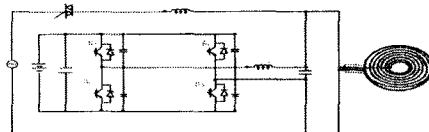


Fig. 1 Power supply of super mini coil probe own curer for peripheral nervous system treatment

\* 김휘영 : 동주대학 의료기공학과

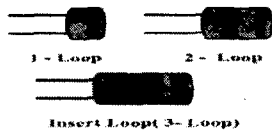


Fig.2 Insert Loop Coil Probe

One-phase full bridge inverter is consisted of center, and inverter acts by ZVS. Have by-pass mode and two action modes of backup mode even if power is expired. There is TRIAC in on state in By-pass mode and electric power is passed and do all current waveform improvements of uninterruptible power form and battery electrification almost directly as subordinate from entire membership. Output voltage is depended on power supply voltage in this mode. This time, can explain by flow of electric power if consider fundamental wave quantity of load current. Battery is and leaves out two in small charge (trickle charge) state if charging current ignores because is small all in because electric power that is flowed in is passed to all loads  $I_1$  following size have .

$$I_1 = \frac{V_2}{V_1} I_2 \cos \phi \quad \text{-----(1)}$$

Inverter supplies subordinate's nullity electric power and nullity electric power of power side does not pass. This action is same with nullity electric power compensation flag (SVC : Static VAR Compensator). Car current of flowing current is passed to inverter  $I_2 \sin \phi$  and capacitor  $C_p$  that is subordinate's nullity electric power minute. Is given as load voltage following.

$$\dot{V}_2 = \dot{V}_1 - jX_L \dot{I}_1 \quad \text{-----(2)}$$

Harmonic current that happen of inverter action is passed by this capacitor. Act by spontaneity electric power acceptor (Active Power Filter). If is cut off the electricity, must form interchange military strength being supplied electric power in Battery, and must deliver as subordinate because entire membership is supplied in commercial power if is gotten back again. Because become as power side is short-circuited as many subordinates who is coupled at power failure, did to shut off power side by TRIAC if is decided to cease-fire. At this process, control roof does switched but to do and do switched safety specification control circuit use . Because voltage that escape at zero-crossing neighborhood are small, reserve finding.

$$I_B = \frac{I_1 V_1 - I_2 V_2 \cos \phi}{V_{DC}} \quad \text{-----(3)}$$

U11C supplies same flag signal to logic circuit to happen being done winter season when switched of controller is zero-crossing of standard signal. Logic circuit part of circuit comes true by AVR Chip microprocessor. If accident is happened, processor TRIAC's gate signal immediately remove and controller does switched winter season to keep output voltage

of constant voltage domiciliation watch. Do controller switched winter season to input TRIAC's gate signal winter season and control input voltage if is gotten back in armistice. By next time, own pulse curer being electric field E that origin of action is acquired from Faradays law, is given by Biot-Savart rule in case is a magnetic field that B is produced by coil.  $4\pi \cdot 10^{-7}$  H/m can appear by permeability from freedom space, and have and act coil winding C A vector  $dI$  synthetically.

$$\mathbf{B}(\mathbf{r}, t) = \frac{\mu_0}{4\pi} I(t) \oint_C \frac{d\mathbf{l}(\mathbf{r}') \times (\mathbf{r} - \mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|^3} \quad \text{-----(5)}$$

Pulses of self-stimulation flag are occurred in near place of neurone in stimulated sacred ground, as well as, change to occurrence by synaptic input. In microscopic level, E with transmembrane voltage of neurone, and influence to voltage-sensitive ion channel by it. Brain imaging tools can be used and change in blood current of metabolism to find stream about mixed electricity. In motor-cortex stimulation, peripheral device effect can be observed as muscle activity to surface electromyography (EMG).

## 2.2 Loop-coil probe insert's design

Figure 4 displays Loop-coil probe's structure and design drawing. As see in figure 4, miniaturize size epochally and added 1 - roof, 2 - loop according to disease state, 3 - roof, 4 - loops, 5 - loop, 6 loops, 7 - loops, 8 - roof, 9 - loops, 10 - loops. Because done length 15cm, diameter 1.5cm, hole 0.5cm to be imposed in state that can scam again, design and manufactured. Composed so that ordinary people can use or anyone conveniently easy.

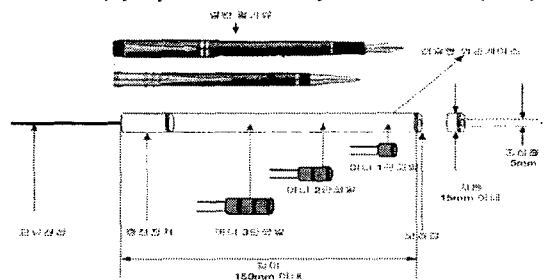


Fig.3 If is Loop-Coil probe composition and plan

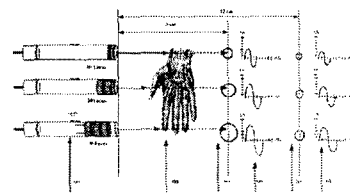


Fig.4 Loop-coil probe's output treatment pulse comparative analysis

Composed so that ordinary people can use or anyone conveniently easy. When it is 1 - when it is loop, treatment pulse is 0.5kA, 2 - loop, treatment pulse is 0.75kA, and when it is 3 -

when it is loop, treatment pulse is 1kA, 4 - loops, treatment pulse is 1.3kA, and when it is 5 - when it is loop, treatment pulse is 1.6kA, 6 - loops, treatment pulse is 2kA, and when it is 7 - when it is loop, treatment pulse is 2.3kA, 8 - loops, treatment pulse is 2.6kA, and approximate and is less than 1/10 in price because output gouges 70% than system that when it is 9 - when it is loop, treatment pulse is 2.9kA, 10 - loops, treatment pulse is general by 3kA degree, and it becomes thought that do not fall behind entirely on 1/100, performance side in bulk aspect. According to room, especially disease pipe of note treatment, human body is account book, and is healthy if function is harmonized each other, but do that various kinds symptoms show because is cankered if floral tributes scatters. Spoke that is "Five chairmans are not wealthy because keeping spirit and energy, have not poured and fill, and because caruncle hands down parcel without keeping, do not fill because is healthy. Also, account book is explaining functional correlation by oriental nat. phil. called sun and the moon five elements New Year depending on five elements. Is used into inside of the stomach-heart-intention of body inside and so on usually. Because there are six market days of the month and caruncle in tenon, there is politico-economic 12 wonders which name of each account book sticks to blood vessel corresponding to this, there are 8 pulses about mourning besides. Though there is 2 stimulation flag type, it is single pulse devices and devices that repeat that lay stimuli's train in 60Hz in 1. Can have that is added to their single pulsation devices could use to drive 1 coil in pulsations that is classed by 1 to 1 ms module. Can do better control in space wide area of stimulation.

### III. Experiment Result

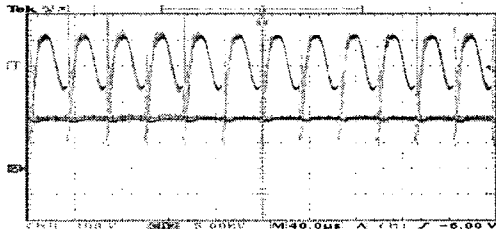


Figure 5 . High tension output (400V), coil both end output (9 K V),(10 K V)

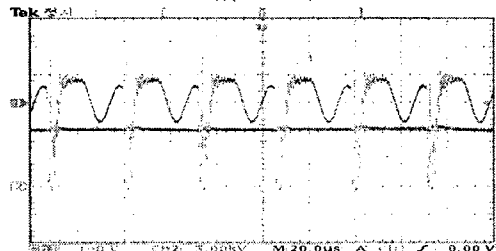


Figure 6 . High tension output (420V), coil both end output (12 K V),(423V)

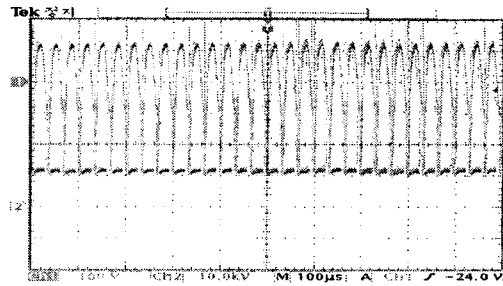


Figure 7 . High tension output (430V), coil both end output (12 K V),(433V)

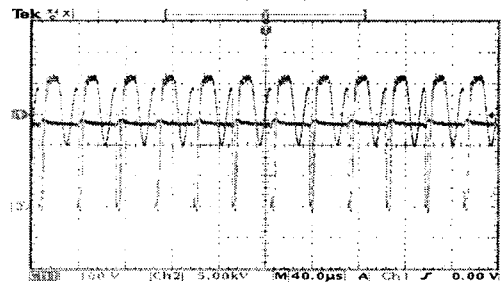


Figure 8 . High tension output (435V), coil both end output (13 K V),(438V)

### IV. Conclusion

Magnetic Filed that Magnetic stimulation radical changes by time without deriving Electronic Field on human body interior invasion, come at recent times to tip of a twig nerve, brain disease, cranial nerve, muscular power, main point incontinence, old man disease, myopathy, Rehabilitation treatment by advantage that stimulation of wide region is possible and research is progress middle abuzz vigorously. It is as result that study to apply Super mini magnetic nerve curer in peripheral nervous system disease treatment. Firstly, design and embodied control unit with action power in cylinder form of magnetic loop object. Secondly, yielded service area about special quality of probe of roof object cylinder style and treatment area dimension and treatment pulse's distance. Thirdly, embodied pulse forming and energy value by probe's form. Could embody treatment pulse by war.

### References

- [1] P. Loosen, "Recent Development of lasers for Materials Processing", Proc of LAMP '92, Nagaoka, Vol. 1, pp.61-66 (1992)
- [2] J.K.R. Weber, J.J. Felten and P.C. Nordine, "laser Hearth Melt Processing of Ceramic Materials," Rev. Sci. Instrum. 67, pp.522-524 (1996)
- [3] W.Y.Kim," The new type pulsed Nd:YAG laser power supply employed multi-amplification method" ACED-2000